

Hong Kong
CANATECH SOLUTIONS

T: +1 844 734 6533
E: hktdc@canatechsolutions.com
W: www.canatechsolutions.com
A: Unit 603A, 6/F, Tower 1
Admiralty Centre, 18 Harcourt Rd
Hong Kong

PRODUCT CATALOGUE

TECHNICAL OFFICE
LIGHTING

NONO



ABOUT US



Established in 2023 by a visionary founder with eight years of expertise in the lighting industry, PCD Lighting is a manufacturing enterprise dedicated to architectural office lighting. The name PCD, standing for Premium, Creative, Designs, encapsulates our brand ethos of delivering high-quality, innovative, and independently designed lighting products.

Specializing in indoor lighting solutions for office spaces, PCD Lighting offers meticulously crafted, in-house developed products tailored to meet the needs of global markets, including North America, Europe, Australia, and the Middle East. Our mission is to create healthy and comfortable lighting environments, enhancing user experiences and improving well-being through superior light quality.


At PCD Lighting, we are committed to advancing the pursuit of exceptional lighting, partnering with our clients to deliver lasting value and transformative illumination solutions that inspire productivity and comfort.





01 — P 03
Linear Light
System Luminaires



02 — P 13
Pendant
Luminaires




03 — P 29
Ceiling Mounted
Luminaires



04 — P 47
Recessed
luminaires



05 — P 71
Wall Mounted
Luminaires



06 — P 85
Free-Standing
Luminaires



07 — P 89
Desk Mounted
Luminaires



CONTENTS



PRODUCT CODE

TECHNICAL OFFICE LIGHTING

Product Name

FL: Fineline
NR: Nora
SS: Skyspace
And so on

Distribution

DR: Only Direct
ID: Indirect/Direct

Product size

Linear lamp (By length)
Round lamp (By diameter)
Floor lamp (By Lamp head length)
Panel lamp (By Width x Length)
12: The length is about 1.2m
15: The length is about 1.5m
45: The diameter is about 450mm
11: The lamp head is 1.1m6
6:The width xlength is 595mm x595mm
612: The width xlength is 595mmx1195mm

Total power

030 : 30W
060 : 60W

CCT Dimmable
(Free standing luminaires)

B: Basic Function
C: CCT Changeable

Dimmable function
(Other types of luminaires)

N: On/Off
D: Dali
V:1-10V/PWM
T: Triac
W: Wireless

Mounting Solution

P: Pendant
C: Ceiling
W: Wall Mount
R: Recessed
T:Trimless Recessed
S: Stem Pendant
F: Free-Standing
D: Desk Mount

Function Optional

M: Motion Sensor
D: Daylight Sensor
E: Emergency

01

LINEAR LIGHT SYSTEM LUMINAIRES

TECHNICAL OFFICE
LIGHTING





Slimline-P

General Lighting Fixtures


CE

220-240v
50/60Hz

IP20

DMIMABLE

5 YEARS
WARRAANTY

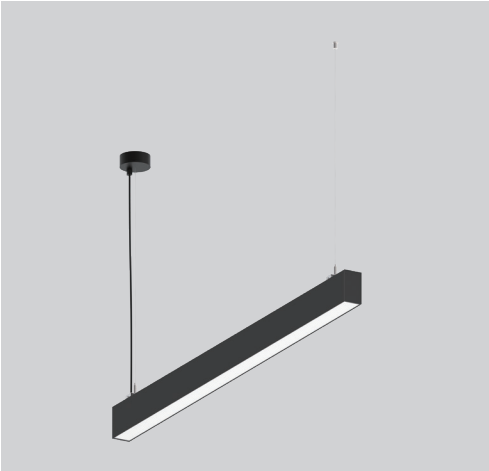

Key Features

- Luminaire housing made of extruded aluminium profile.
- No visible screws, excellent surface powder coated.
- Visual comfort and uniform illumination.
- Lengths could be bespoke according to specification.

Performance Summary

Size	1198mm	1498mm	2390mm	2990mm
Wattage	30W ↓	38W ↓	60W ↓	76W ↓
Lumens	3600lm ↓	4600lm ↓	7200lm ↓	9200lm ↓
Wattage	14W ↑ + 34W ↓	18W ↑ + 42W ↓	28W ↑ + 68W ↓	36W ↑ + 84W ↓
Lumens	1900lm ↑ + 3800lm ↓	2400lm ↑ + 4800lm ↓	3800lm ↑ + 7600lm ↓	4800lm ↑ + 9600lm ↓
CCT	3000K / 4000K / 6000K			
CRI	>80			
Beam Angle	130° ↑ / 80° ↓			
UGR	<21			
Colors	White / Black / Silver			
Dimming	On/Off / DALI / 1-10V / Casambi Wireless			
Lifetime	50,000Hrs, L80 (B10)			
Material	Aluminum Profile; Microprismatic or Opal Lens			
Warranty	5 years			

Application:


Offices,Commercial,Education,Healthcare, Retailing

Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
SL-DR12030-N/D/V-P	1198mm	30W	3600lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
SL-DR15038-N/D/V-P	1498mm	38W	4600lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
SL-DR24060-N/D/V-P	2390mm	60W	7200lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
SL-DR30076-N/D/V-P	2990mm	76W	9200lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V

Indirect/Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
SL-ID12048-N/D/V-P	1198mm	48W	1900lm ↑ + 3800lm ↓	>80	3000/4000/6000K	130° ↑ / 80° ↓	N: On/Off / D: DALI / V: 1-10V
SL-ID15060-N/D/V-P	1498mm	60W	2400lm ↑ + 4800lm ↓	>80	3000/4000/6000K	130° ↑ / 80° ↓	N: On/Off / D: DALI / V: 1-10V
SL-ID24096-N/D/V-P	2390mm	96W	3800lm ↑ + 7600lm ↓	>80	3000/4000/6000K	130° ↑ / 80° ↓	N: On/Off / D: DALI / V: 1-10V
SL-ID30120-N/D/V-P	2990mm	120W	4800lm ↑ + 9600lm ↓	>80	3000/4000/6000K	130° ↑ / 80° ↓	N: On/Off / D: DALI / V: 1-10V



Dimension





Application:


Office, Commercial, Education, Healthcare, Retailing

Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
FL-DR12030-N/D/V-P	1194mm	30W	3600lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
FL-DR15038-N/D/V-P	1491mm	38W	4600lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
FL-DR24060-N/D/V-P	2382mm	60W	7200lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
FL-DR30076-N/D/V-P	2976mm	76W	9200lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V

Indirect/Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
FL-ID12048-N/D/V-P	1194mm	48W	1900lm ↑ + 3800lm ↓	>80	3000/4000/6000K	130° ↑ / 80° ↓	N: On/Off / D: DALI / V: 1-10V
FL-ID15060-N/D/V-P	1491mm	60W	2400lm ↑ + 4800lm ↓	>80	3000/4000/6000K	130° ↑ / 80° ↓	N: On/Off / D: DALI / V: 1-10V
FL-ID24096-N/D/V-P	2382mm	96W	3800lm ↑ + 7600lm ↓	>80	3000/4000/6000K	130° ↑ / 80° ↓	N: On/Off / D: DALI / V: 1-10V
FL-ID30120-N/D/V-P	2976mm	120W	4800lm ↑ + 9600lm ↓	>80	3000/4000/6000K	130° ↑ / 80° ↓	N: On/Off / D: DALI / V: 1-10V



Fineline-P

General Lighting Fixtures

CE

220-240v
50/60Hz


IP20

DMIMABLE

5 YEARS
WARRAANTY

Key Features

- Luminaire housing made of extruded aluminium profile.
- No visible screws, excellent surface powder coated.
- Visual comfort and uniform illumination.
- Lengths could be bespoke according to specification.

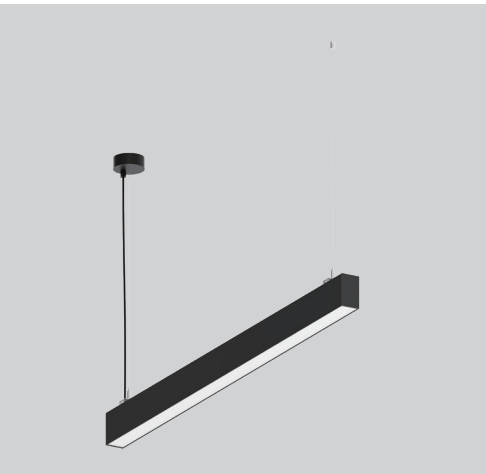

Performance Summary

Size	1194mm	1491mm	2382mm	2976mm
Wattage	30W ↓	38W ↓	60W ↓	76W ↓
Lumens	3600lm ↓	4600lm ↓	7200lm ↓	9200lm ↓
Wattage	14W ↑ + 34W ↓	18W ↑ + 42W ↓	28W ↑ + 68W ↓	36W ↑ + 84W ↓
Lumens	1900lm ↑ + 3800lm ↓	2400lm ↑ + 4800lm ↓	3800lm ↑ + 7600lm ↓	4800lm ↑ + 9600lm ↓
CCT	3000K / 4000K / 6000K			
CRI	>80			
Beam Angle	130° ↑ / 80° ↓			
UGR	<21			
Colors	White / Black / Silver			
Dimming	On/Off / DALI / 1-10V / Casambi Wireless			
Lifetime	50,000Hrs, L80 (B10)			
Material	Aluminum Profile; Microprismatic or Opal Lens			
Warranty	5 years			

Dimension





Application:


Offices,Commercial,Education,Healthcare, Retailing

Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
UL-DR12030-N/D/V-P	1198mm	30W	3600lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
UL-DR15040-N/D/V-P	1498mm	40W	4800lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
UL-DR24060-N/D/V-P	2390mm	60W	7200lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
UL-DR30080-N/D/V-P	2990mm	80W	9600lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V

Indirect/Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
UL-ID12050-N/D/V-P	1198mm	50W	2200lm ↑ + 4000lm ↓	>80	3000/4000/6000K	130° ↑ / 80° ↓	N: On/Off / D: DALI / V: 1-10V
UL-ID15060-N/D/V-P	1498mm	62W	2750lm ↑ + 5000lm ↓	>80	3000/4000/6000K	130° ↑ / 80° ↓	N: On/Off / D: DALI / V: 1-10V
UL-ID24100-N/D/V-P	2390mm	100W	4400lm ↑ + 8000lm ↓	>80	3000/4000/6000K	130° ↑ / 80° ↓	N: On/Off / D: DALI / V: 1-10V
UL-ID30124-N/D/V-P	2990mm	124W	5500lm ↑ + 10000lm ↓	>80	3000/4000/6000K	130° ↑ / 80° ↓	N: On/Off / D: DALI / V: 1-10V



Ultraline-P

General Lighting Fixtures

CE

220-240v
50/60Hz


IP20

DMIMABLE

5 YEARS
WARRAANTY

Key Features


- Luminaire housing made of extruded aluminium profile.
- No visible screws, excellent surface powder coated.
- Visual comfort and uniform illumination.
- Lengths could be bespoke according to specification.

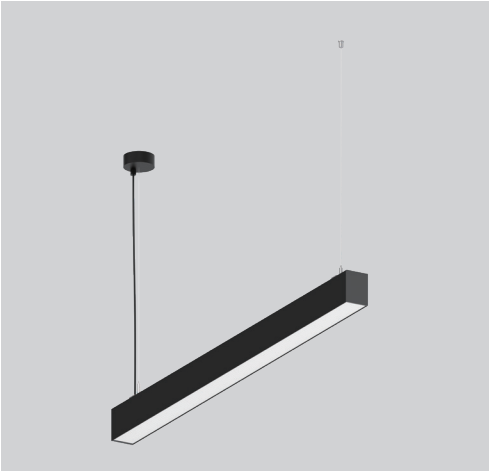

Performance Summary

Size	1198mm	1498mm	2390mm	2990mm
Wattage	30W ↓	40W ↓	60W ↓	80W ↓
Lumens	3600lm ↓	4800lm ↓	7200lm ↓	9600lm ↓
Wattage	16W ↑ + 34W ↓	20W ↑ + 42W ↓	32W ↑ + 68W ↓	40W ↑ + 84W ↓
Lumens	2200lm ↑ + 4000lm ↓	2750lm ↑ + 5000lm ↓	4400lm ↑ + 8000lm ↓	5500lm ↑ + 10000lm ↓
CCT	3000K / 4000K / 6000K			
CRI	>80			
Beam Angle	130° ↑ / 80° ↓			
UGR	<21			
Colors	White / Black / Silver			
Dimming	On/Off / DALI / 1-10V / Casambi Wireless			
Lifetime	50,000Hrs, L80 (B10)			
Material	Aluminum Profile; Microprismatic or Opal Lens			
Warranty	5 years			

Dimension

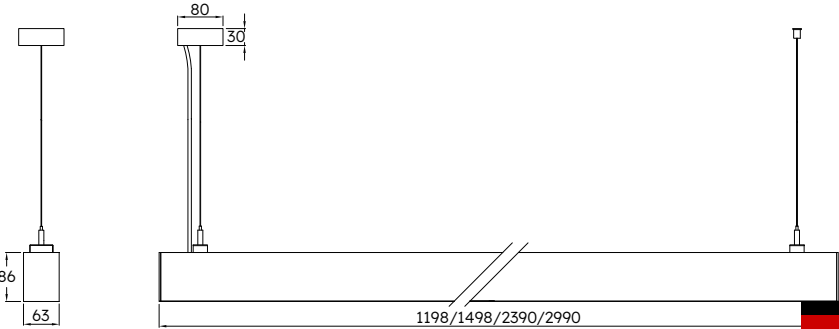



Visionline-P

General Lighting Fixtures

CE

220-240v
50/60Hz

IP20

DMIMABLE

5 YEARS
WARRAANTY



Key Features

- Luminaire housing made of extruded aluminium profile.
- No visible screws, excellent surface powder coated.
- Visual comfort and uniform illumination.
- Lengths could be bespoke according to specification.

Performance Summary

Size	1126mm	1406mm
Wattage	25W ↓	31W ↓
Lumens	3200lm ↓	4000lm ↓
Wattage	13W ↑ + 25W ↓	16W ↑ + 32W ↓
Lumens	1600lm ↑ +3200lm ↓	2000lm ↑ + 4000lm ↓
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	130° ↑ / 80° ↓	
UGR	<16	
Colors	White / Black	
Dimming	On/Off / DALI / 1-10V / Casambi Wireless	
Lifetime	50,000Hrs, L80 (B10)	
Material	Aluminum Profile; Microprismatic or Opal Lens	
Warranty	5 years	

Application:


Offices,Commercial,Education,Healthcare, Retailing

Direct Series


Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
VL-DR12025-N/D/V-P	1126mm	25W	3200lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
VL-DR15031-N/D/V-P	1406mm	31W	4000lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V

Indirect/Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
VL-ID12038-N/D/V-P	1126mm	38W	1600lm ↑ +3200lm ↓	>80	3000/4000/6000K	130° ↑ / 80° ↓	N: On/Off / D: DALI / V: 1-10V
VL-ID15048-N/D/V-P	1406mm	480W	2000lm ↑ + 4000lm ↓	>80	3000/4000/6000K	130° ↑ / 80° ↓	N: On/Off / D: DALI / V: 1-10V



Dimension

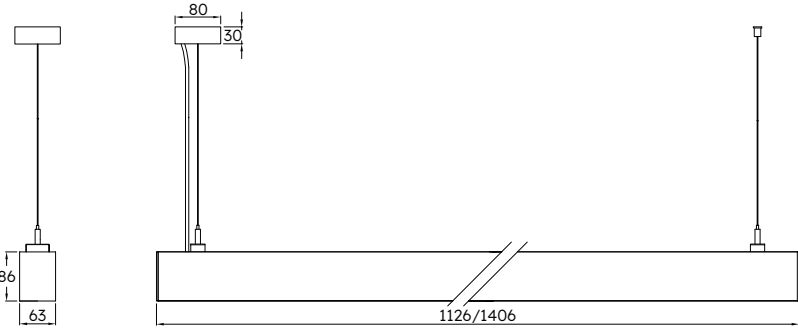

02

PENDANT LUMINAIRES

TECHNICAL OFFICE
LIGHTING





Nora-P

General Lighting Fixtures



CE



220-240v
50/60Hz



IP20



DMIMABLE



5 YEARS
WARRAANTY

Key Features

- Luminaire housing made of extruded aluminium profile.
- No visible screws, excellent surface powder coated.
- Visual comfort and uniform illumination.
- Lengths could be bespoke according to specification.



Performance Summary

Size	450mm	600mm	900mm
Wattage	30W ↓	40W ↓	80W ↓
Lumens	3300lm ↓	5400lm ↓	11200lm ↓
Wattage	10W ↑ +28W ↓	14W ↑ +36W ↓	28W ↑ +72W ↓
Lumens	1300lm ↑ +3100lm ↓	2000lm ↑ +4800lm ↓	4000lm ↓ +10000lm ↓
CCT	3000K / 4000K / 6000K		
CRI	>80		
Beam Angle	120° ↑ / 90° ↓		
UGR	<19		
Colors	White / Black / Silver		
Dimming	On/Off / DALI / 1-10V / Casambi Wireless		
Lifetime	50,000Hrs, L80 (B10)		
Material	Aluminum frame; PMMA LGP, Microprismatic or Opal Diffuser		
Warranty	5 years		

Application:


Office, Commercial, Education, Healthcare

Direct Series


Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
NR-DR45030-N/D/V-P	Φ450mm	30W	3300lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
NR-DR60040-N/D/V-P	Φ600mm	40W	5400lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
NR-DR90080-N/D/V-P	Φ900mm	80W	11200lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V

Indirect/Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
NR-ID45040-N/D/V-P	Φ450mm	38W	1300lm ↑ +3100lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
NR-ID60050-N/D/V-P	Φ600mm	50W	2000lm ↑ +4800lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
NR-ID90100-N/D/V-P	Φ900mm	100W	4000lm ↓ +10000lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V



Dimension

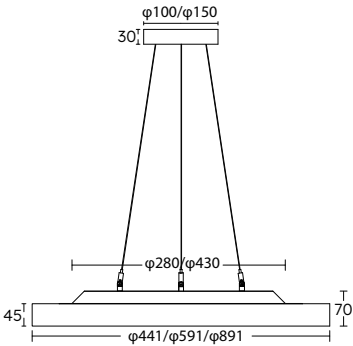



Application:


Office, Commercial, Education, Healthcare, Hospitality

Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
SR-DR35020-N/D/V-P	Φ350mm	20W	2000lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-DR45030-N/D/V-P	Φ450mm	30W	3300lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-DR60040-N/D/V-P	Φ600mm	40W	4800lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-DR90080-N/D/V-P	Φ900mm	80W	10400lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-DR120100-N/D/V-P	Φ1200mm	100W	13500lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V

Indirect/Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
SR-ID35030-N/D/V-P	Φ350mm	30W	1200lm ↑ +2000lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID45045-N/D/V-P	Φ450mm	45W	2000lm ↑ +3300lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID60060-N/D/V-P	Φ600mm	60W	2800lm ↑ +4800lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID90100-N/D/V-P	Φ900mm	100W	4200lm ↓ +9500lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID120120-N/D/V-P	Φ1200mm	120W	5600lm ↑ +10800lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V



General Lighting Fixtures

CE

220-240v
50/60Hz

IP20

DMIMABLE

5 YEARS
WARRAANTY

Key Features


- Seamless aluminum frame with visual comfort opal/prismatic diffuser.
- Lightguide and diffuser made of non-yellowing plastic (PMMA).
- 5 sizes and versatile installation better for spaces design.
- Driver integrated and easy installation.



Performance Summary

Size	350mm	450mm	600mm	900mm	1200mm
Wattage	20W ↓	30W ↓	40W ↓	80W ↓	100W ↓
Lumens	2000lm ↓	3300lm ↓	4800lm ↓	10400lm ↓	13500lm ↓
Wattage	10W ↑ +20W ↓	15W ↑ +30W ↓	20W ↑ +40W ↓	30W ↑ +70W ↓	40W ↑ + 80W ↓
Lumens	1200lm ↑ +2000lm ↓	2000lm ↑ +3300lm ↓	2800lm ↑ +4800lm ↓	4200lm ↓ +9500lm ↓	5600lm ↑ +10800lm ↓
CCT	3000K / 4000K / 6000K				
CRI	>80				
Beam Angle	120° ↑ / 90° ↓				
UGR	UGR<19				
Colors	White / Black / Silver				
Dimming	On/Off / DALI / 1-10V / Casambi Wireless				
Lifetime	50,000Hrs L80 B10				
Material	Aluminum frame; PMMA LGP, Microprismatic or Opal Diffuser				
Warranty	5 years				

Dimension





Sora-P1

General Lighting Fixtures

CE

220-240v
50/60Hz

IP20

DMIMABLE

5 YEARS
WARRAANTY

Key Features

- Seamless aluminum frame with visual comfort opal/prismatic diffuser.
- Lightguide and diffuser made of non-yellowing plastic (PMMA).
- 5 sizes and versatile installation better for spaces design.
- Driver integrated and easy installation.



Performance Summary

Size	350mm	450mm	600mm	900mm	1200mm
Wattage	20W ↓	30W ↓	40W ↓	80W ↓	100W ↓
Lumens	2000lm ↓	3300lm ↓	4800lm ↓	10400lm ↓	13500lm ↓
Wattage	10W ↑ +20W ↓	15W ↑ +30W ↓	20W ↑ +40W ↓	30W ↑ +70W ↓	40W ↑ + 80W ↓
Lumens	1200lm ↑ +2000lm ↓	2000lm ↑ +3300lm ↓	2800lm ↑ +4800lm ↓	4200lm ↓ +9500lm ↓	5600lm ↑ +10800lm ↓
CCT	3000K / 4000K / 6000K				
CRI	>80				
Beam Angle	120° ↑ / 90° ↓				
UGR	UGR<19				
Colors	White / Black / Silver				
Dimming	On/Off / DALI / 1-10V / Casambi Wireless				
Lifetime	50,000Hrs L80 B10				
Material	Aluminum frame; PMMA LGP, Microprismatic or Opal Diffuser				
Warranty	5 years				

Application:


Office, Commercial, Education, Healthcare, Hospitality

Direct Series


Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
SR-DR35020-N/D/V-P1	Φ350mm	20W	2000lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-DR45030-N/D/V-P1	Φ450mm	30W	3300lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-DR60040-N/D/V-P1	Φ600mm	40W	4800lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-DR90080-N/D/V-P1	Φ900mm	80W	10400lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-DR120100-N/D/V-P1	Φ1200mm	100W	13500lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V

Indirect/Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
SR-ID35030-N/D/V-P1	Φ350mm	30W	1200lm ↑ +2000lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID45045-N/D/V-P1	Φ450mm	45W	2000lm ↑ +3300lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID60060-N/D/V-P1	Φ600mm	60W	2800lm ↑ +4800lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID90100-N/D/V-P1	Φ900mm	100W	4200lm ↓ +9500lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID120120-N/D/V-P1	Φ1200mm	120W	5600lm ↑ +10800lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V



Dimension





Noma-P

General Lighting Fixtures

CE

220-240v
50/60Hz

IP20

DMIMABLE

5 YEARS
WARRAANTY



Key Features

- Seamless aluminum frame with visual comfort opal/prismatic diffuser.
- Lightguide and diffuser made of non-yellowing plastic (PMMA).
- 5 sizes and versatile installation better for spaces design.
- Driver integrated and easy installation.

Performance Summary

Size	350mm	450mm	600mm	900mm	1200mm
Wattage	20W ↓	30W ↓	40W ↓	80W ↓	100W ↓
Lumens	2000lm ↓	3300lm ↓	4800lm ↓	10400lm ↓	13500lm ↓
Wattage	10W ↑ +20W ↓	15W ↑ +30W ↓	20W ↑ +40W ↓	30W ↑ +70W ↓	40W ↑ + 80W ↓
Lumens	1200lm ↑ +2000lm ↓	2000lm ↑ +3300lm ↓	2800lm ↑ +4800lm ↓	4200lm ↓ +9500lm ↓	5600lm ↑ +10800lm ↓
CCT	3000K / 4000K / 6000K				
CRI	>80				
Beam Angle	120° ↑ / 90° ↓				
UGR	UGR<19				
Colors	White / Black / Silver				
Dimming	On/Off / DALI / 1-10V / Casambi Wireless				
Lifetime	50,000Hrs L80 B10				
Material	Aluminum frame; PMMA LGP, Microprismatic or Opal Diffuser				
Warranty	5 years				

Application:


Office, Commercial, Education, Healthcare, Hospitality

Direct Series


Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
NM-DR35020-N/D/V-P	Φ350mm	20W	2000lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
NM-DR45030-N/D/V-P	Φ450mm	30W	3300lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
NM-DR60040-N/D/V-P	Φ600mm	40W	4800lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
NM-DR90080-N/D/V-P	Φ900mm	80W	10400lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
NM-DR120100-N/D/V-P	Φ1200mm	100W	13500lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V

Indirect/Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
NM-ID35030-N/D/V-P	Φ350mm	30W	1200lm ↑ +2000lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
NM-ID45045-N/D/V-P	Φ450mm	45W	2000lm ↑ +3300lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
NM-ID60060-N/D/V-P	Φ600mm	60W	2800lm ↑ +4800lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
NM-ID90100-N/D/V-P	Φ900mm	100W	4200lm ↓ +9500lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
NM-ID120120-N/D/V-P	Φ1200mm	120W	5600lm ↑ +10800lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V



Dimension





Application:

Office, Commercial, Education, Healthcare

Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
NR-DR45030-N/D/V-S	Φ450mm	30W	3300lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
NR-DR60040-N/D/V-S	Φ600mm	40W	5400lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
NR-DR90080-N/D/V-S	Φ900mm	80W	11200lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V

Indirect/Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
NR-ID45040-N/D/V-S	Φ450mm	38W	1300lm ↑ +3100lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
NR-ID60050-N/D/V-S	Φ600mm	50W	2000lm ↑ +4800lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
NR-ID90100-N/D/V-S	Φ900mm	100W	4000lm ↓ +10000lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V

General Lighting Fixtures

CE

220-240v
50/60Hz

IP20

DMIMABLE

5 YEARS
WARRAANTY

Key Features


- Seamless bended aluminum housing with excellent workmanship.
- High quality surface powder coated and support color bespoke.
- Backlit design and Light efficiency up to 130lm/W



Performance Summary

Size	450mm	600mm	900mm
Wattage	30W ↓	40W ↓	80W ↓
Lumens	3300lm ↓	5400lm ↓	11200lm ↓
Wattage	10W ↑ +28W ↓	14W ↑ +36W ↓	28W ↑ +72W ↓
Lumens	1300lm ↑ +3100lm ↓	2000lm ↑ +4800lm ↓	4000lm ↓ +10000lm ↓
CCT	3000K / 4000K / 6000K		
CRI	>80		
Beam Angle	120° ↑ / 90° ↓		
UGR	<19		
Colors	White / Black / Silver		
Dimming	On/Off / DALI / 1-10V / Casambi Wireless		
Lifetime	50,000Hrs, L80 (B10)		
Material	Aluminum frame; PMMA LGP, Microprismatic or Opal Diffuser		
Warranty	5 years		

Dimension

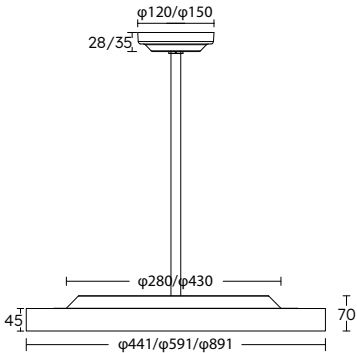



Application:

Office, Commercial, Education, Healthcare, Hospitality

Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
SR-DR35020-N/D/V-S	Φ350mm	20W	2000lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-DR45030-N/D/V-S	Φ450mm	30W	3300lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-DR60040-N/D/V-S	Φ600mm	40W	4800lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-DR90080-N/D/V-S	Φ900mm	80W	10400lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-DR120100-N/D/V-S	Φ1200mm	100W	13500lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V

Indirect/Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
SR-ID35030-N/D/V-S	Φ350mm	30W	1200lm ↑ +2000lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID45045-N/D/V-S	Φ450mm	45W	2000lm ↑ +3300lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID60060-N/D/V-S	Φ600mm	60W	2800lm ↑ +4800lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID90100-N/D/V-S	Φ900mm	100W	4200lm ↓ +9500lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID120120-N/D/V-S	Φ1200mm	120W	5600lm ↑ +10800lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V

Linear Light System Luminaires

Pendant Luminaires

Ceiling Mounted Luminaires

Recessed luminaires

Wall Mounted Luminaires

Free-Standing Luminaires

Desk Mounted Luminaires

Sora-S

General Lighting Fixtures

CE

220-240v
50/60Hz

IP20

DMIMABLE

5 YEARS
WARRAANTY

Key Features



- Seamless aluminum frame with visual comfort opal/prismatic diffuser.
- Lightguide and diffuser made of non-yellowing plastic (PMMA).
- 5 sizes and versatile installation better for spaces design.
- Driver integrated and easy installation.



Performance Summary

Size	350mm	450mm	600mm	900mm	1200mm
Wattage	20W ↓	30W ↓	40W ↓	80W ↓	100W ↓
Lumens	2000lm ↓	3300lm ↓	4800lm ↓	10400lm ↓	13500lm ↓
Wattage	10W ↑ +20W ↓	15W ↑ +30W ↓	20W ↑ +40W ↓	30W ↑ +70W ↓	40W ↑ + 80W ↓
Lumens	1200lm ↑ +2000lm ↓	2000lm ↑ +3300lm ↓	2800lm ↑ +4800lm ↓	4200lm ↓ +9500lm ↓	5600lm ↑ +10800lm ↓
CCT	3000K / 4000K / 6000K				
CRI	>80				
Beam Angle	120° ↑ / 90° ↓				
UGR	UGR<19				
Colors	White / Black / Silver				
Dimming	On/Off / DALI / 1-10V / Casambi Wireless				
Lifetime	50,000Hrs L80 B10				
Material	Aluminum frame; PMMA LGP, Microprismatic or Opal Diffuser				
Warranty	5 years				

Dimension





Sora-S1

General Lighting Fixtures



CE



220-240v
50/60Hz



IP20



DMIMABLE



5 YEARS
WARRAANTY

Key Features


- Seamless aluminum frame with visual comfort opal/prismatic diffuser.
- Lightguide and diffuser made of non-yellowing plastic (PMMA).
- 5 sizes and versatile installation better for spaces design.
- Driver integrated and easy installation.



Performance Summary

Size	340mm	440mm	590mm	890mm	1190mm
Wattage	20W ↓	30W ↓	40W ↓	80W ↓	100W ↓
Lumens	2000lm ↓	3300lm ↓	4800lm ↓	10400lm ↓	13500lm ↓
Wattage	10W ↑ +20W ↓	15W ↑ +30W ↓	20W ↑ +40W ↓	30W ↑ +70W ↓	40W ↑ + 80W ↓
Lumens	1200lm ↑ +2000lm ↓	2000lm ↑ +3300lm ↓	2800lm ↑ +4800lm ↓	4200lm ↓ +9500lm ↓	5600lm ↑ +10800lm ↓
CCT	3000K / 4000K / 6000K				
CRI	>80				
Beam Angle	120° ↑ / 90° ↓				
UGR	UGR<19				
Colors	White / Black / Silver				
Dimming	On/Off / DALI / 1-10V / Casambi Wireless				
Lifetime	50,000Hrs L80 B10				
Material	Aluminum frame; PMMA LGP, Microprismatic or Opal Diffuser				
Warranty	5 years				

Dimension

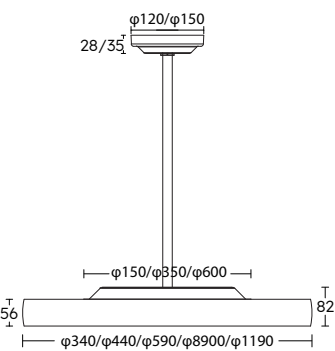

Application:

Office, Commercial, Education, Healthcare, Hospitality

Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
SR-DR35020-N/D/V-S1	Φ350mm	20W	2000lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-DR45030-N/D/V-S1	Φ450mm	30W	3300lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-DR60040-N/D/V-S1	Φ600mm	40W	4800lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-DR90080-N/D/V-S1	Φ900mm	80W	10400lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-DR120100-N/D/V-S1	Φ1200mm	100W	13500lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V

Indirect/Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
SR-ID35030-N/D/V-S1	Φ350mm	30W	1200lm ↑ +2000lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID45045-N/D/V-S1	Φ450mm	45W	2000lm ↑ +3300lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID60060-N/D/V-S1	Φ600mm	60W	2800lm ↑ +4800lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID90100-N/D/V-S1	Φ900mm	100W	4200lm ↓ +9500lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID120120-N/D/V-S1	Φ1200mm	120W	5600lm ↑ +10800lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V

03

CEILING MOUNTED LUMINAIRES

TECHNICAL OFFICE
LIGHTING





Slimline-C

General Lighting Fixtures


CE

220-240v
50/60Hz

IP20

DMIMABLE

5 YEARS
WARRAANTY

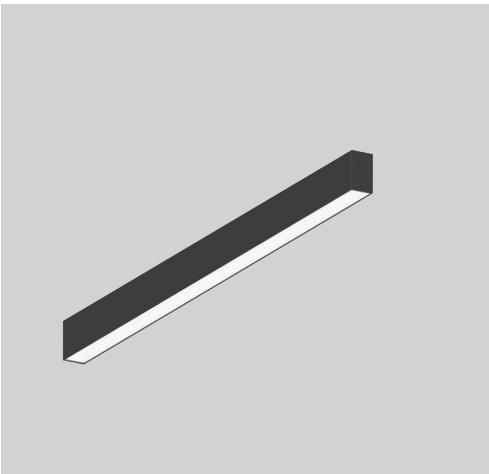

Key Features

- Luminaire housing made of extruded aluminium profile.
- No visible screws, excellent surface powder coated.
- Visual comfort and uniform illumination.
- Lengths could be bespoke according to specification.

Performance Summary


Size	1198mm	1498mm	2390mm	2990mm
Wattage	30W ↓	38W ↓	60W ↓	76W ↓
Lumens	3600lm ↓	4600lm ↓	7200lm ↓	9200lm ↓
CCT	3000K / 4000K / 6000K			
CRI	>80			
Beam Angle	80° ↓			
UGR	<21			
Colors	White / Black / Silver			
Dimming	On/Off / DALI / 1-10V / Casambi Wireless			
Lifetime	50,000Hrs, L80 (B10)			
Material	Aluminum Profile; Microprismatic or Opal Lens			
Warranty	5 years			

Application:


Office, Commercial, Education, Healthcare, Retailing

Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
SL-DR12030-N/D/V-C	1198mm	30W	3600lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
SL-DR15038-N/D/V-C	1498mm	38W	4600lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
SL-DR24060-N/D/V-C	2390mm	60W	7200lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
SL-DR30076-N/D/V-C	2990mm	76W	9200lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V



Dimension





Fineline-C

General Lighting Fixtures


CE

220-240v
50/60Hz

IP20

DMIMABLE

5 YEARS
WARRAANTY

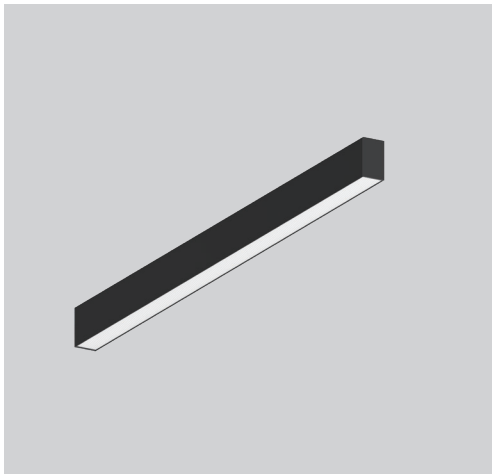

Key Features

- Luminaire housing made of extruded aluminium profile.
- No visible screws, excellent surface powder coated.
- Visual comfort and uniform illumination.
- Lengths could be bespoke according to specification.

Performance Summary


Size	1194mm	1491mm	2382mm	2976mm
Wattage	30W ↓	38W ↓	60W ↓	76W ↓
Lumens	3600lm ↓	4600lm ↓	7200lm ↓	9200lm ↓
CCT	3000K / 4000K / 6000K			
CRI	>80			
Beam Angle	80° ↓			
UGR	<21			
Colors	White / Black / Silver			
Dimming	On/Off / DALI / 1-10V / Casambi Wireless			
Lifetime	50,000Hrs, L80 (B10)			
Material	Aluminum Profile; Microprismatic or Opal Lens			
Warranty	5 years			

Application:


Office, Commercial, Education, Healthcare, Retailing

Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
FL-D12030-N/D/V-C	1194mm	30W	3600lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
FL-D15038-N/D/V-C	1491mm	38W	4600lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
FL-D24060-N/D/V-C	2382mm	60W	7200lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
FL-D30076-N/D/V-C	2976mm	76W	9200lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V



Dimension

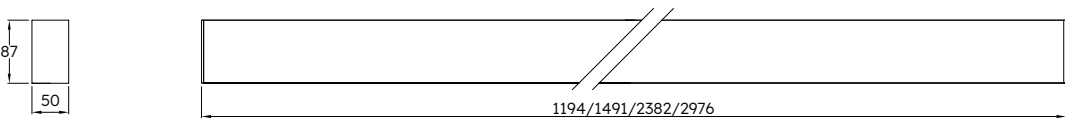



Ultraline-C

General Lighting Fixtures


CE

220-240v
50/60Hz

IP20

DMIMABLE

5 YEARS
WARRAANTY

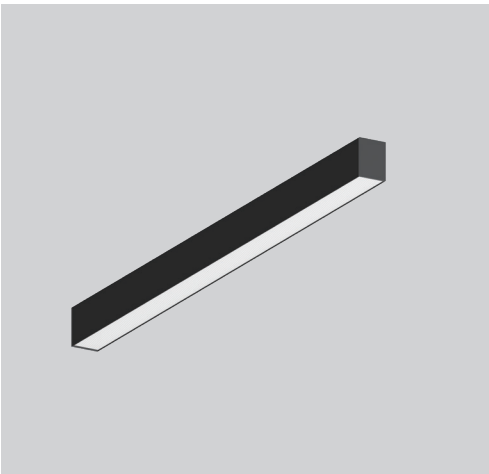

Key Features

- Luminaire housing made of extruded aluminium profile.
- No visible screws, excellent surface powder coated.
- Visual comfort and uniform illumination.
- Lengths could be bespoke according to specification.

Performance Summary

Size	1198mm	1498mm	2390mm	2990mm
Wattage	30W ↓	40W ↓	60W ↓	80W ↓
Lumens	3600lm ↓	4800lm ↓	7200lm ↓	9600lm ↓
CCT	3000K / 4000K / 6000K			
CRI	>80			
Beam Angle	80° ↓			
UGR	<21			
Colors	White / Black / Silver			
Dimming	On/Off / DALI / 1-10V / Casambi Wireless			
Lifetime	50,000Hrs, L80 (B10)			
Material	Aluminum Profile; Microprismatic or Opal Lens			
Warranty	5 years			

Application:

Offices,Commercial,Education,Healthcare, Retailing

Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
UL-DR12030-N/D/V-C	1198mm	30W	3600lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
UL-DR15040-N/D/V-C	1498mm	40W	4800lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
UL-DR24060-N/D/V-C	2390mm	60W	7200lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
UL-DR30080-N/D/V-C	2990mm	80W	9600lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V

Dimension





Visionline-C

General Lighting Fixtures



CE



220-240v
50/60Hz



IP20




DMIMABLE



5 YEARS
WARRAANTY

Key Features

- Luminaire housing made of extruded aluminium profile.
- No visible screws, excellent surface powder coated.
- Visual comfort and uniform illumination.
- Lengths could be bespoke according to specification.

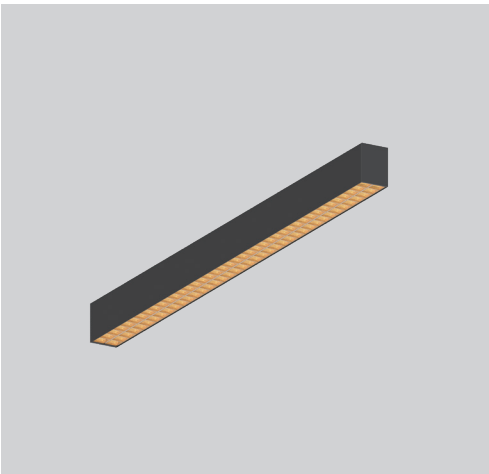

Performance Summary

Size	1126mm	1406mm
Wattage	25W ↓	31W ↓
Lumens	3200lm ↓	4000lm ↓
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	80° ↓	
UGR	<16	
Colors	White / Black	
Dimming	On/Off / DALI / 1-10V / Casambi Wireless	
Lifetime	50,000Hrs, L80 (B10)	
Material	Aluminum Profile; Microprismatic or Opal Lens	
Warranty	5 years	


Application:

Offices,Commercial,Education,Healthcare, Retailing

Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
VL-DR12025-N/D/V-C	1126mm	25W	3200lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
VL-DR15031-N/D/V-C	1406mm	31W	4000lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V

Dimension





Application:

Office, Commercial, Education, Healthcare

Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
NR-DR45030-N/D/V-C	Φ450mm	30W	3300lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
NR-DR60040-N/D/V-C	Φ600mm	40W	5400lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
NR-DR90080-N/D/V-C	Φ900mm	80W	11200lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V

Indirect/Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
NR-ID45040-N/D/V-C	Φ450mm	38W	1300lm ↑ +3100lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
NR-ID60050-N/D/V-C	Φ600mm	50W	2000lm ↑ +4800lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
NR-ID90100-N/D/V-C	Φ900mm	100W	4000lm ↓ +10000lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V

Nora-C

General Lighting Fixtures



CE



220-240v
50/60Hz



IP20



DMIMABLE



5 YEARS
WARRAANTY

Key Features



- Seamless bended aluminum housing with excellent workmanship.
- High quality surface powder coated and support color bespoke.
- Backlit design and Light efficiency up to 130lm/W



Performance Summary

Size	450mm	600mm	900mm
Wattage	30W ↓	40W ↓	80W ↓
Lumens	3300lm ↓	5400lm ↓	11200lm ↓
Wattage	10W ↑ +28W ↓	14W ↑ +36W ↓	28W ↑ +72W ↓
Lumens	1300lm ↑ +3100lm ↓	2000lm ↑ +4800lm ↓	4000lm ↓ +10000lm ↓
CCT	3000K / 4000K / 6000K		
CRI	>80		
Beam Angle	120° ↑ / 90° ↓		
UGR	<19		
Colors	White / Black / Silver		
Dimming	On/Off / DALI / 1-10V / Casambi Wireless		
Lifetime	50,000Hrs, L80 (B10)		
Material	Aluminum frame; PMMA LGP, Microprismatic or Opal Diffuser		
Warranty	5 years		

Dimension





Application:

Office, Commercial, Education, Healthcare, Hospitality

Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
SR-DR35020-N/D/V-C	Φ350mm	20W	2000lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-DR45030-N/D/V-C	Φ450mm	30W	3300lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-DR60040-N/D/V-C	Φ600mm	40W	4800lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-DR90080-N/D/V-C	Φ900mm	80W	10400lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-DR120100-N/D/V-C	Φ1200mm	100W	13500lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V

Indirect/Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
SR-ID35030-N/D/V-C	Φ350mm	30W	1200lm ↑ +2000lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID45045-N/D/V-C	Φ450mm	45W	2000lm ↑ +3300lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID60060-N/D/V-C	Φ600mm	60W	2800lm ↑ +4800lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID90100-N/D/V-C	Φ900mm	100W	4200lm ↓ +9500lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID120120-N/D/V-C	Φ1200mm	120W	5600lm ↑ +10800lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V

Linear Light System Luminaires

Pendant Luminaires

Ceiling Mounted Luminaires

Recessed luminaires

Wall Mounted Luminaires

Free-Standing Luminaires

Desk Mounted Luminaires

Sora-C

General Lighting Fixtures

CE

220-240v
50/60Hz

IP20

DMIMABLE

5 YEARS
WARRAANTY

• Seamless aluminum frame with visual comfort opal/prismatic diffuser.

• Lightguide and diffuser made of non-yellowing plastic (PMMA).


• 5 sizes and versatile installation better for spaces design.

• Driver integrated and easy installation.

Performance Summary

Size	350mm	450mm	600mm	900mm	1200mm
Wattage	20W ↓	30W ↓	40W ↓	80W ↓	100W ↓
Lumens	2000lm ↓	3300lm ↓	4800lm ↓	10400lm ↓	13500lm ↓
Wattage	10W ↑ +20W ↓	15W ↑ +30W ↓	20W ↑ +40W ↓	30W ↑ +70W ↓	40W ↑ + 80W ↓
Lumens	1200lm ↑ +2000lm ↓	2000lm ↑ +3300lm ↓	2800lm ↑ +4800lm ↓	4200lm ↓ +9500lm ↓	5600lm ↑ +10800lm ↓
CCT	3000K / 4000K / 6000K				
CRI	>80				
Beam Angle	120° ↑ / 90° ↓				
UGR	UGR<19				
Colors	White / Black / Silver				
Dimming	On/Off / DALI / 1-10V / Casambi Wireless				
Lifetime	50,000Hrs L80 B10				
Material	Aluminum frame; PMMA LGP, Microprismatic or Opal Diffuser				
Warranty	5 years				

Dimension





Application:

Office, Commercial, Education, Healthcare, Hospitality

Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
SR-ID35030-N/D/V-C1	Φ350mm	20W	2000lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID45045-N/D/V-C1	Φ450mm	30W	3300lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID60060-N/D/V-C1	Φ600mm	40W	4800lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID90100-N/D/V-C1	Φ900mm	80W	10400lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID120120-N/D/V-C1	Φ1200mm	100W	13500lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V

Indirect/Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
SR-ID35030-N/D/V-C1	Φ350mm	30W	1200lm ↑ +2000lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID45045-N/D/V-C1	Φ450mm	45W	2000lm ↑ +3300lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID60060-N/D/V-C1	Φ600mm	60W	2800lm ↑ +4800lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID90100-N/D/V-C1	Φ900mm	100W	4200lm ↓ +9500lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID120120-N/D/V-C1	Φ1200mm	120W	5600lm ↑ +10800lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V

Sora-C1

General Lighting Fixtures

CE

220-240v
50/60Hz

IP20

DMIMABLE

5 YEARS
WARRAANTY

Key Features


- Seamless aluminum frame with visual comfort opal/prismatic diffuser.
- Lightguide and diffuser made of non-yellowing plastic (PMMA).
- 5 sizes and versatile installation better for spaces design.
- Driver integrated and easy installation.



Performance Summary

Size	350mm	450mm	600mm	900mm	1200mm
Wattage	20W ↓	30W ↓	40W ↓	80W ↓	100W ↓
Lumens	2000lm ↓	3300lm ↓	4800lm ↓	10400lm ↓	13500lm ↓
Wattage	10W ↑ +20W ↓	15W ↑ +30W ↓	20W ↑ +40W ↓	30W ↑ +70W ↓	40W ↑ + 80W ↓
Lumens	1200lm ↑ +2000lm ↓	2000lm ↑ +3300lm ↓	2800lm ↑ +4800lm ↓	4200lm ↓ +9500lm ↓	5600lm ↑ +10800lm ↓
CCT	3000K / 4000K / 6000K				
CRI	>80				
Beam Angle	120° ↑ / 90° ↓				
UGR	UGR<19				
Colors	White / Black / Silver				
Dimming	On/Off / DALI / 1-10V / Casambi Wireless				
Lifetime	50,000Hrs L80 B10				
Material	Aluminum frame; PMMA LGP, Microprismatic or Opal Diffuser				
Warranty	5 years				

Dimension





Noma-C

General Lighting Fixtures


CE

220-240v
50/60Hz

IP20

DMIMABLE

5 YEARS
WARRAANTY

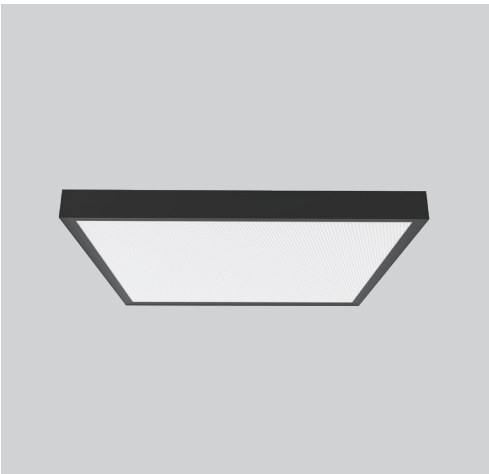

Key Features

- Seamless aluminum frame with visual comfort opal/prismatic diffuser.
- Lightguide and diffuser made of non-yellowing plastic (PMMA).
- 5 sizes and versatile installation better for spaces design.
- Driver integrated and easy installation.

Performance Summary

Size	350mm	450mm	600mm	900mm	1200mm
Wattage	20W ↓	30W ↓	40W ↓	80W ↓	100W ↓
Lumens	2000lm ↓	3300lm ↓	4800lm ↓	10400lm ↓	13500lm ↓
Wattage	10W ↑ +20W ↓	15W ↑ +30W ↓	20W ↑ +40W ↓	30W ↑ +70W ↓	40W ↑ + 80W ↓
Lumens	1200lm ↑ +2000lm ↓	2000lm ↑ +3300lm ↓	2800lm ↑ +4800lm ↓	4200lm ↓ +9500lm ↓	5600lm ↑ +10800lm ↓
CCT	3000K / 4000K / 6000K				
CRI	>80				
Beam Angle	120° ↑ / 90° ↓				
UGR	UGR<19				
Colors	White / Black / Silver				
Dimming	On/Off / DALI / 1-10V / Casambi Wireless				
Lifetime	50,000Hrs L80 B10				
Material	Aluminum frame; PMMA LGP, Microprismatic or Opal Diffuser				
Warranty	5 years				

Application:

Office, Commercial, Education, Healthcare, Hospitality


Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
NM-DR35020-N/D/V-C	Φ350mm	20W	2000lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
NM-DR45030-N/D/V-C	Φ450mm	30W	3300lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
NM-DR60040-N/D/V-C	Φ600mm	40W	4800lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
NM-DR90080-N/D/V-C	Φ900mm	80W	10400lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
NM-DR120100-N/D/V-C	Φ1200mm	100W	13500lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V

Indirect/Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
NM-ID35030-N/D/V-C	Φ350mm	30W	1200lm ↑ +2000lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
NM-ID45045-N/D/V-C	Φ450mm	45W	2000lm ↑ +3300lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
NM-ID60060-N/D/V-C	Φ600mm	60W	2800lm ↑ +4800lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
NM-ID90100-N/D/V-C	Φ900mm	100W	4200lm ↓ +9500lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
NM-ID120120-N/D/V-C	Φ1200mm	120W	5600lm ↑ +10800lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V

Dimension



04

RECESSED LUMINAIRES

TECHNICAL OFFICE
LIGHTING





Slimline-R

General Lighting Fixtures



CE



220-240v
50/60Hz



IP20




DMIMABLE



5 YEARS
WARRAANTY

Key Features

- Luminaire housing made of extruded aluminium profile.
- No visible screws, excellent surface powder coated.
- Visual comfort and uniform illumination.
- Lengths could be bespoke according to specification.

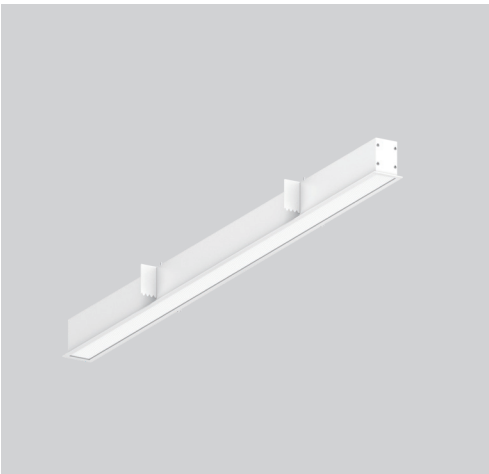

Performance Summary


Size	1196mm	1496mm	2388mm	2988mm
Wattage	30W ↓	38W ↓	60W ↓	76W ↓
Lumens	3600lm ↓	4600lm ↓	7200lm ↓	9200lm ↓
CCT	3000K / 4000K / 6000K			
CRI	>80			
Beam Angle	80° ↓			
UGR	<21			
Colors	White / Black / Silver			
Dimming	On/Off / DALI / 1-10V / Casambi Wireless			
Lifetime	50,000Hrs, L80 (B10)			
Material	Aluminum Profile; Microprismatic or Opal Lens			
Warranty	5 years			

Application:


Office, Commercial, Education, Healthcare, Retailing

Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
SL-DR12030-N/D/V-R	1196mm	30W	3600lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
SL-DR15038-N/D/V-R	1496mm	38W	4600lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
SL-DR24060-N/D/V-R	2388mm	60W	7200lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
SL-DR30076-N/D/V-R	2988mm	76W	9200lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V



Dimension

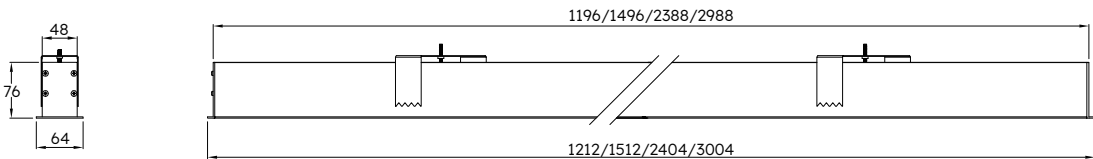




Application:

Office, Commercial, Education, Healthcare, Retailing

Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
FL-DR12030-N/D/V-R	1192mm	30W	3600lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
FL-DR15038-N/D/V-R	1489mm	38W	4600lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
FL-DR24060-N/D/V-R	2380mm	60W	7200lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
FL-DR30076-N/D/V-R	2974mm	76W	9200lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V



Fineline-R

General Lighting Fixtures


CE

220-240v
50/60Hz

IP20

DMIMABLE

5 YEARS
WARRAANTY

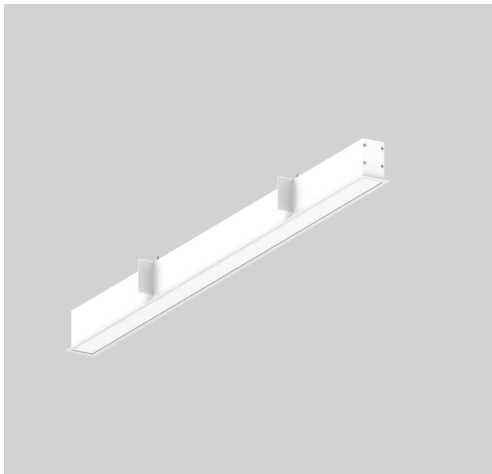


Key Features

- Luminaire housing made of extruded aluminium profile.
- No visible screws, excellent surface powder coated.
- Visual comfort and uniform illumination.
- Lengths could be bespoke according to specification.

Performance Summary

Size	1192mm	1489mm	2380mm	2974mm
Wattage	30W ↓	38W ↓	60W ↓	76W ↓
Lumens	3600lm ↓	4600lm ↓	7200lm ↓	9200lm ↓
CCT	3000K / 4000K / 6000K			
CRI	>80			
Beam Angle	80° ↓			
UGR	<21			
Colors	White / Black / Silver			
Dimming	On/Off / DALI / 1-10V / Casambi Wireless			
Lifetime	50,000Hrs, L80 (B10)			
Material	Aluminum Profile; Microprismatic or Opal Lens			
Warranty	5 years			

Dimension

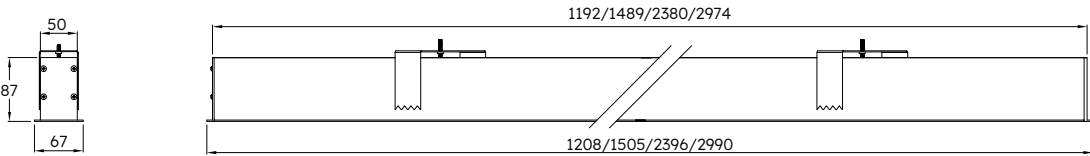




Application:
Offices,Commercial,Education,Healthcare, Retailing

Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
UL-DR12030-N/D/V-R	1196mm	30W	3600lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
UL-DR15040-N/D/V-R	1496mm	40W	4800lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
UL-DR24060-N/D/V-R	2388mm	60W	7200lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
UL-DR30080-N/D/V-R	2988mm	80W	9600lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V



Ultraline-R

General Lighting Fixtures


CE

220-240v
50/60Hz

IP20

DMIMABLE

5 YEARS
WARRAANTY

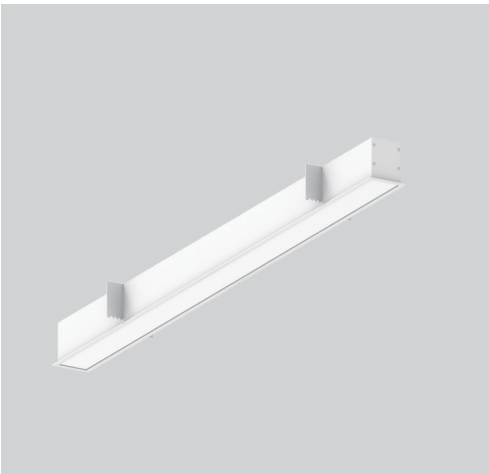


Key Features

- Luminaire housing made of extruded aluminium profile.
- No visible screws, excellent surface powder coated.
- Visual comfort and uniform illumination.
- Lengths could be bespoke according to specification.

Performance Summary

Size	1196mm	1496mm	2388mm	2988mm
Wattage	30W ↓	40W ↓	60W ↓	80W ↓
Lumens	3600lm ↓	4800lm ↓	7200lm ↓	9600lm ↓
CCT	3000K / 4000K / 6000K			
CRI	>80			
Beam Angle	80° ↓			
UGR	<21			
Colors	White / Black / Silver			
Dimming	On/Off / DALI / 1-10V / Casambi Wireless			
Lifetime	50,000Hrs, L80 (B10)			
Material	Aluminum Profile; Microprismatic or Opal Lens			
Warranty	5 years			

Dimension

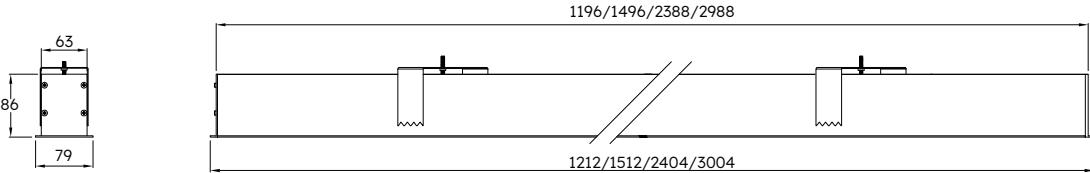




Application:

Office, Commercial, Education, Healthcare, Retailing

Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
SL-DR12030-N/D/V-T	1198mm	30W	3600lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
SL-DR15038-N/D/V-T	1498mm	38W	4600lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
SL-DR24060-N/D/V-T	2390mm	60W	7200lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
SL-DR30076-N/D/V-T	2990mm	76W	9200lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V



Slimline-T

General Lighting Fixtures



CE



220-240v
50/60Hz



IP20




DMIMABLE



5 YEARS
WARRAANTY

Key Features


- Luminaire housing made of extruded aluminium profile.
- No visible screws, excellent surface powder coated.
- Visual comfort and uniform illumination.
- Lengths could be bespoke according to specification.

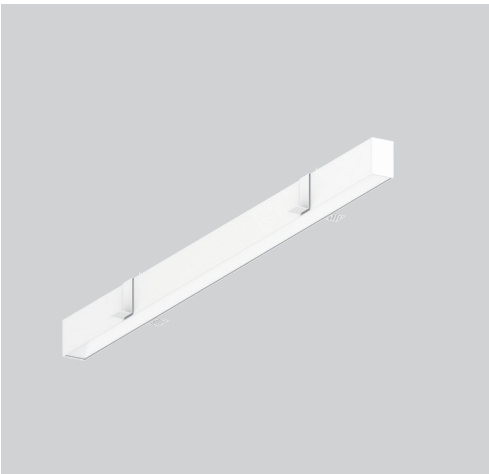

Performance Summary

Size	1198mm	1498mm	2390mm	2990mm
Wattage	30W ↓	38W ↓	60W ↓	76W ↓
Lumens	3600lm ↓	4600lm ↓	7200lm ↓	9200lm ↓
CCT	3000K / 4000K / 6000K			
CRI	>80			
Beam Angle	80° ↓			
UGR	<21			
Colors	White / Black / Silver			
Dimming	On/Off / DALI / 1-10V / Casambi Wireless			
Lifetime	50,000Hrs, L80 (B10)			
Material	Aluminum Profile; Microprismatic or Opal Lens			
Warranty	5 years			

Dimension

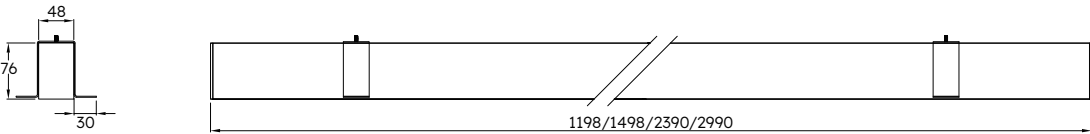




Application:
Office, Commercial, Education, Healthcare, Retailing

Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
FL-DR12030-N/D/V-T	1194mm	30W	3600lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
FL-DR15038-N/D/V-T	1491mm	38W	4600lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
FL-DR24060-N/D/V-T	2382mm	60W	7200lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
FL-DR30076-N/D/V-T	2976mm	76W	9200lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V



Fineline-T

General Lighting Fixtures



CE



220-240v
50/60Hz



IP20




DMIMABLE



5 YEARS
WARRAANTY

Key Features


- Luminaire housing made of extruded aluminium profile.
- No visible screws, excellent surface powder coated.
- Visual comfort and uniform illumination.
- Lengths could be bespoke according to specification.

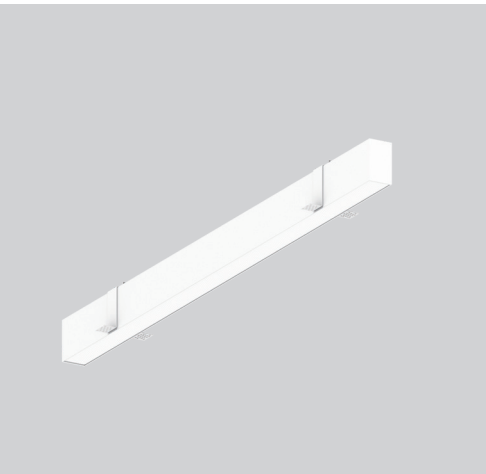

Performance Summary

Size	1194mm	1491mm	2382mm	2976mm
Wattage	30W ↓	38W ↓	60W ↓	76W ↓
Lumens	3600lm ↓	4600lm ↓	7200lm ↓	9200lm ↓
CCT	3000K / 4000K / 6000K			
CRI	>80			
Beam Angle	80° ↓			
UGR	<21			
Colors	White / Black / Silver			
Dimming	On/Off / DALI / 1-10V / Casambi Wireless			
Lifetime	50,000Hrs, L80 (B10)			
Material	Aluminum Profile; Microprismatic or Opal Lens			
Warranty	5 years			

Dimension

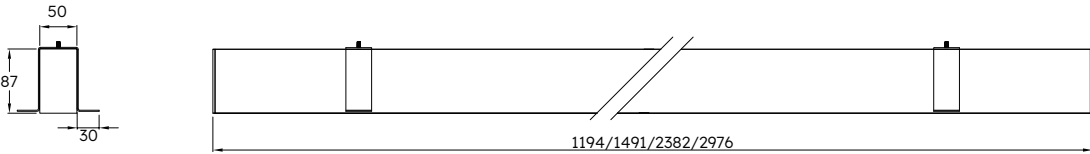



Ultraline-T

General Lighting Fixtures



CE



220-240v
50/60Hz



IP20




DMIMABLE



5 YEARS
WARRAANTY

Key Features

- Luminaire housing made of extruded aluminium profile.
- No visible screws, excellent surface powder coated.
- Visual comfort and uniform illumination.
- Lengths could be bespoke according to specification.

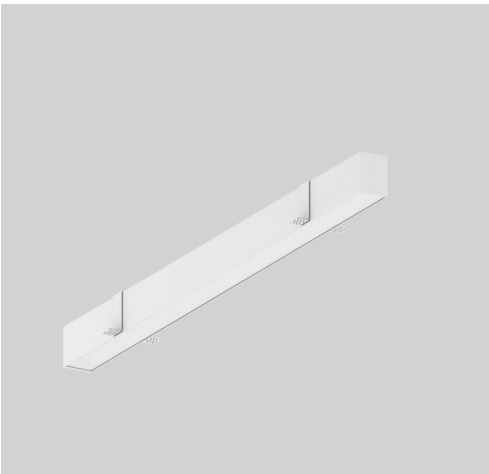

Performance Summary


Size	1198mm	1498mm	2390mm	2990mm
Wattage	30W ↓	40W ↓	60W ↓	80W ↓
Lumens	3600lm ↓	4800lm ↓	7200lm ↓	9600lm ↓
CCT	3000K / 4000K / 6000K			
CRI	>80			
Beam Angle	80° ↓			
UGR	<21			
Colors	White / Black / Silver			
Dimming	On/Off / DALI / 1-10V / Casambi Wireless			
Lifetime	50,000Hrs, L80 (B10)			
Material	Aluminum Profile; Microprismatic or Opal Lens			
Warranty	5 years			

Application:


Offices,Commercial,Education,Healthcare, Retailing

Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
UL-DR12030-N/D/V-T	1198mm	30W	3600lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
UL-DR15040-N/D/V-T	1498mm	40W	4800lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
UL-DR24060-N/D/V-T	2390mm	60W	7200lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
UL-DR30080-N/D/V-T	2990mm	80W	9600lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V



Dimension

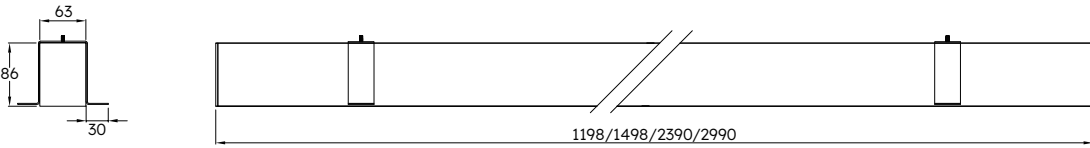




Application:

Office, Commercial, Education, Healthcare

Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
NR-DR450015-N/D/V-R	Φ450mm	15W	2000lm ↓	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
NR-DR450030-N/D/V-R	Φ450mm	30W	4000lm ↓	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
NR-DR600030-N/D/V-R	Φ600mm	30W	4000lm ↓	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
NR-DR600040-N/D/V-R	Φ600mm	40W	5600lm ↓	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V



General Lighting Fixtures

CE

220-240v
50/60Hz

IP20

DMIMABLE

5 YEARS
WARRAANTY

Key Features


- Seamless bended aluminum housing with excellent workmanship.
- High quality surface powder coated and support color bespoke.
- Backlit design and Light efficiency up to 130lm/W



Performance Summary

Size	450mm	450mm	600mm	600mm
Wattage	15W ↓	30W ↓	30W ↓	40W ↓
Lumens	2000lm ↓	4000lm ↓	4000lm ↓	5600lm ↓
CCT	3000K / 4000K / 6000K			
CRI	>80			
Beam Angle	90° ↓			
UGR	<20			
Colors	White / Black			
Dimming	On/Off / DALI / 1-10V / Casambi Wireless			
Lifetime	50,000Hrs, L80 (B10)			
Material	Aluminum frame; PMMA LGP, Microprismatic or Opal Diffuser			
Warranty	5 years			

Dimension

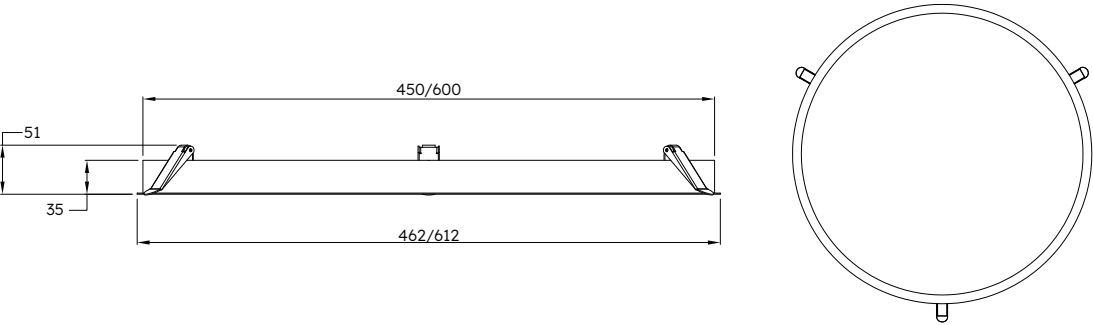




Application:

Office, Commercial, Education, Healthcare

Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
NR-DR450015-N/D/V-T	Φ450mm	15W	2000lm ↓	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
NR-DR450030-N/D/V-T	Φ450mm	30W	4000lm ↓	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
NR-DR600030-N/D/V-T	Φ600mm	30W	4000lm ↓	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
NR-DR600040-N/D/V-T	Φ600mm	40W	5600lm ↓	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V



Nora-T

General Lighting Fixtures

CE

220-240v
50/60Hz

IP20

DMIMABLE

5 YEARS
WARRAANTY

Key Features


- Seamless bended aluminum housing with excellent workmanship.
- High quality surface powder coated and support color bespoke.
- Backlit design and Light efficiency up to 130lm/W



Performance Summary

Size	450mm	450mm	600mm	600mm
Wattage	15W ↓	30W ↓	30W ↓	40W ↓
Lumens	2000lm ↓	4000lm ↓	4000lm ↓	5600lm ↓
CCT	3000K / 4000K / 6000K			
CRI	>80			
Beam Angle	90° ↓			
UGR	<20			
Colors	White / Black			
Dimming	On/Off / DALI / 1-10V / Casambi Wireless			
Lifetime	50,000Hrs, L80 (B10)			
Material	Aluminum frame; PMMA LGP, Microprismatic or Opal Diffuser			
Warranty	5 years			

Dimension

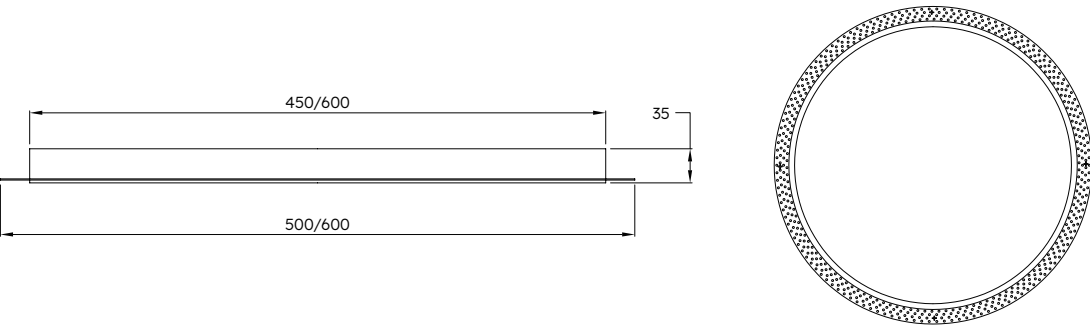



Skyspace-R

General Lighting Fixtures

CE

220-240v
50/60Hz

IP20

DMIMABLE

5 YEARS
WARRAANTY



Key Features

- Curved-Lit solution, morden design for office, commerical.
- No-Yellowing PMMA LGP used.
- Support CCT and Wattage Selectable

Performance Summary


Size	595mmx595mm		595mmx1195mm	
Wattage	30W ↓	40W ↓	40W ↓	50W ↓
Lumens	3500lm ↓	4500lm ↓	4500lm ↓	5800lm ↓
CCT	3000K / 4000K / 5000K			
CRI	>80			
Beam Angle	90° ↓			
UGR	<19			
Colors	White			
Dimming	On/Off / DALI / 1-10V / Casambi Wireless			
Lifetime	50,000Hrs, L80 B10			
Material	Aluminum frame; PMMA Curve LGP			
Warranty	5 years			

Application:


Office, Commercial, Education, Healthcare

Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
SS-DR66030-N/D/V-R	595mm x 595mm	30W	3500lm ↓	>80	3000/4000/5000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SS-DR66040-N/D/V-R	595mm x 595mm	40W	4500lm ↓	>80	3000/4000/5000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SS-DR612040-N/D/V-R	595mm x 1195mm	40W	4500lm ↓	>80	3000/4000/5000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SS-DR612050-N/D/V-R	595mm x 1195mm	50W	5800lm ↓	>80	3000/4000/5000K	90° ↓	N: On/Off / D: DALI / V: 1-10V



Dimension

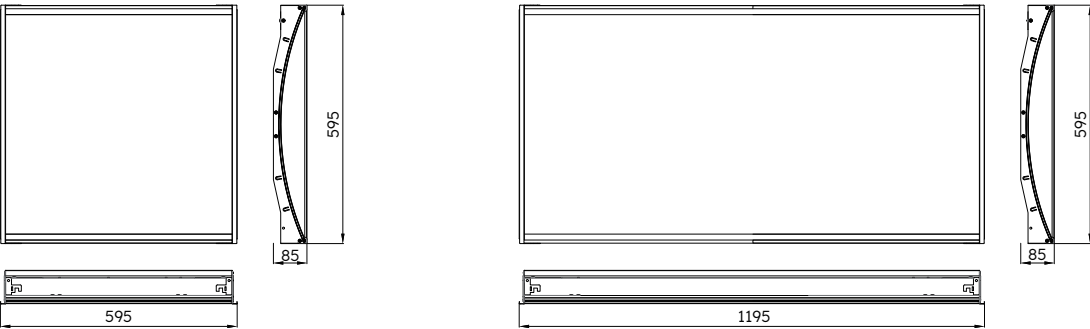




Application:
Office, Commercial, Education, Healthcare

Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
SL-DR66030-N/D/V-R	595mm x 595mm	30W	3500lm ↓	>80	3000/4000/5000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SL-DR66040-N/D/V-R	595mm x 595mm	40W	4500lm ↓	>80	3000/4000/5000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SL-DR612040-N/D/V-R	595mm x 1195mm	40W	4500lm ↓	>80	3000/4000/5000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SL-DR612050-N/D/V-R	595mm x 1195mm	50W	5800lm ↓	>80	3000/4000/5000K	90° ↓	N: On/Off / D: DALI / V: 1-10V



Skyline-R

General Lighting Fixtures

CE

220-240v
50/60Hz

IP20

DMIMABLE

5 YEARS
WARRAANTY

Key Features


- Edge-Lit solution, modern design for office, commerical.
- No-Yellowing PMMA LGP used.
- Support CCT and Wattage Selectable.



Performance Summary

Size	595mmx595mm		595mmx1195mm	
Wattage	30W ↓	40W ↓	40W ↓	50W ↓
Lumens	3500lm ↓	4500lm ↓	4500lm ↓	5800lm ↓
CCT	3000K / 4000K / 5000K			
CRI	>80			
Beam Angle	90° ↓			
UGR	<19			
Colors	White			
Dimming	On/Off / DALI / 1-10V / Casambi Wireless			
Lifetime	50,000Hrs, L80 B10			
Material	Aluminum frame; PMMA Curve LGP			
Warranty	5 years			

Dimension

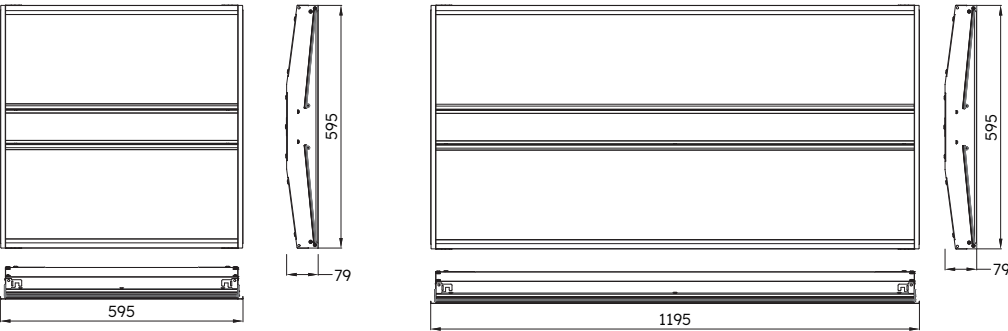




Application:
Office, Commercial, Education, Healthcare

Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
SE-DR66030-N/D/V-R	595mm x 595mm	30W	3500lm ↓	>80	3000/4000/5000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SE-DR66040-N/D/V-R	595mm x 595mm	40W	4500lm ↓	>80	3000/4000/5000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SE-DR612040-N/D/V-R	595mm x 1195mm	40W	4500lm ↓	>80	3000/4000/5000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SE-DR612050-N/D/V-R	595mm x 1195mm	50W	5800lm ↓	>80	3000/4000/5000K	90° ↓	N: On/Off / D: DALI / V: 1-10V



Skyedge-R

General Lighting Fixtures


CE


220-240v
50/60Hz


IP20


DMIMABLE


5 YEARS
WARRAANTY

Key Features


- Edge-Lit solution, modern design for office, commerical.
- No-Yellowing PMMA LGP used.
- Support CCT and Wattage Selectable.



Performance Summary

Size	595mmx595mm		595mmx1195mm	
Wattage	30W ↓	40W ↓	40W ↓	50W ↓
Lumens	3500lm ↓	4500lm ↓	4500lm ↓	5800lm ↓
CCT	3000K / 4000K / 5000K			
CRI	>80			
Beam Angle	90° ↓			
UGR	<25			
Colors	White			
Dimming	On/Off / DALI / 1-10V / Casambi Wireless			
Lifetime	50,000Hrs, L80 B10			
Material	Aluminum frame; PMMA Curve LGP			
Warranty	5 years			

Dimension

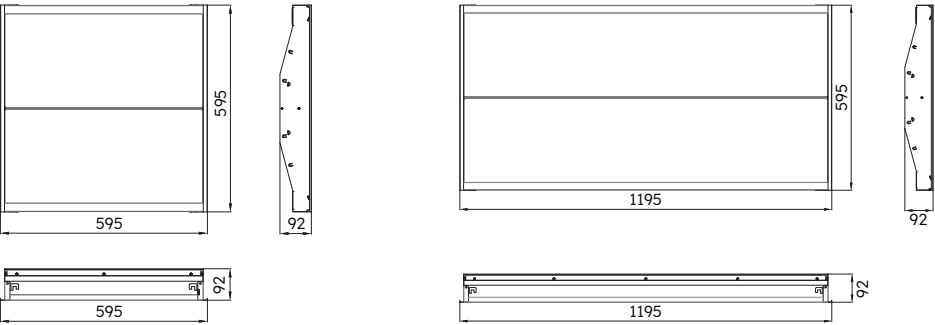

05

WALL MOUNTED
LUMINAIRES

TECHNICAL OFFICE
LIGHTING





Slimline-W

General Lighting Fixtures



CE



220-240v
50/60Hz



IP20




DMIMABLE



5 YEARS
WARRAANTY

Key Features

- Luminaire housing made of extruded aluminium profile.
- No visible screws, excellent surface powder coated.
- Visual comfort and uniform illumination.
- Lengths could be bespoke according to specification.

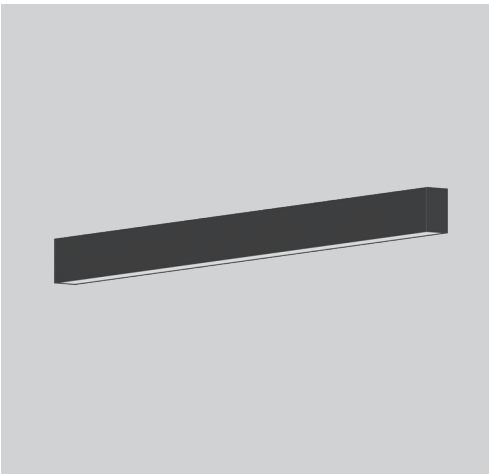

Performance Summary

Size	1198mm	1498mm	2390mm	2990mm
Wattage	30W ↓	38W ↓	60W ↓	76W ↓
Lumens	3600lm ↓	4600lm ↓	7200lm ↓	9200lm ↓
Wattage	14W ↑ + 34W ↓	18W ↑ + 42W ↓	28W ↑ + 68W ↓	36W ↑ + 84W ↓
Lumens	1900lm ↑ + 3800lm ↓	2400lm ↑ + 4800lm ↓	3800lm ↑ + 7600lm ↓	4800lm ↑ + 9600lm ↓
CCT	3000K / 4000K / 6000K			
CRI	>80			
Beam Angle	130° ↑ / 80° ↓			
UGR	<21			
Colors	White / Black / Silver			
Dimming	On/Off / DALI / 1-10V / Casambi Wireless			
Lifetime	50,000Hrs, L80 (B10)			
Material	Aluminum Profile; Microprismatic or Opal Lens			
Warranty	5 years			

Application:


Offices,Commercial,Education,Healthcare, Retailing

Direct Series


Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
SL-DR12030-N/D/V-W	1200mm	30W	3600lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
SL-DR15038-N/D/V-W	1500mm	38W	4600lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
SL-DR24060-N/D/V-W	2390mm	60W	7200lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
SL-DR30076-N/D/V-W	2990mm	76W	9200lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V

Indirect/Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
SL-ID12048-N/D/V-W	1200mm	48W	1900lm ↑ + 3800lm ↓	>80	3000/4000/6000K	130° ↑ / 80° ↓	N: On/Off / D: DALI / V: 1-10V
SL-ID15060-N/D/V-W	1500mm	60W	2400lm ↑ + 4800lm ↓	>80	3000/4000/6000K	130° ↑ / 80° ↓	N: On/Off / D: DALI / V: 1-10V
SL-ID24096-N/D/V-W	2390mm	96W	3800lm ↑ + 7600lm ↓	>80	3000/4000/6000K	130° ↑ / 80° ↓	N: On/Off / D: DALI / V: 1-10V
SL-ID30120-N/D/V-W	2990mm	120W	4800lm ↑ + 9600lm ↓	>80	3000/4000/6000K	130° ↑ / 80° ↓	N: On/Off / D: DALI / V: 1-10V



Dimension

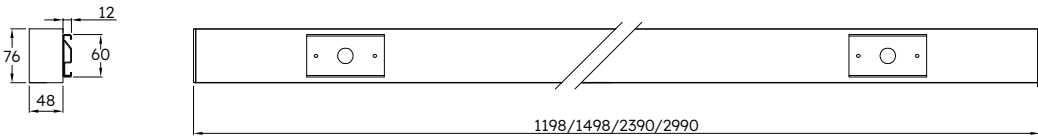



Fineline-W

General Lighting Fixtures



CE



220-240v
50/60Hz



IP20




DMIMABLE



5 YEARS
WARRAANTY

Key Features

- Luminaire housing made of extruded aluminium profile.
- No visible screws, excellent surface powder coated.
- Visual comfort and uniform illumination.
- Lengths could be bespoke according to specification.

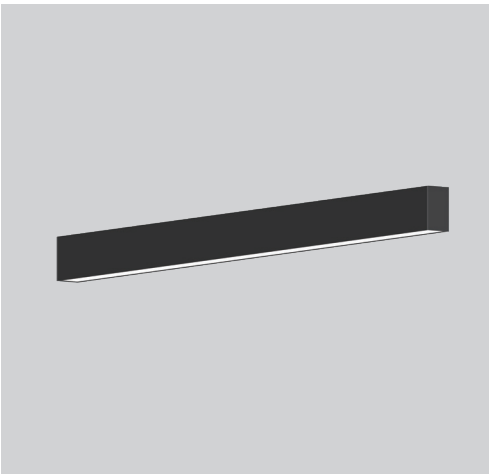

Performance Summary

Size	1194mm	1491mm	2382mm	2976mm
Wattage	30W ↓	38W ↓	60W ↓	76W ↓
Lumens	3600lm ↓	4600lm ↓	7200lm ↓	9200lm ↓
Wattage	14W ↑ + 34W ↓	18W ↑ + 42W ↓	28W ↑ + 68W ↓	36W ↑ + 84W ↓
Lumens	1900lm ↑ + 3800lm ↓	2400lm ↑ + 4800lm ↓	3800lm ↑ + 7600lm ↓	4800lm ↑ + 9600lm ↓
CCT	3000K / 4000K / 6000K			
CRI	>80			
Beam Angle	130° ↑ / 80° ↓			
UGR	<21			
Colors	White / Black / Silver			
Dimming	On/Off / DALI / 1-10V / Casambi Wireless			
Lifetime	50,000Hrs, L80 (B10)			
Material	Aluminum Profile; Microprismatic or Opal Lens			
Warranty	5 years			

Application:


Office, Commercial, Education, Healthcare, Retailing

Direct Series


Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
FL-DR12030-N/D/V-W	1194mm	30W	3600lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
FL-DR15038-N/D/V-W	1491mm	38W	4600lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
FL-DR24060-N/D/V-W	2382mm	60W	7200lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
FL-DR30076-N/D/V-W	2976mm	76W	9200lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V

Indirect/Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
FL-ID12048-N/D/V-W	1194mm	48W	1900lm ↑ + 3800lm ↓	>80	3000/4000/6000K	130° ↑ / 80° ↓	N: On/Off / D: DALI / V: 1-10V
FL-ID15060-N/D/V-W	1491mm	60W	2400lm ↑ + 4800lm ↓	>80	3000/4000/6000K	130° ↑ / 80° ↓	N: On/Off / D: DALI / V: 1-10V
FL-ID24096-N/D/V-W	2382mm	96W	3800lm ↑ + 7600lm ↓	>80	3000/4000/6000K	130° ↑ / 80° ↓	N: On/Off / D: DALI / V: 1-10V
FL-ID30120-N/D/V-W	2976mm	120W	4800lm ↑ + 9600lm ↓	>80	3000/4000/6000K	130° ↑ / 80° ↓	N: On/Off / D: DALI / V: 1-10V



Dimension

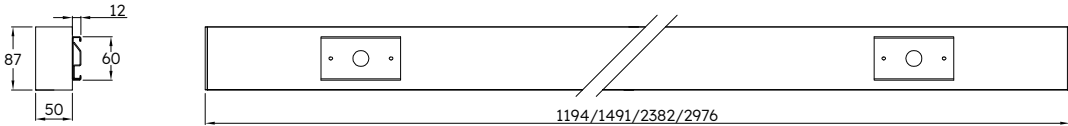



Application:


Offices,Commercial,Education,Healthcare, Retailing

Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
UL-DR12030-N/D/V-W	1198mm	30W	3600lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
UL-DR15040-N/D/V-W	1498mm	40W	4800lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
UL-DR24060-N/D/V-W	2390mm	60W	7200lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V
UL-DR30080-N/D/V-W	2990mm	80W	9600lm ↓	>80	3000/4000/6000K	80° ↓	N: On/Off / D: DALI / V: 1-10V

Indirect/Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
UL-ID12050-N/D/V-W	1198mm	50W	2200lm ↑ + 4000lm ↓	>80	3000/4000/6000K	130° ↑ / 80° ↓	N: On/Off / D: DALI / V: 1-10V
UL-ID15062-N/D/V-W	1498mm	62W	2750lm ↑ + 5000lm ↓	>80	3000/4000/6000K	130° ↑ / 80° ↓	N: On/Off / D: DALI / V: 1-10V
UL-ID24100-N/D/V-W	2390mm	100W	4400lm ↑ + 8000lm ↓	>80	3000/4000/6000K	130° ↑ / 80° ↓	N: On/Off / D: DALI / V: 1-10V
UL-ID30124-N/D/V-W	2990mm	124W	5500lm ↑ + 10000lm ↓	>80	3000/4000/6000K	130° ↑ / 80° ↓	N: On/Off / D: DALI / V: 1-10V



Ultraline-W

General Lighting Fixtures

CE

220-240v
50/60Hz

IP20

DMIMABLE

5 YEARS
WARRAANTY




Key Features

- Luminaire housing made of extruded aluminium profile.
- No visible screws, excellent surface powder coated.
- Visual comfort and uniform illumination.
- Lengths could be bespoke according to specification.

Performance Summary

Size	1198mm	1498mm	2390mm	2990mm
Wattage	30W ↓	40W ↓	60W ↓	80W ↓
Lumens	3600lm ↓	4800lm ↓	7200lm ↓	9600lm ↓
Wattage	16W ↑ + 34W ↓	20W ↑ + 42W ↓	32W ↑ + 68W ↓	40W ↑ + 84W ↓
Lumens	2200lm ↑ + 4000lm ↓	2750lm ↑ + 5000lm ↓	4400lm ↑ + 8000lm ↓	5500lm ↑ + 10000lm ↓
CCT	3000K / 4000K / 6000K			
CRI	>80			
Beam Angle	130° ↑ / 80° ↓			
UGR	<21			
Colors	White / Black / Silver			
Dimming	On/Off / DALI / 1-10V / Casambi Wireless			
Lifetime	50,000Hrs, L80 (B10)			
Material	Aluminum Profile; Microprismatic or Opal Lens			
Warranty	5 years			

Dimension

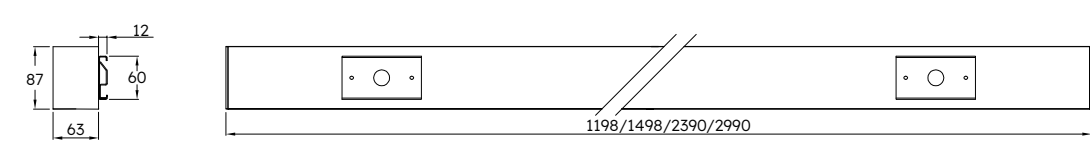



Sora-W

General Lighting Fixtures



CE



220-240v
50/60Hz



IP20



DMIMABLE



5 YEARS
WARRAANTY

Key Features


- Seamless aluminum frame with visual comfort opal/prismatic diffuser.
- Lightguide and diffuser made of non-yellowing plastic (PMMA).
- 5 sizes and versatile installation better for spaces design.
- Driver integrated and easy installation.



Performance Summary

Size	350mm	450mm	600mm	900mm	1200mm
Wattage	20W ↓	30W ↓	40W ↓	80W ↓	100W ↓
Lumens	2000lm ↓	3300lm ↓	4800lm ↓	10400lm ↓	13500lm ↓
Wattage	10W ↑ +20W ↓	15W ↑ +30W ↓	20W ↑ +40W ↓	30W ↑ +70W ↓	40W ↑ + 80W ↓
Lumens	1200lm ↑ +2000lm ↓	2000lm ↑ +3300lm ↓	2800lm ↑ +4800lm ↓	4200lm ↓ +9500lm ↓	5600lm ↑ +10800lm ↓
CCT	3000K / 4000K / 6000K				
CRI	>80				
Beam Angle	120° ↑ / 90° ↓				
UGR	UGR<19				
Colors	White / Black / Silver				
Dimming	On/Off / DALI / 1-10V / Casambi Wireless				
Lifetime	50,000Hrs L80 B10				
Material	Aluminum frame; PMMA LGP, Microprismatic or Opal Diffuser				
Warranty	5 years				

Dimension



Application:

Office, Commercial, Education, Healthcare, Hospitality

Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
SR-DR35020-N/D/V-W	Φ350mm	20W	2000lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-DR45030-N/D/V-W	Φ450mm	30W	3300lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-DR60040-N/D/V-W	Φ600mm	40W	4800lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-DR90080-N/D/V-W	Φ900mm	80W	10400lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-DR120100-N/D/V-W	Φ1200mm	100W	13500lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V

Indirect/Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
SR-ID35030-N/D/V-W	Φ350mm	30W	1200lm ↑ +2000lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID45045-N/D/V-W	Φ450mm	45W	2000lm ↑ +3300lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID60060-N/D/V-W	Φ600mm	60W	2800lm ↑ +4800lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID90100-N/D/V-W	Φ900mm	100W	4200lm ↓ +9500lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID120120-N/D/V-W	Φ1200mm	120W	5600lm ↑ +10800lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V

Linear Light System Luminaires

Pendant Luminaires

Ceiling Mounted Luminaires

Recessed luminaires

Wall Mounted Luminaires

Free-Standing Luminaires

Desk Mounted Luminaires



Application:

Office, Commercial, Education, Healthcare, Hospitality

Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
SR-DR35020-N/D/V-W1	Φ350mm	20W	2000lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-DR45030-N/D/V-W1	Φ450mm	30W	3300lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-DR60040-N/D/V-W1	Φ600mm	40W	4800lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-DR90080-N/D/V-W1	Φ900mm	80W	10400lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-DR120100-N/D/V-W1	Φ1200mm	100W	13500lm	>80	3000/4000/6000K	90° ↓	N: On/Off / D: DALI / V: 1-10V

Indirect/Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
SR-ID35030-N/D/V-W1	Φ350mm	30W	1200lm ↑ +2000lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID45045-N/D/V-W1	Φ450mm	45W	2000lm ↑ +3300lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID60060-N/D/V-W1	Φ600mm	60W	2800lm ↑ +4800lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID90100-N/D/V-W1	Φ900mm	100W	4200lm ↓ +9500lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V
SR-ID120120-N/D/V-W1	Φ1200mm	120W	5600lm ↑ +10800lm ↓	>80	3000/4000/6000K	120° ↑ / 90° ↓	N: On/Off / D: DALI / V: 1-10V

Sora-W1

General Lighting Fixtures



CE



220-240v
50/60Hz



IP20




DMIMABLE



5 YEARS
WARRAANTY

Key Features


- Seamless aluminum frame with visual comfort opal/prismatic diffuser.
- Lightguide and diffuser made of non-yellowing plastic (PMMA).
- 5 sizes and versatile installation better for spaces design.
- Driver integrated and easy installation.

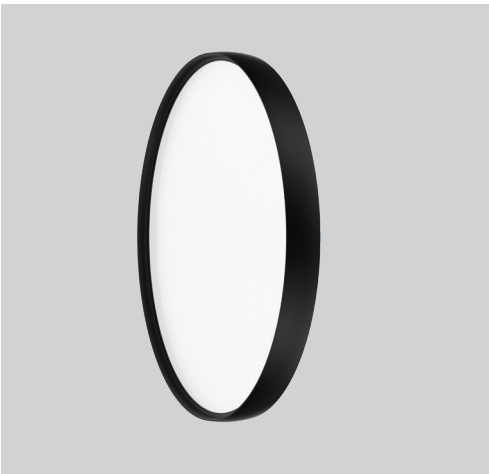

Performance Summary

Size	350mm	450mm	600mm	900mm	1200mm
Wattage	20W ↓	30W ↓	40W ↓	80W ↓	100W ↓
Lumens	2000lm ↓	3300lm ↓	4800lm ↓	10400lm ↓	13500lm ↓
Wattage	10W ↑ +20W ↓	15W ↑ +30W ↓	20W ↑ +40W ↓	30W ↑ +70W ↓	40W ↑ + 80W ↓
Lumens	1200lm ↑ +2000lm ↓	2000lm ↑ +3300lm ↓	2800lm ↑ +4800lm ↓	4200lm ↓ +9500lm ↓	5600lm ↑ +10800lm ↓
CCT	3000K / 4000K / 6000K				
CRI	>80				
Beam Angle	120° ↑ / 90° ↓				
UGR	UGR<19				
Colors	White / Black / Silver				
Dimming	On/Off / DALI / 1-10V / Casambi Wireless				
Lifetime	50,000Hrs L80 B10				
Material	Aluminum frame; PMMA LGP, Microprismatic or Opal Diffuser				
Warranty	5 years				

Dimension





Overbed-W

General Lighting Fixtures



CE



220-240v
50/60Hz



IP20



DMIMABLE



5 YEARS
WARRAANTY

Key Features

- Three CCT selections available -3000K, 4000K,or 5000K
- Bi-directional lighting reading, task, and ambient light levels for patient
- 4-Way pull chain operation allows for direct, indirect, and combined.
- Switchable indicator nightlight



Performance Summary



Size	900mm	1200mm
Wattage	30W ↓	40W ↓
Lumens	3590m ↓	4697lm ↓
Wattage	15W ↑ + 30W ↓	20W ↑ + 40W ↓
Lumens	1794lm ↑ +3590lm ↓	2348lm ↑ + 4697lm ↓
CCT	3000K / 4000K /5000K	
CRI	>80	
Beam Angle	110° ↑ / 110° ↓	
UGR	<21	
Colors	White / Black	
Dimming	On/Off / 1-10V	
Lifetime	50,000Hrs, L80 (B10)	
Material	Rugged, cold-rolled steel coated polyester, painted after fabrication. Opal Lens	
Warranty	5 years	

Application:

In patient rooms at hospitals, clinics, nursing care facilities

Indirect/Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
OB-ID09045-N/V-W	900mm	15W ↑ + 30W ↓	1794lm ↑ +3590lm ↓	>80	3000/4000/5000K	110° ↑ / 110° ↓	N: On/Off / V: 1-10V
OB-ID12060-N/V-W	1200mm	20W ↑ + 40W ↓	2348lm ↑ + 4697lm ↓	>80	3000/4000/5000K	110° ↑ / 110° ↓	N: On/Off / V: 1-10V

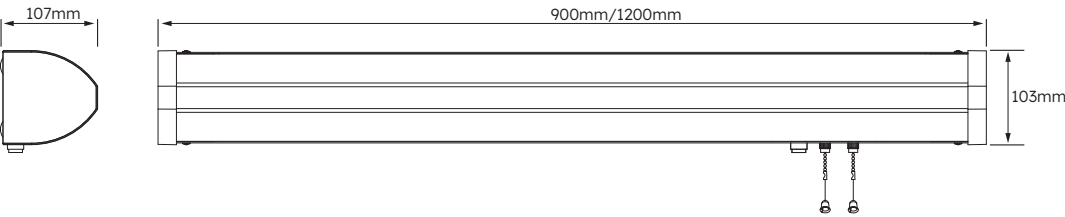

06

FREE-STANDING LUMINAIRES

TECHNICAL OFFICE
LIGHTING






Application:

Office, Commercial, Education, Healthcare

Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
LS-ID11060-B-F	1100mm x 40mm x 40mm	60W	5000lm ↑ +2500lm ↓	>80	3000/4000K	130° ↑ / Asymetric 75° ↓	Touch Panel Control
LS-ID11060-C-F	1100mm x 40mm x 40mm	60W	5000lm ↑ +2500lm ↓	>80	3000-6500K	130° ↑ / Asymetric 75° ↓	Touch Panel Control



Lucas-F

General Lighting Fixtures

CE

220-240v
50/60Hz

IP20

DMIMABLE

5 YEARS
WARRAANTY




Key Features

- Optimal glare control UGR<16
- High efficacy more than 125LM/W
- Fast installation and easy maintenance

Performance Summary

Size	Lamp Head: 1100mm x 40mm x 40mm, Base: 500mm x 360mm
Wattage	60W
Lumens	5000lm ↑ +2500lm ↓
CCT	3000K/ 4000K / 3000K-6500K
CRI	>90
Beam Angle	130° ↑ / Asymetric 75° ↓
UGR	<16
Colors	White / Black / Silver
Dimming	Touch Panel Control
Lifetime	50,000Hrs, L80 B10
Material	Aluminum frame; PMMA Lens
Warranty	5 years

Dimension

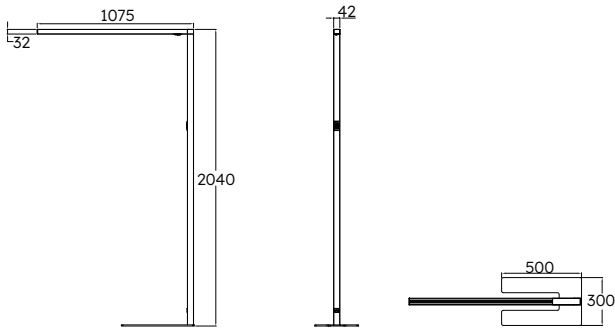

07

DESK MOUNTED LUMINAIRES

TECHNICAL OFFICE
LIGHTING






Application:
Office, Commercial, Education, Healthcare

Direct Series

Code	Size	Wattage	Lumens	CRI	CCT	Beam	Dimming
LS-ID11060-B-D	1100mm x 40mm x 40mm	60W	5000lm ↑ +2500lm ↓	>80	3000/4000K	130° ↑ / Asymetric 75° ↓	Touch Panel Control
LS-ID11060-C-D	1100mm x 40mm x 40mm	60W	5000lm ↑ +2500lm ↓	>80	3000-6500K	130° ↑ / Asymetric 75° ↓	Touch Panel Control



Lucas-D

General Lighting Fixtures

CE

220-240v
50/60Hz

IP20

DMIMABLE

5 YEARS
WARRAANTY

Key Features


- High efficacy more than 125LM/W
- Fast installation and easy maintenance



Performance Summary

Size	Lamp Head: 1100mm x 40mm x 40mm
Wattage	60W
Lumens	5000lm ↑ +2500lm ↓
CCT	3000K/ 4000K / 3000K-6500K
CRI	>90
Beam Angle	130° ↑ / Asymetric 75° ↓
UGR	<16
Colors	White / Black / Silver
Dimming	Touch Panel Control
Lifetime	50,000Hrs, L80 B10
Material	Aluminum frame; PMMA Lens
Warranty	5 years

Dimension

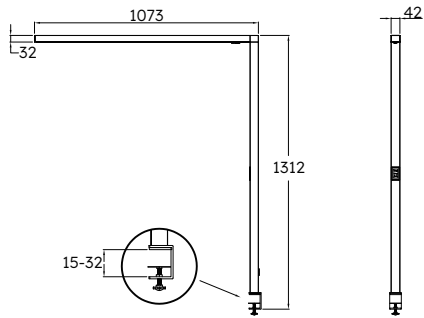

Our Service

Customized Solutions

We design tailored lighting solutions to meet unique office needs.

Fast & Reliable Delivery

We ensure quick response and high-quality product delivery.

Strategic Collaboration

We partner to plan marketing and growth strategies for mutual success.

