



SITE WEB

SALES SHEETS *2026*



QUOTES

CANATECH

S O L U T I O N S



SITE WEB










QUOTES

Unit 603A, 6/F Tower 1, Admiralty Centre · 18 Harcourt Road, Hong Kong

+1 844 734 6533 · canatechsolutions.com

Lighting Solutions 13 Product Families, 300 + Products

TRACK LIGHTING	LOW VOLTAGE LINEAR SOLUTIONS	RINGS	BACKLIT MIRROR	STEP LIGHT	DOWNLIGHTS	MONOPOINT	SUSPENSIONS	NEON FLEX	DRIVERS CONTROLLERS
									
ALINA	OLIVIA ROBERTHA CONNOR DOBY ROCCO JAXSON POLA VENGA VENGA SLIM PALAZO MASTER ARKALUX	CERCIO	KYOKO	MYLA	DESFOLI	BOGOTA	BORIS LIGHT DROP ZOOMBAR	ZIA 97+ PRODUCTS	25+ DRIVERS 5 CONTROLLERS
									
EROS									

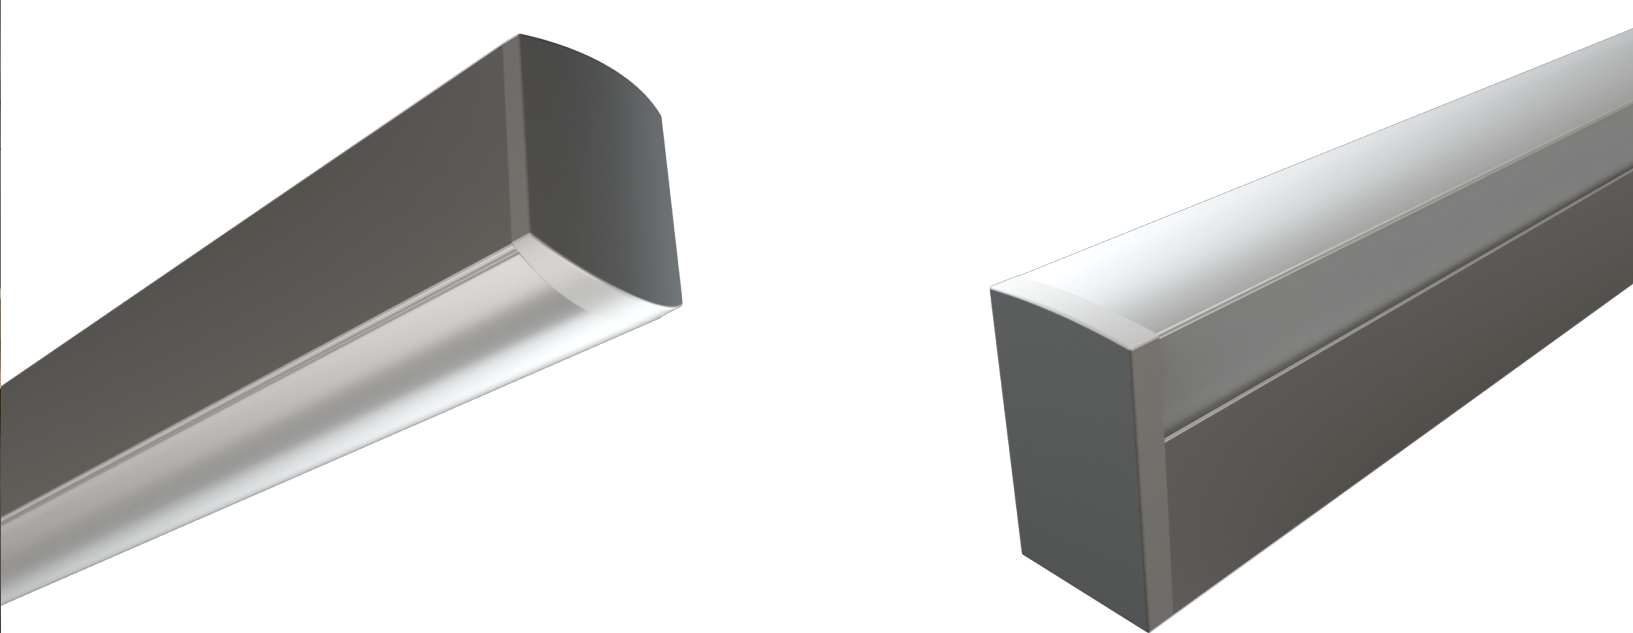

ROCCO

Key features

- Up to 1400lm/ft
- Up to 160lm/W
- Up to 95 CRI
- Tunable white
- Dim to warm
- RGBW

Application

- Retail
- Office
- Commercial
- Cove Lighting
- Entrance Hall

Installation type

- Suspended
- Surface Mounted
(Hidden Bracket)
- Adhesive Tape (3M)
- Magnetic



Features to Benefits


- Dot and pixelation free
- Invisible mounting brackets
- Fully assembly or field cuttable
- Customizable patterns

- Light uniformity and glare control
- Sleek and seamless installation
- Fast onsite installation flexibility
- Endless creativity

Learn more about Rocco 



ROCCO

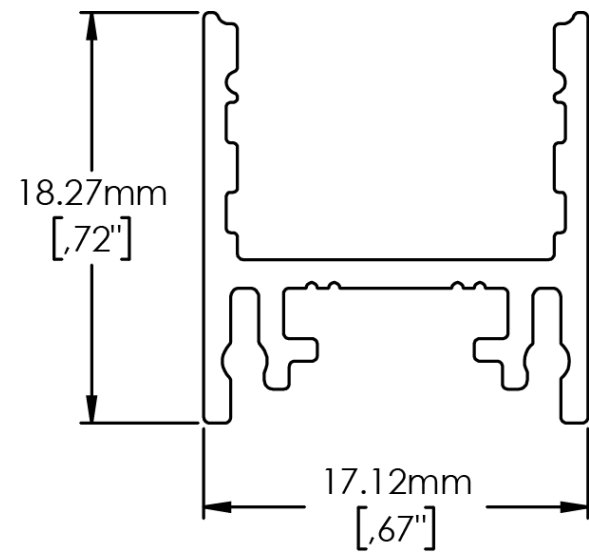

Other Features



IP20
RATED

IP44
RATED

IP67
RATED







Can be used
to comply with
2019 Title24
Part 6
JA8
High efficacy LED light
source requirements

LM79
LM80




CANATECH
SOLUTIONS

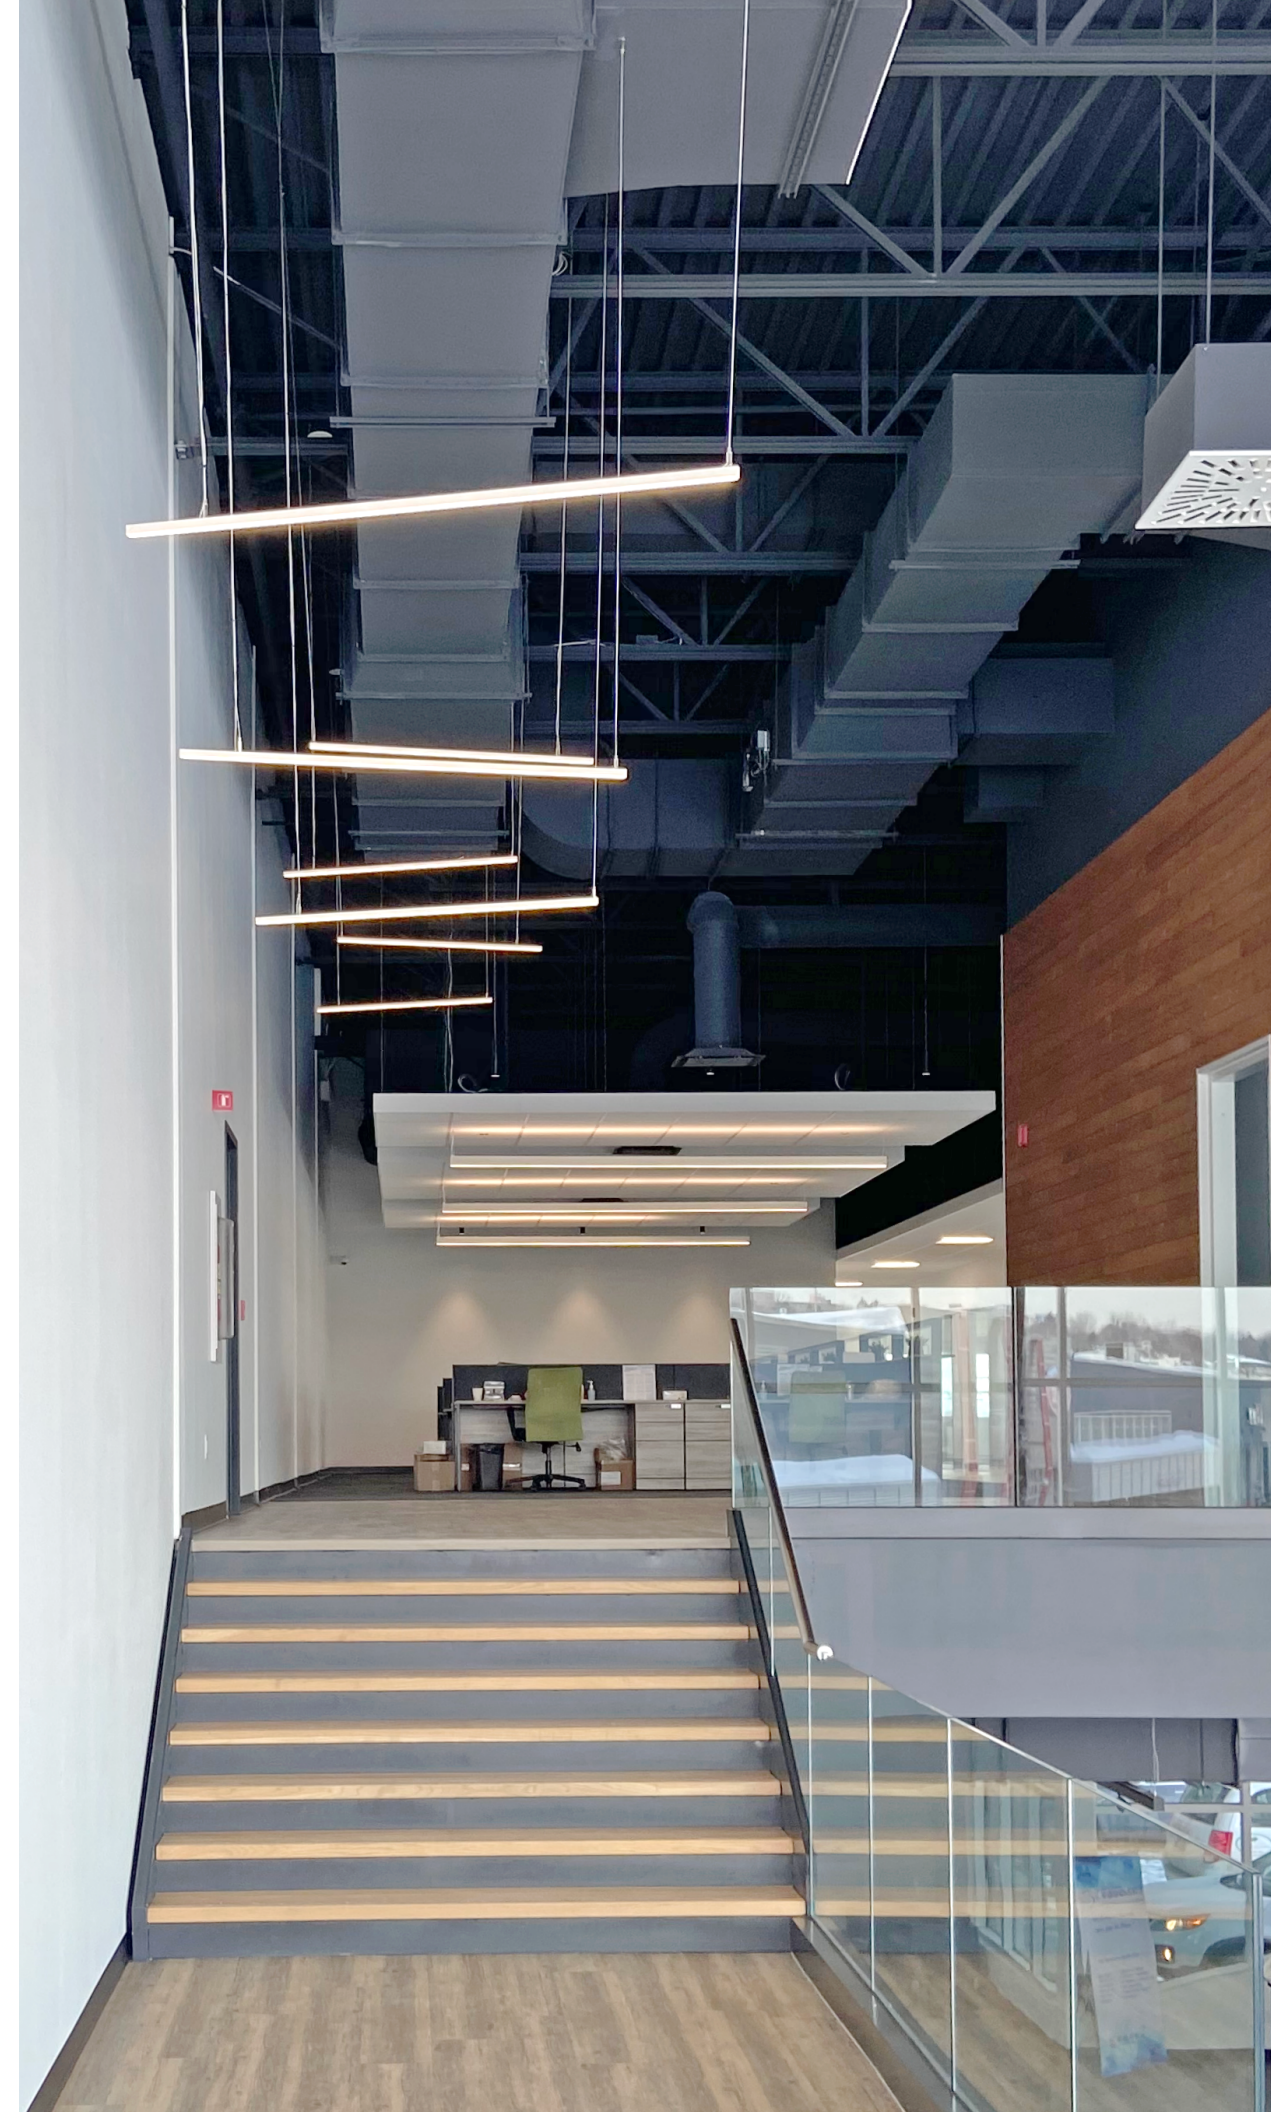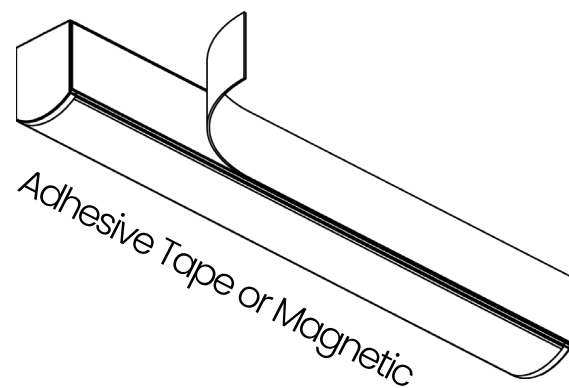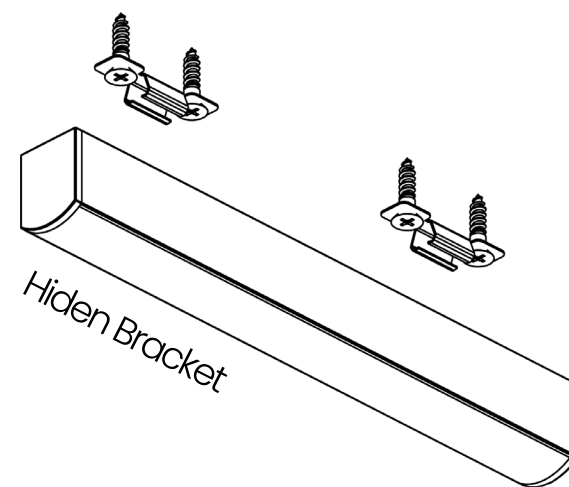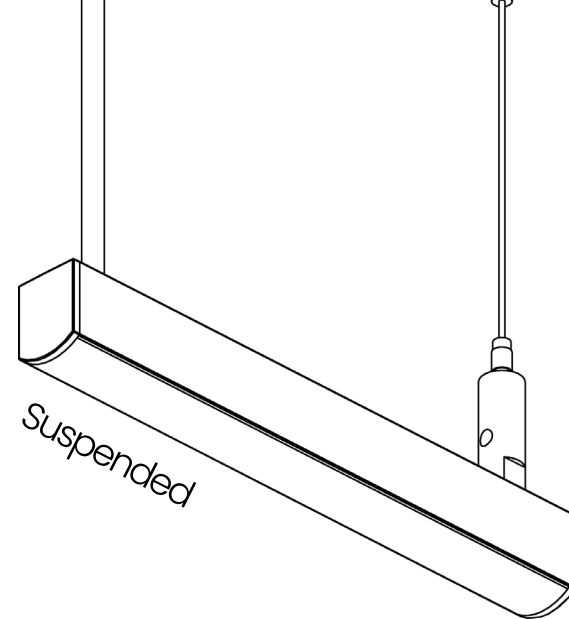



DOBY

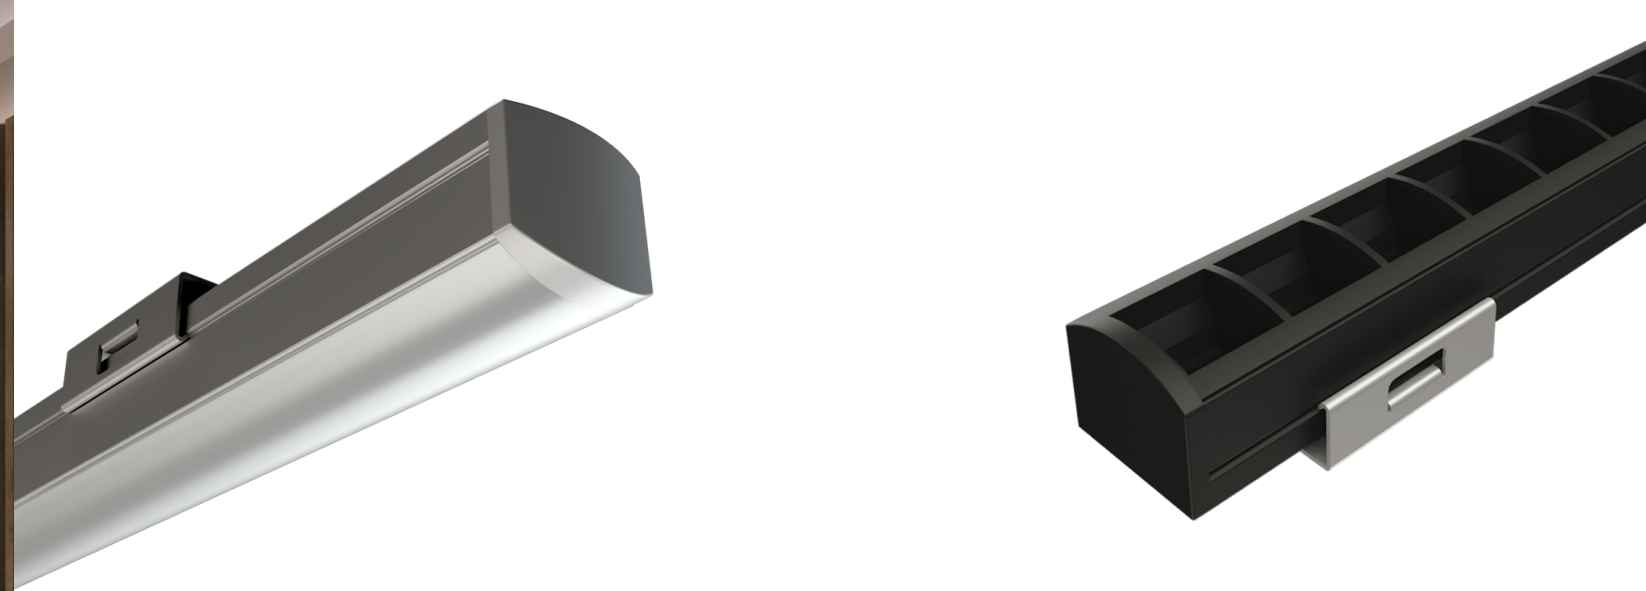

DOBY

Key features

Up to 1400lm/ft
Up to 160lm/W
Up to 95 CRI
Tunable white
Dim to warm
RGBW
Wet location

Application

Boutique
Undercabinet
Commercial display
Outdoor cornice
Entrance hall

Installation type

Surface Mounted
(180° Adjustable Bracket)
(Straight Fixed Bracket)
Adhesive Tape (3M)
Magnetic

Features to Benefits

Dot and pixelation free
Adjustable mounting brackets
Fully assembly or field cuttable
Minimaliste size





Light uniformity and glare control
Precise and targeted highlighting
Fast onsite installation flexibility
Versatile and flexible for restrained spaces

Learn more about Doby 



CANATECH
S O L U T I O N S

DOBY

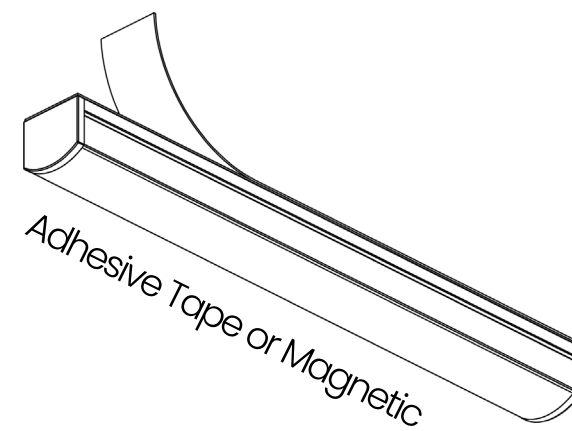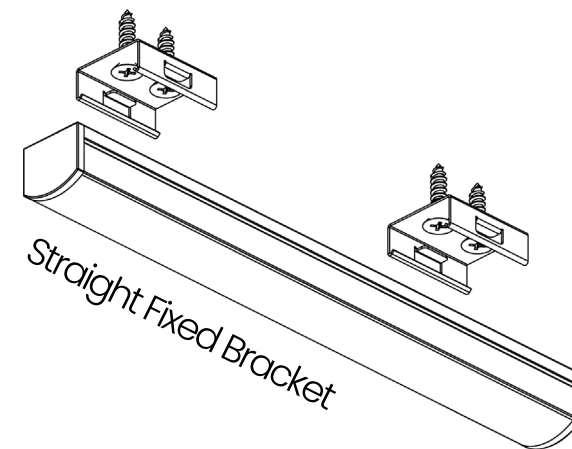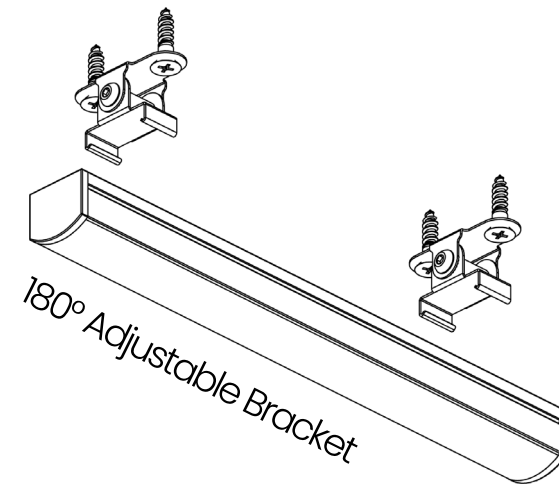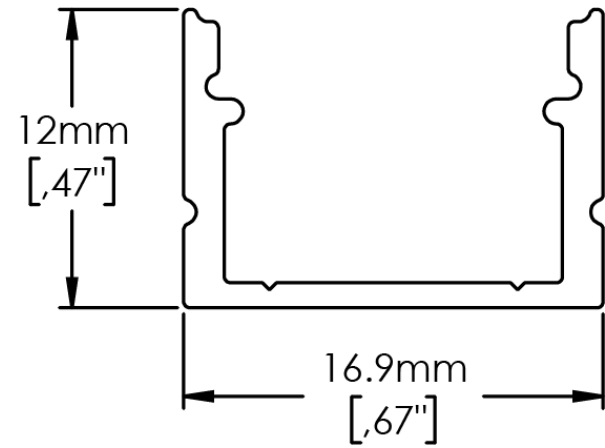

Other Features



IP20
RATED

IP44
RATED

IP67
RATED



Can be used
to comply with
2019 Title24
Part 6
JA8
High efficacy LED light
source requirements

LM79
LM80

2 Step
MacAdam
Ellipse

CANATECH
SOLUTIONS





JAXSON

Key features

- Up to 1400lm/ft
- Up to 160lm/W
- Up to 95 CRI
- Tunable white
- Dim to warm
- RGBW
- Wet location

Application

- Corridor
- Staircase
- Cove Lighting
- Office Spaces

Installation type

- Recessed
(Spring Bracket)

Features to Benefits


- Multiple optics offers
- Dot and pixelation free
- Tooless field installation
- Long continuous run

- Precise and targeted highlighting
- Light uniformity, comfort and glare control
- Fast onsite installation
- Seamless lighting continuity

Learn more about Jaxson 



JAXSON

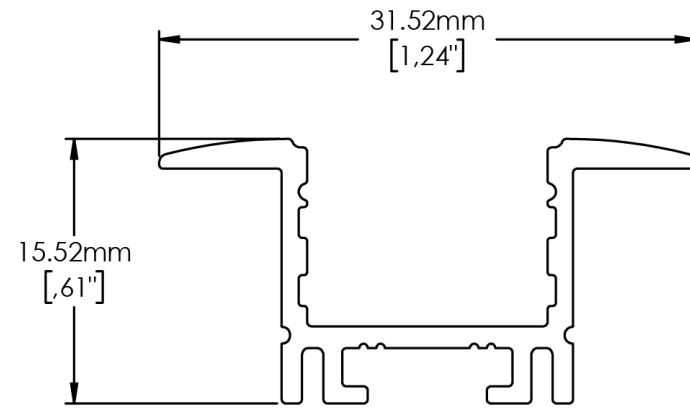

Other Features



IP20
RATED

IP44
RATED


IP67
RATED



Can be used
to comply with
2019 Title24
Part 6
JA8
High efficacy LED light
source requirements


LM79
LM80

2 Step
MacAdam
Ellipse

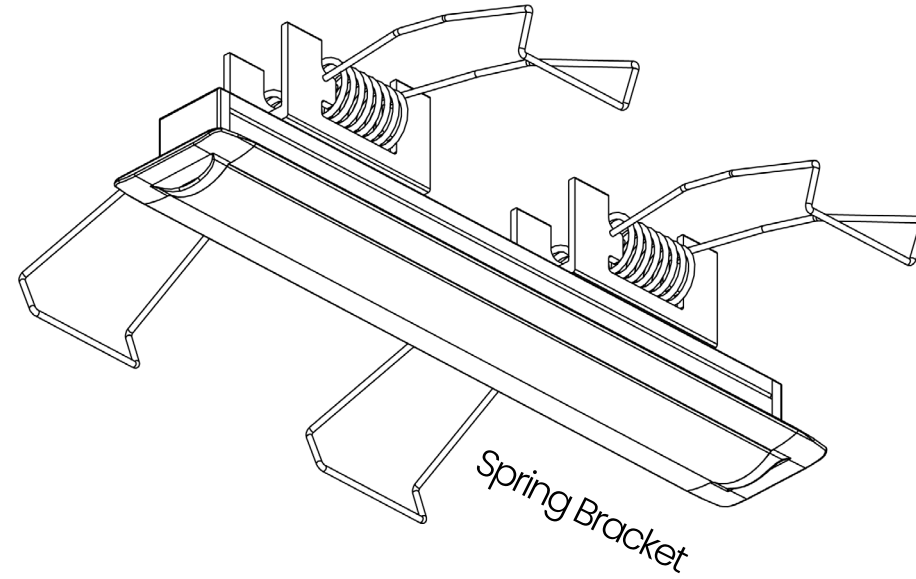

CANATECH
SOLUTIONS



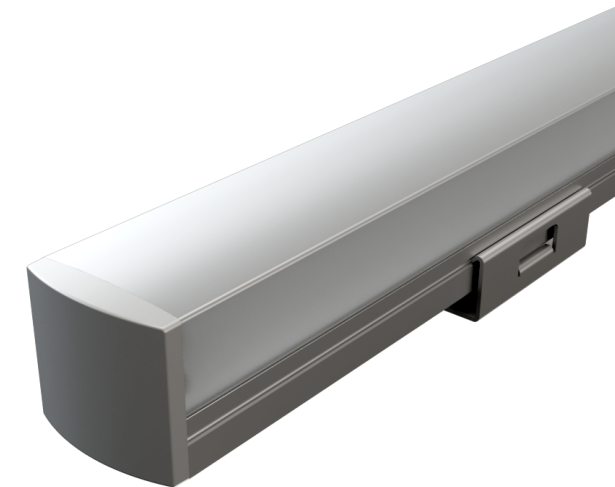

OLIVIA

Key features

Up to 1400lm/ft
Up to 160lm/W
Up to 95 CRI
Dim to warm
RGBW

Application

Cove Lighting
Entrance Hall
Hospitality
Restaurant

Installation type

Surface Mounted
(180° Adjustable Bracket)
(Straight Fixed Bracket)
Adhesive Tape (3M)
Magnetic

Features to Benefits

Dot and pixelation free
Long continuous run
Adjustable mounting brackets
Dim to warm


Light uniformity, comfort and glare control
Seamless lighting continuity
Precise and targeted highlighting
Functional to cozy lighting

Learn more about Olivia 



CANATECH
SOLUTIONS

OLVIA

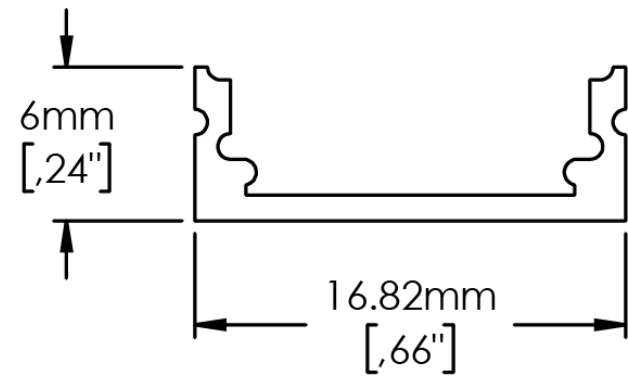

Other Features



IP20
RATED

IP44
RATED






Can be used
to comply with
2019 Title24
Part 6
JA8
High efficacy LED light
source requirements

LM79
LM80

2 Step
MacAdam
Ellipse

CANATECH
SOLUTIONS

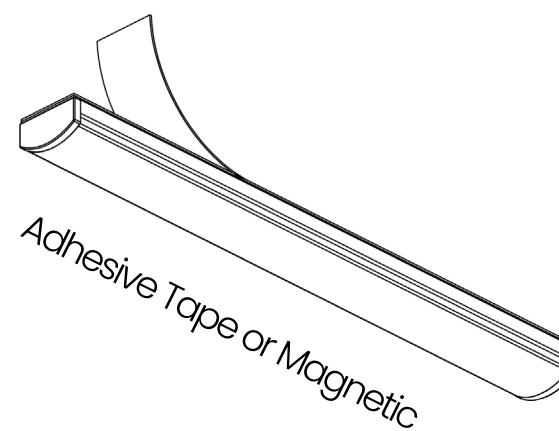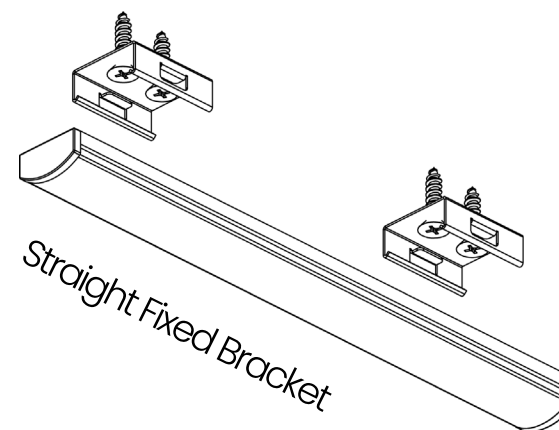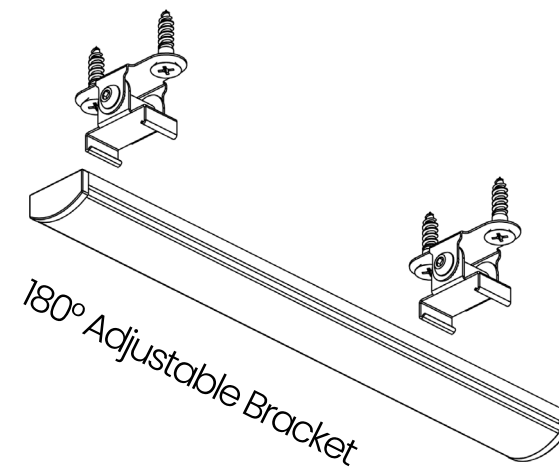



POLA



POLA

Key features

Up to 1400lm/ft
Up to 160lm/W
Up to 95 CRI
Tunable white
Dim to warm
RGBW
Wet location

Application

Entrance Hall
Residential
Wardrobe
Corridor

Installation type

Suspended
Closet Rode
Surface Mounted
(Hidden Bracket)
(Canopy)

Features to Benefits

Dot and pixelation free
Multiple optics offers
Long continuous run
Multiple mounting bracket options


Light uniformity, comfort and glare control
Precise and targeted highlighting
Seamless lighting continuity
Endless creativity

Learn more about Pola 



CANATECH
S O L U T I O N S

POLA

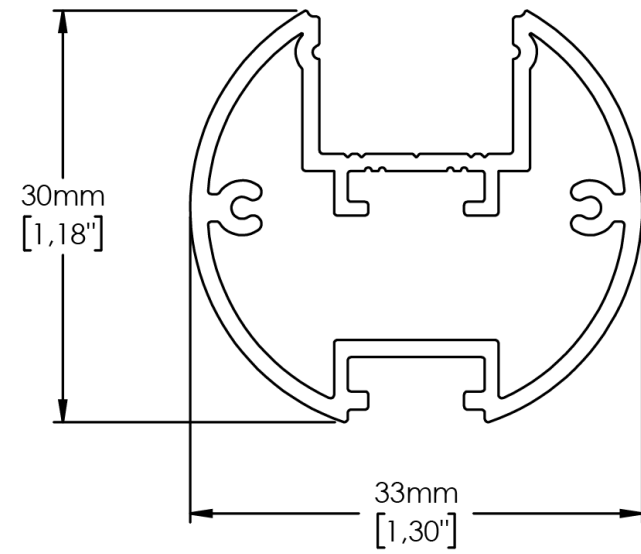

Other Features



IP20
RATED

IP44
RATED





IP67
RATED



Can be used
to comply with
2019 Title24
Part 6
JA8
High efficacy LED light
source requirements


LM79
LM80

2 Step
MacAdam
Ellipse

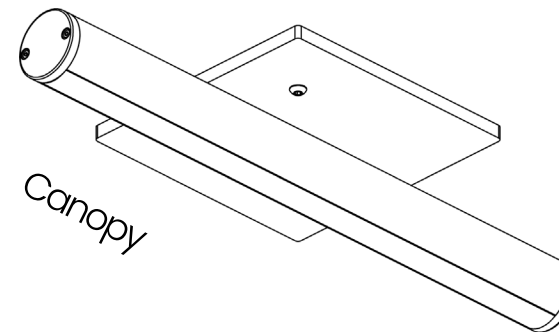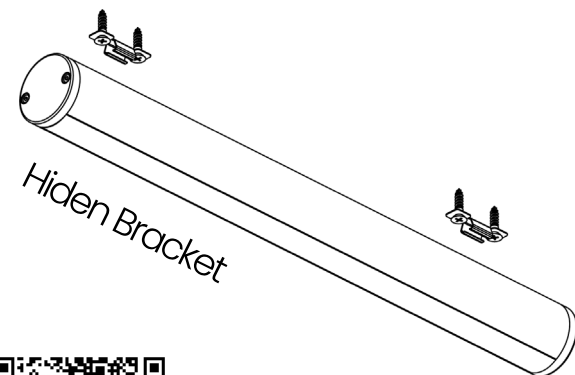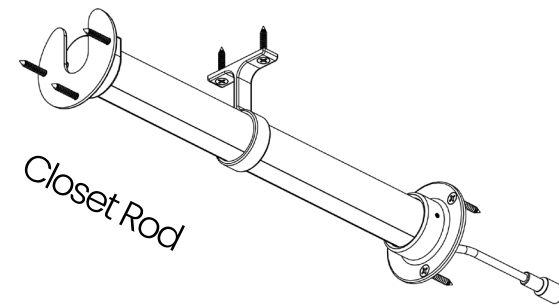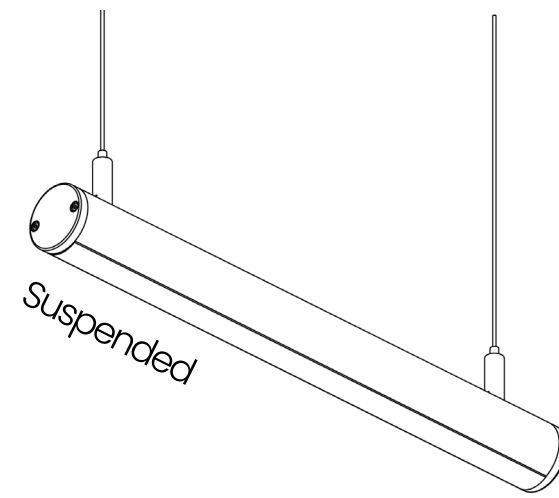

CANATECH
SOLUTIONS



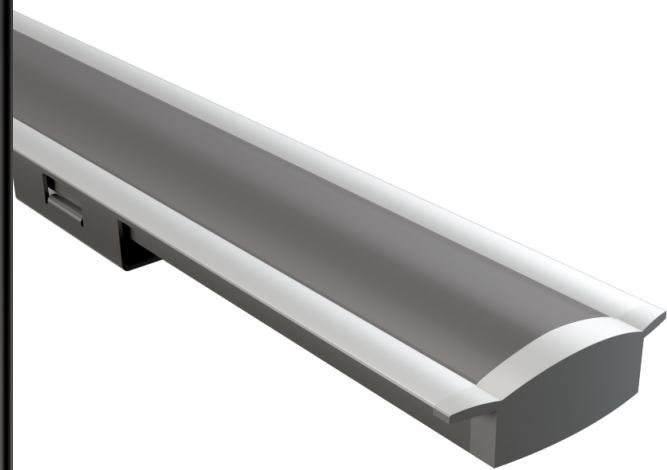

ROBERTHA

Key features

Up to 1400lm/ft
Up to 160lm/W
Up to 95 CRI
Dim to warm
RGBW

Application

Residential
Cabinet
Restaurant
Display

Installation type

Surface Mounted
(Straight Fixed Bracket)
Adhesive Tape (3M)
Magnetic

Features to Benefits

Dot and pixelation free
Long continuous run
Dim to warm
RGBW LEDs



Light uniformity, comfort and glare control
Seamless lighting continuity
Functional to cozy lighting
Endless ambiance creation

Learn more about Robertha 



CANATECH
S O L U T I O N S

ROBERTHA

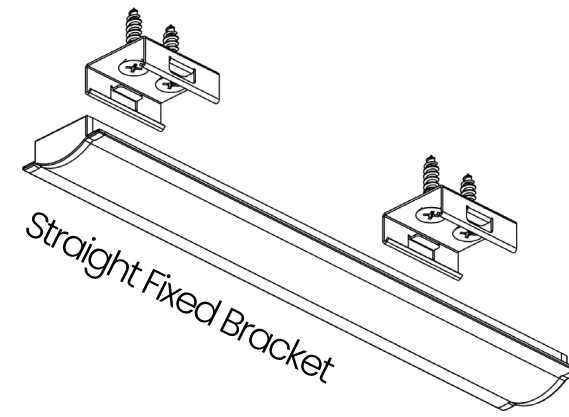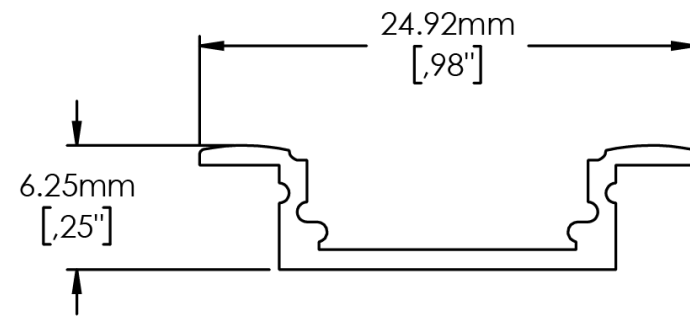

Other Features



IP20
RATED


IP44
RATED



Can be used to comply with
2019 Title24 Part 6
JA8
High efficacy LED light source requirements

LM79
LM80

2 Step
MacAdam
Ellipse

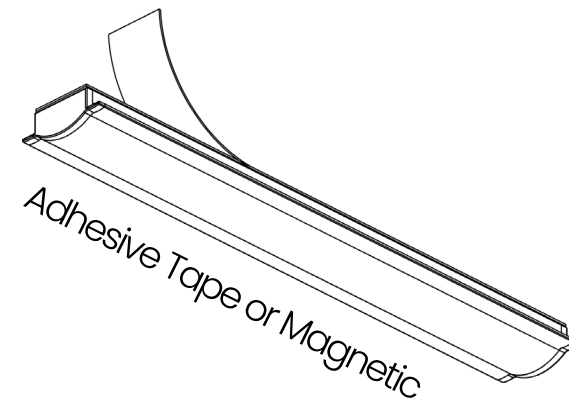

CANATECH
SOLUTIONS





CERCIO



CERCIO

Key features

Up to 21000lm
Up to 160lm/W
Up to 95 CRI
Tunable white
Dim to warm
RGBW

Application

Retail
Commercial
Entrance Hall
Hospitality
Institutional

Installation type

Surface Mounted
Suspended

Features to Benefits

Dot and pixelation free
Multiple mounting options
Dim to warm
Customizable sizes and patterns



Light uniformity, comfort and glare control
Endless creativity
Functional to cozy lighting
Endless creativity

Learn more about Cercio 



CANATECH
S O L U T I O N S

CERCIO

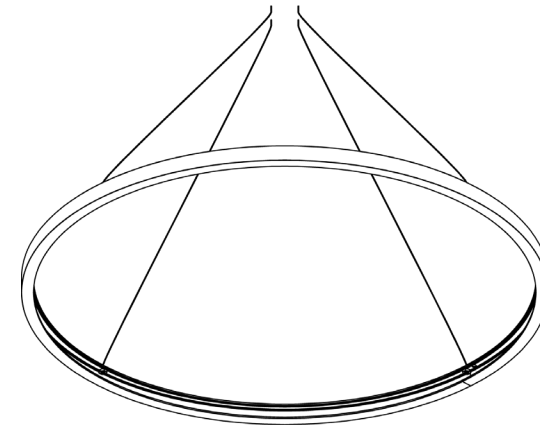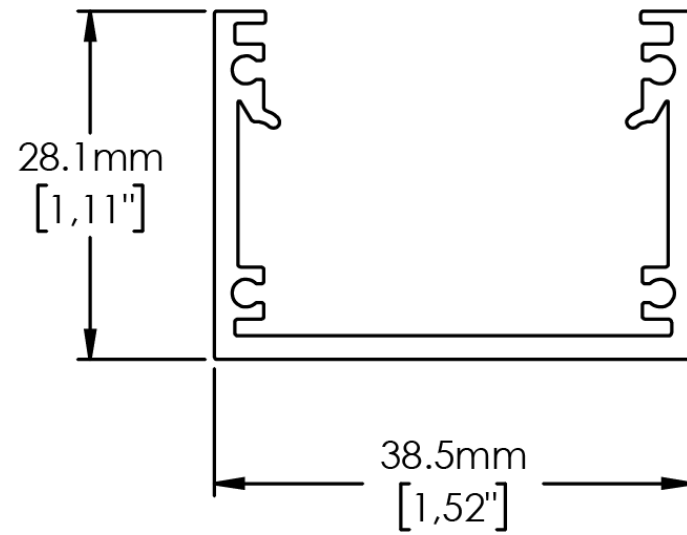

Suspended



Other Features




IP20
RATED

IP44
RATED



Can be used
to comply with
2019 Title24
Part 6
JA8
High efficacy LED light
source requirements


2 Step
MacAdam
Ellipse

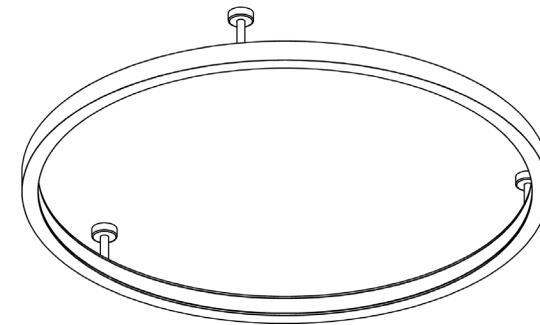


Surface Mounted




Other Features

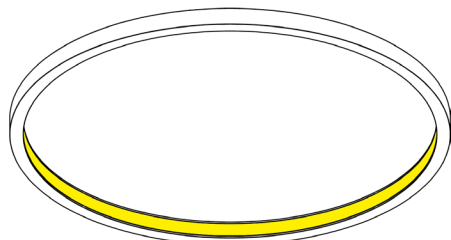

Outside Lit

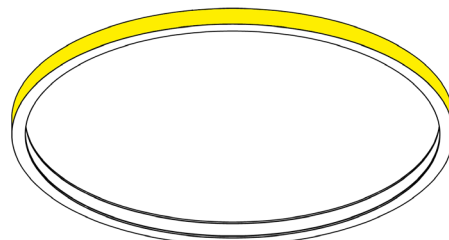

Inside Lit

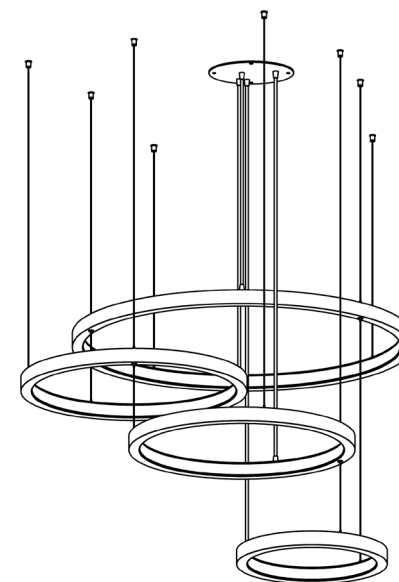

Custom




CANATECH
SOLUTIONS





PALAZOMASTER

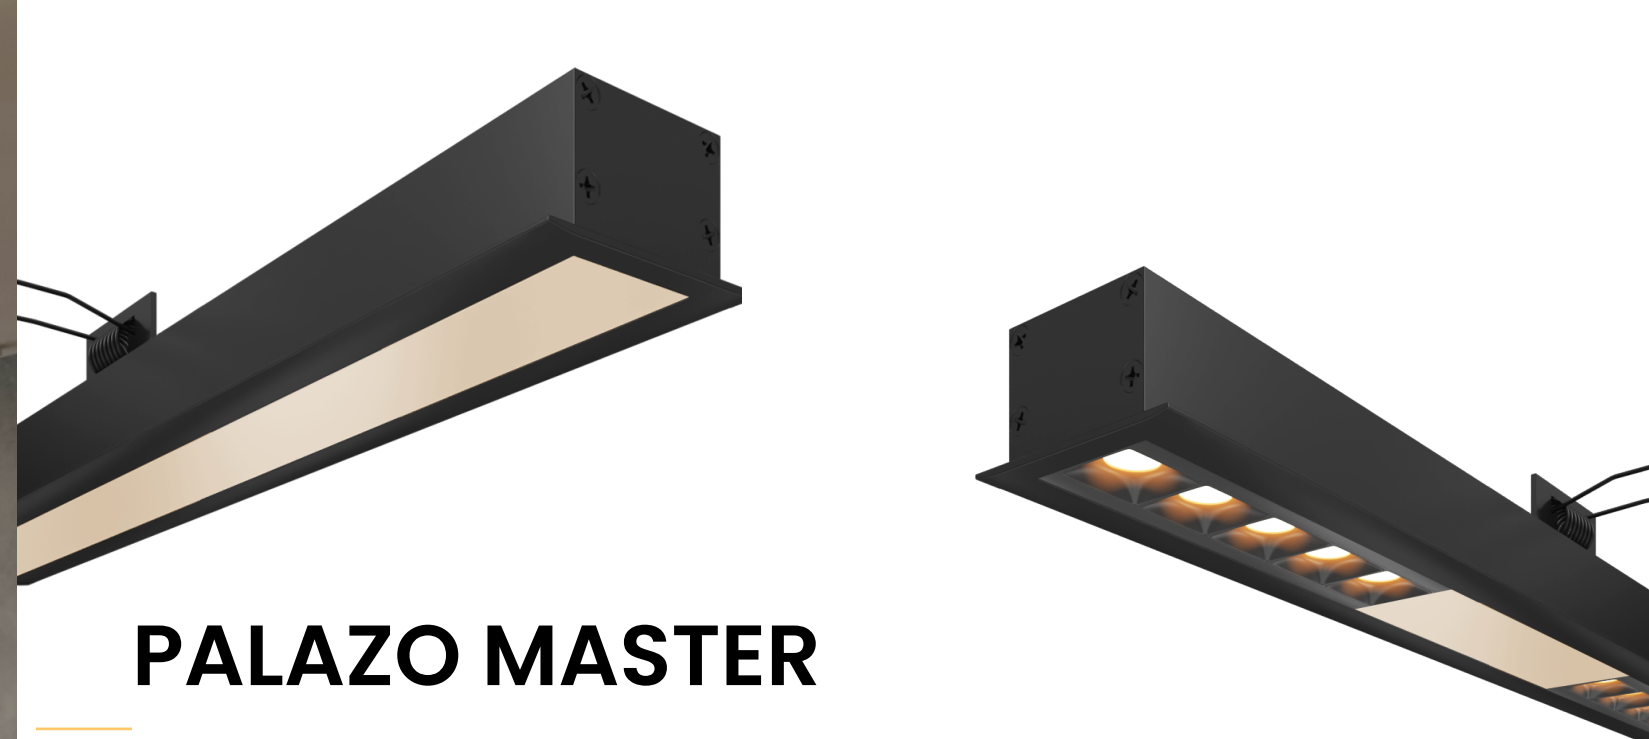

PALAZO MASTER

Key features

- Up to 1100lm/ft
- Up to 145lm/W
- Up to 90 CRI
- Tunable white
- Dim to warm

Application

- Office
- Commercial
- Corridor
- Entrance Hall

Installation type

- Recessed
- (Spring Bracket)
- (Hidden Bracket)

Features

- Multiple optics offers
- Tooless field installation
- Dim to warm
- Long continuous run



Benefits

- precise and targeted highlighting
- Fast onsite installation
- Functional to cozy lighting
- Seamless lighting continuity

Learn more about Palazo Master 



PALAZOMASTER

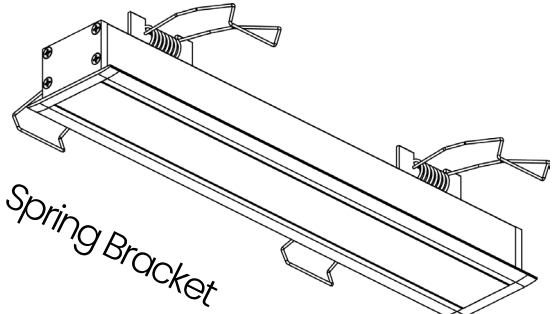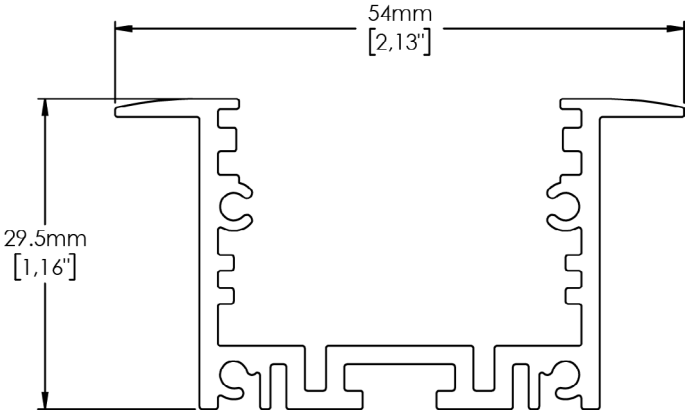

Other Features



5
year
warranty

IP20
RATED

IP44
RATED

IP67
RATED




UL
US


Can be used
to comply with
2019 Title24
Part 6
JA8
High efficacy LED light
source requirements



+50,000hrs
lifespan

2 Step
MacAdam
Ellipse

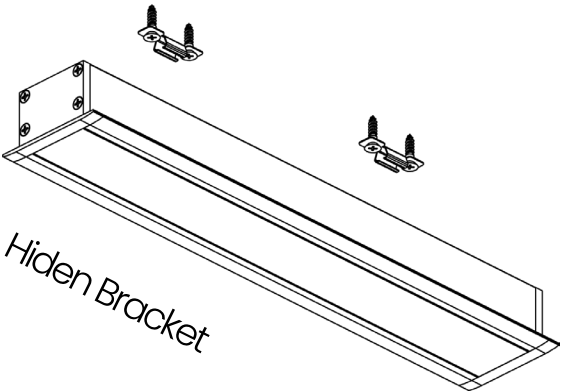

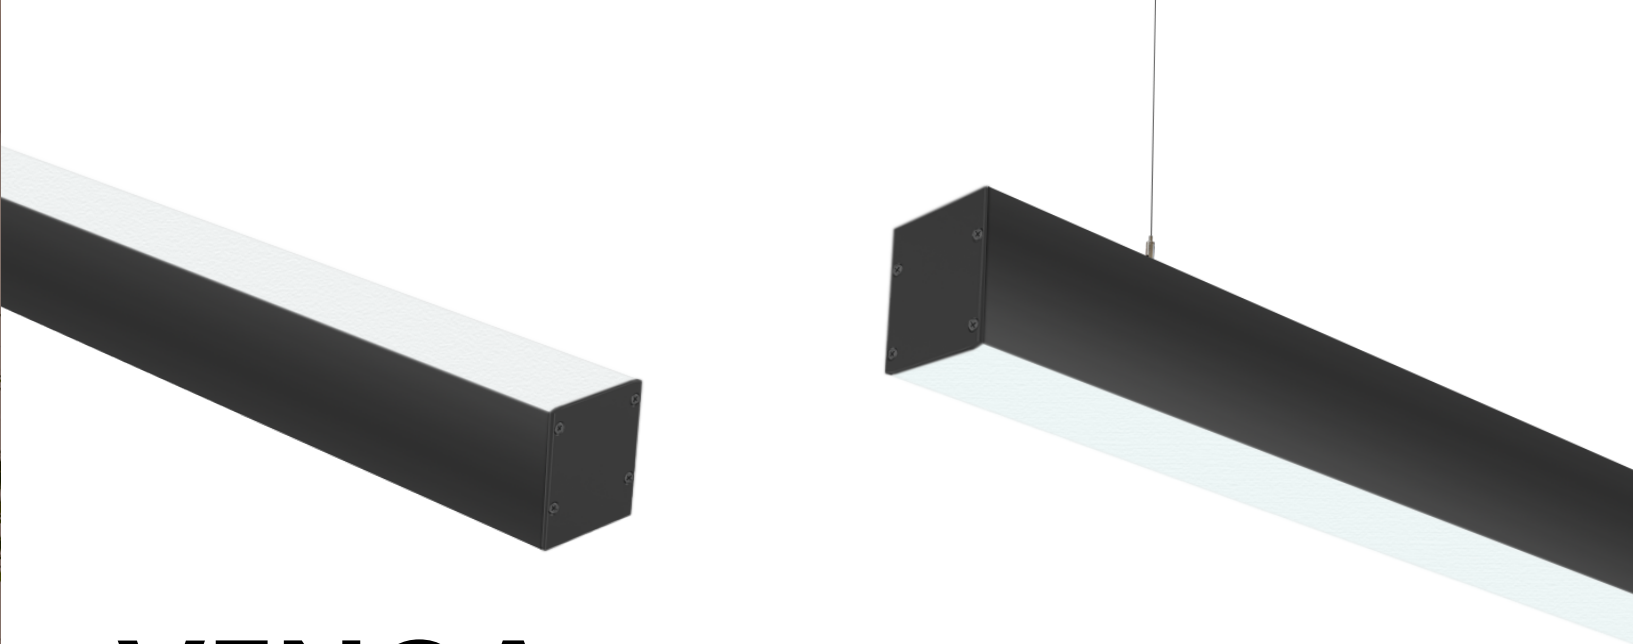

VENGA

Key features

Up to 1400lm/ft
Up to 160lm/W
Up to 95 CRI
Tunable white
Dim to warm
RGBW

Application

Residential
Entrance Hall
Wall Accent
Corridor

Installation type

Suspended
Wall Mounted Bracket
Surface Mounted



Features to Benefits

Dot and pixelation free
Dim to warm
Multiple mounting options
Long vertical to horizontal continuous run



Light uniformity, comfort and glare control
Functional to cozy lighting
Endless flexibility
Seamless lighting continuity

Learn more about Venga 



CANATECH
S O L U T I O N S

VENGA

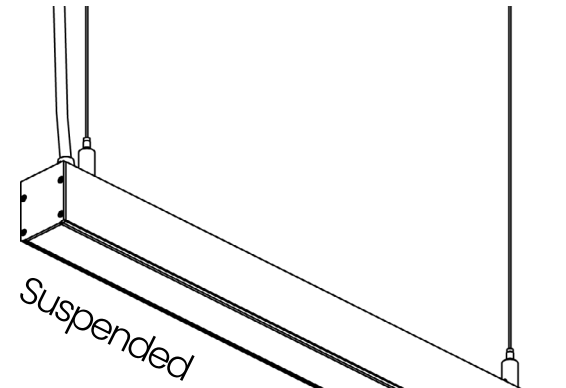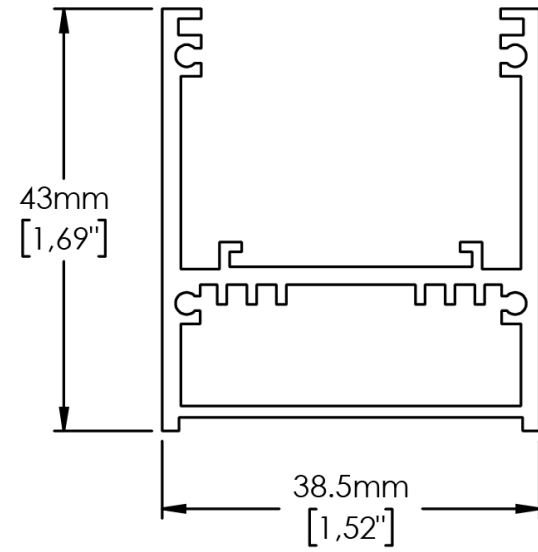

Other Features



IP20
RATED

IP44
RATED

IP67
RATED





Can be used
to comply with
2019 Title24
Part 6
JA8
High efficacy LED light
source requirements



+50,000hrs
lifespan


2 Step
MacAdam
Ellipse

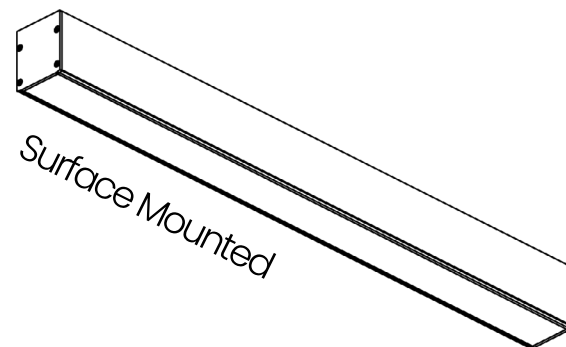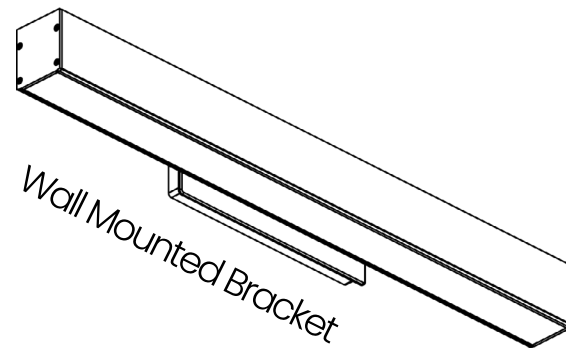

CANATECH
SOLUTIONS



VENGA SLIM

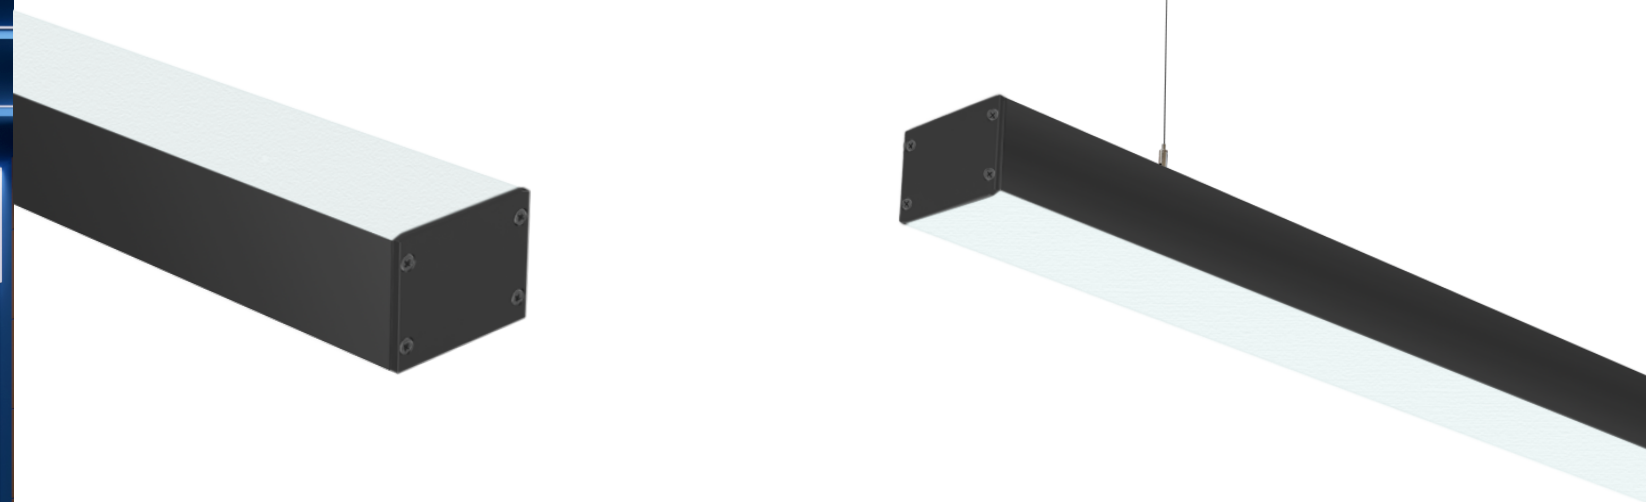

VENGA SLIM

Key features

Up to 1400lm/ft
Up to 160lm/W
Up to 95 CRI
Tunable white
Dim to warm
RGBW

Application

Commercial
Cove Lighting
Entrance Hall
Conference Room

Installation type

Suspended
Surface Mounted

Features to Benefits

Dot and pixelation free
Multiple mounting options
Minimalist size
Long vertical to horizontal continuous run




Light uniformity, comfort and glare control
Endless flexibility
Versatile and flexible for restrained spaces
Seamless lighting continuity

Learn more about Venga Slim 



CANATECH
S O L U T I O N S

VENGA SLIM

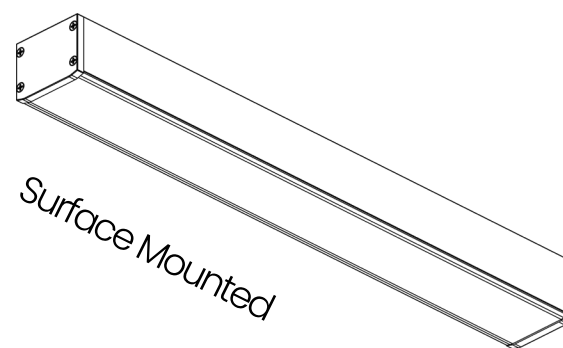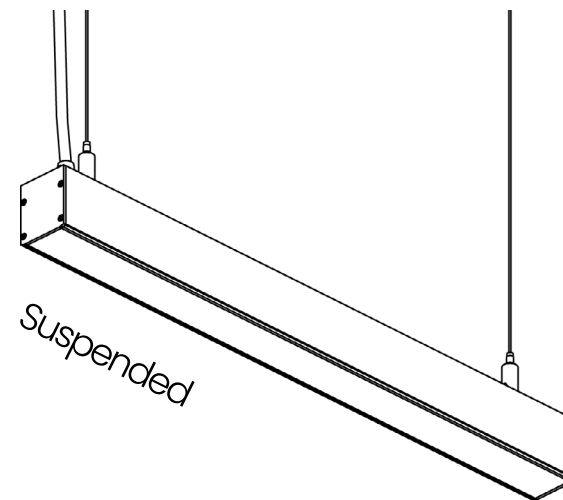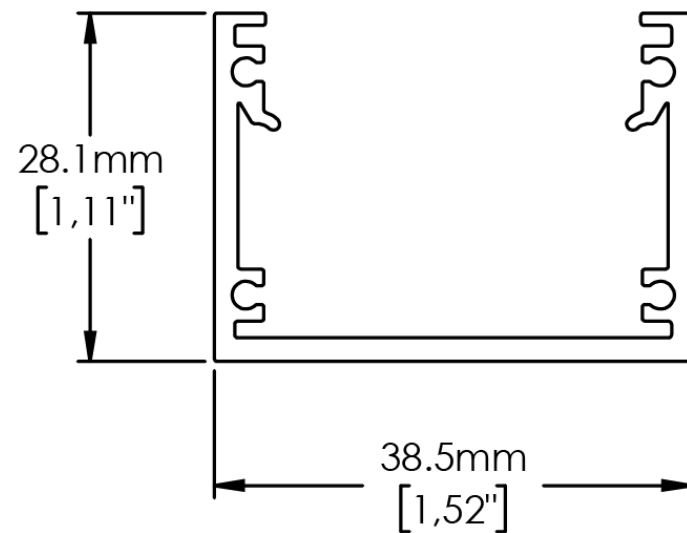

Other Features



IP20
RATED

IP44
RATED

IP67
RATED



Can be used
to comply with
2019 Title24
Part 6
JA8
High efficacy LED light
source requirements

+50,000hrs
lifespan

2 Step
MacAdam
Ellipse

CANATECH
SOLUTIONS





ALINA

Key features

Installation Flexibility
Field Adjustable
Large Fixtures Offering
Continuous Run

Application

Retail
Office
Commercial
Entrance Hall
Hospitality
Residential

Installation type

Suspended
Surface Mounted
Recessed
Recessed Trimless

Features to Benefits

Multiple fixtures offers
Multiple mounting options
Fully connected
Customizable sizes and patterns



Precise, long reach and targeted highlighting
Endless flexibility and modularity
Individually or grouping fixtures lighting control
Evolutive and endless creativity

Learn more about Alina 



CANATECH
S O L U T I O N S

ALINA

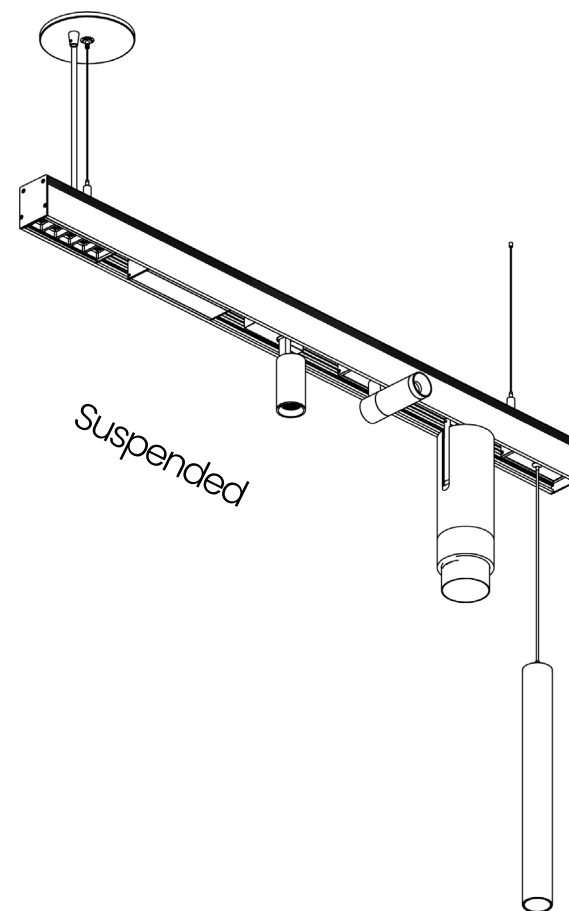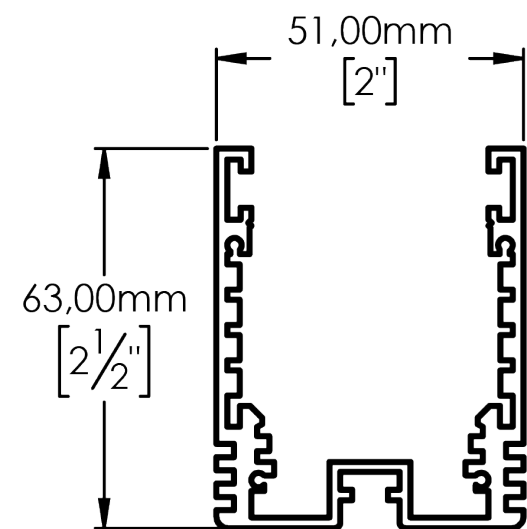

Other Features





IP44
RATED


RoHS



Can be used
to comply with
2019 Title24
Part 6
JA8
High efficacy LED light
source requirements

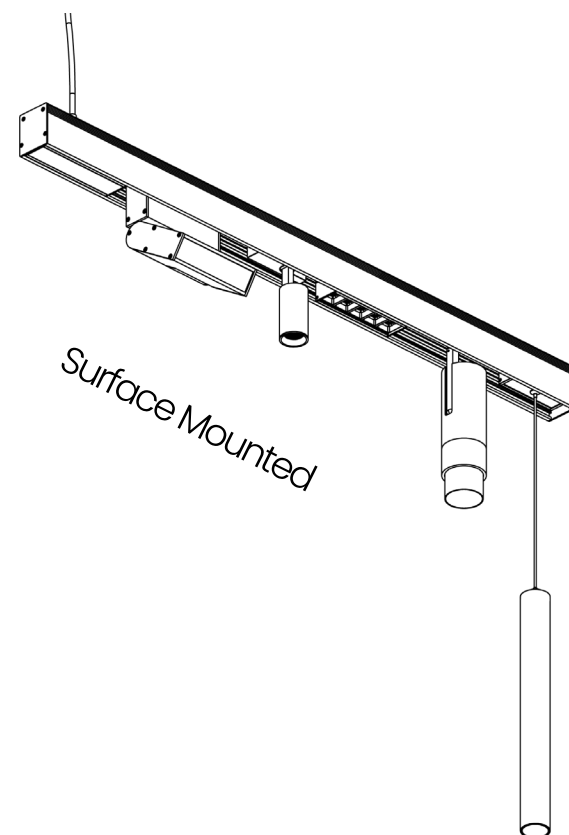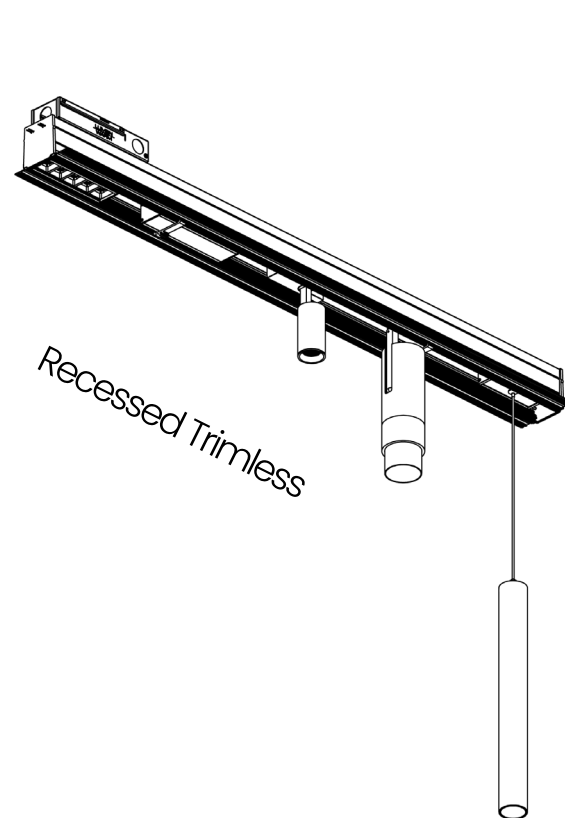

CANATECH
SOLUTIONS

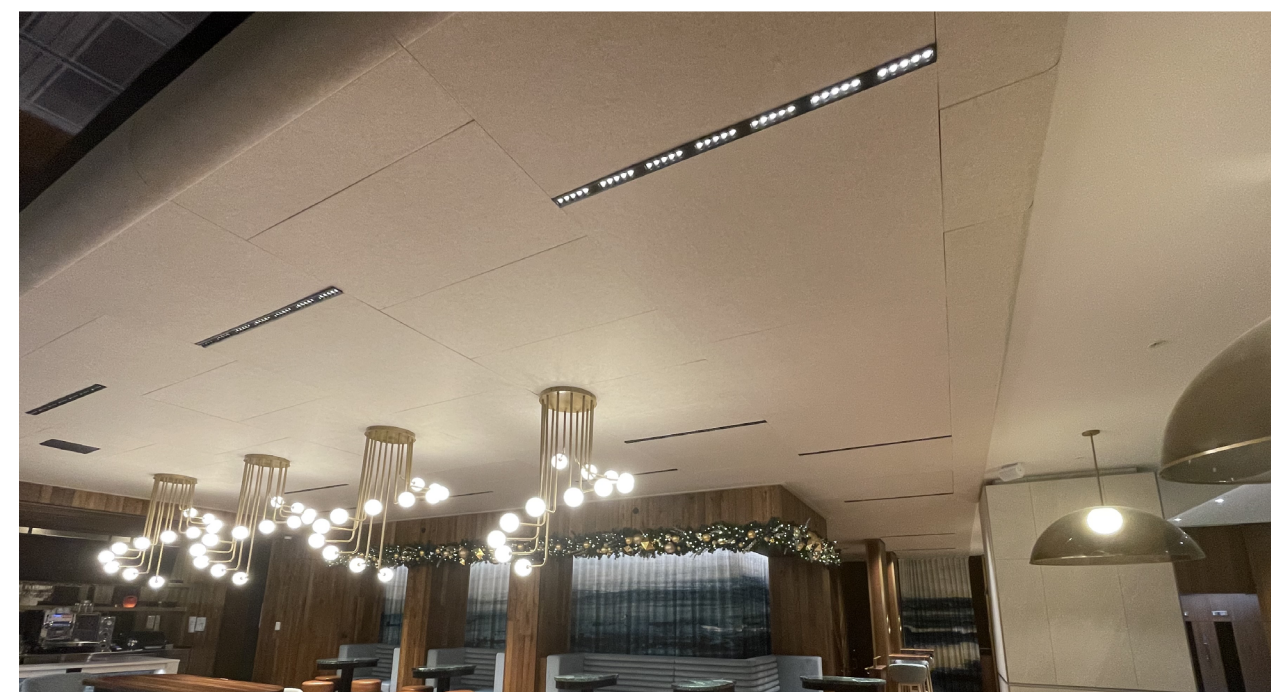



BORIS



BORIS

Key features

Up to 6000lm/ft
Up to 77lm/W

Application

Car Dealership
Commercial
Entrance Hall
Agora

Installation type

Suspended



Features to Benefits

Large Lumen package span
High Lumen output
Multiple optics offers
Sleek lines and silhouette




Precise, long reach and targeted highlighting
Enhancing projects and products visibility
Precise and targeted highlighting
Timeless design

Learn more about Boris 




CANATECH
S O L U T I O N S

BORIS

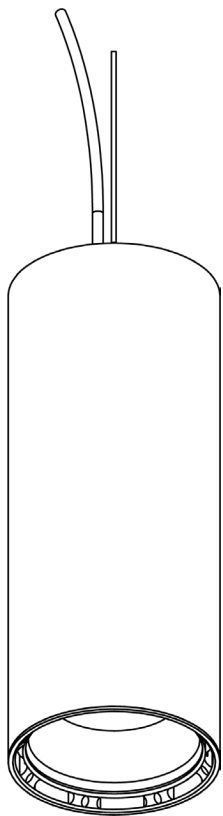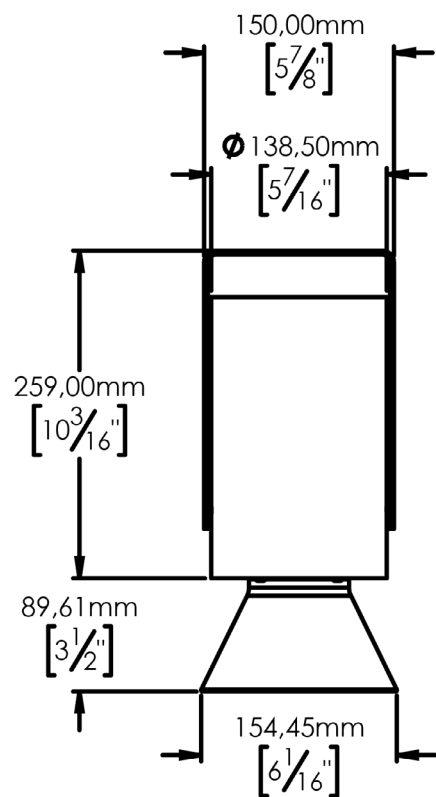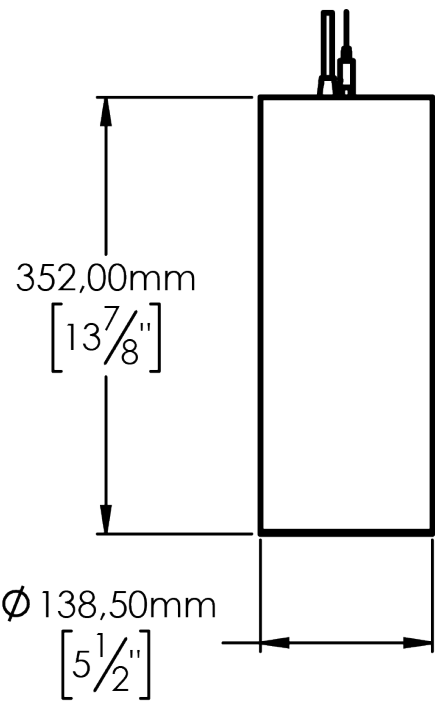

Suspended

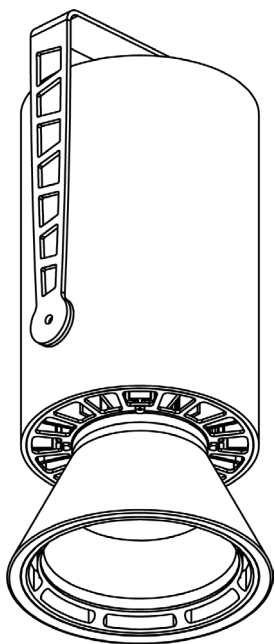

Suspended



Other Features



5
year
warranty


Can be used
to comply with
2019 Title24
Part 6
JA8
High efficacy LED light
source requirements



TM30



EROS

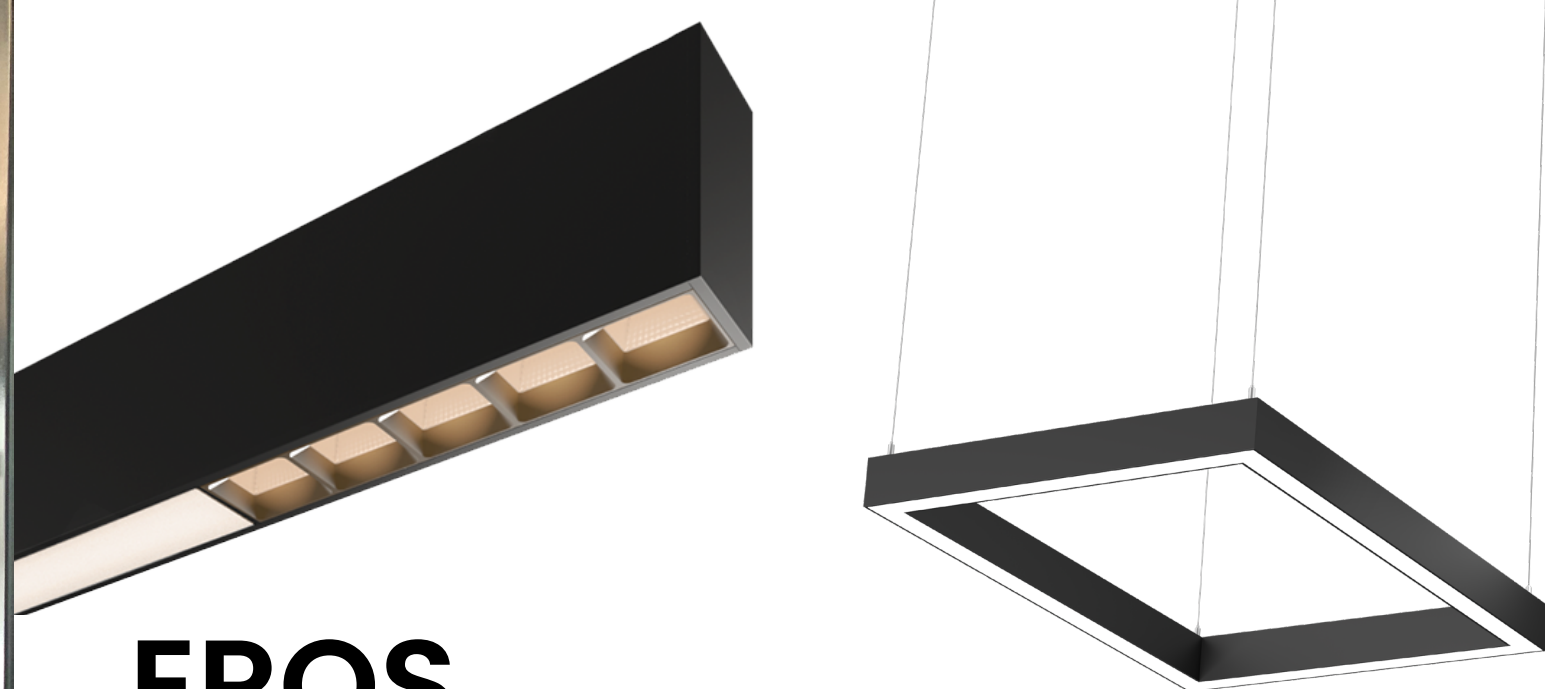

EROS

Key features

Up to 1100lm/ft
Up to 145lm/W
Up to 90 CRI
Tunable white
Dim to warm

Application

Car Dealership
Office
Commercial
Entrance Hall
Hospitality
Institutional

Installation type

Suspended
Wall Mounted Bracket
Surface mounted
Recessed
Recessed Trimless



Features to Benefits

Dot and pixelation free
Multiple optics offers
Multiple mounting options
Sleek and pure lines


Light uniformity, comfort and glare control
Precise and targeted highlighting
Endless flexibility
Timeless design

Learn more about Eros 



CANATECH
S O L U T I O N S

EROS

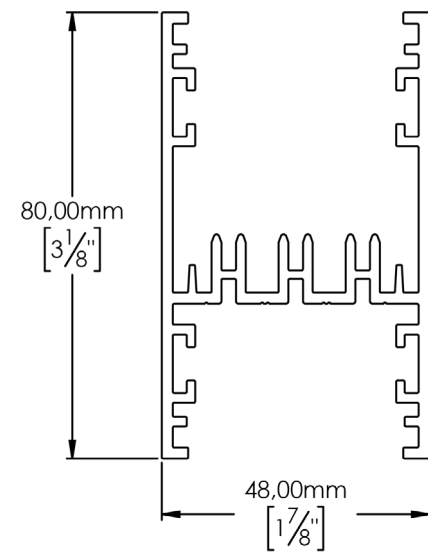

Other Features







IP22
RATED



LM79
LM80



CANATECH
SOLUTIONS

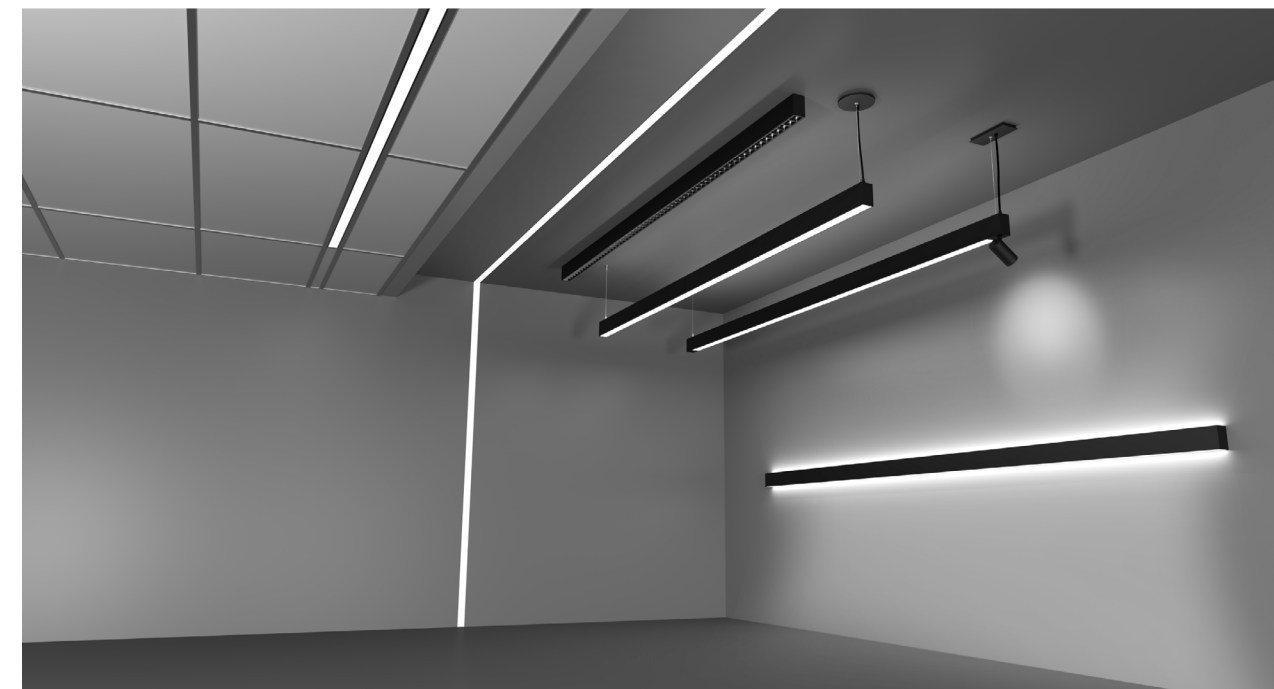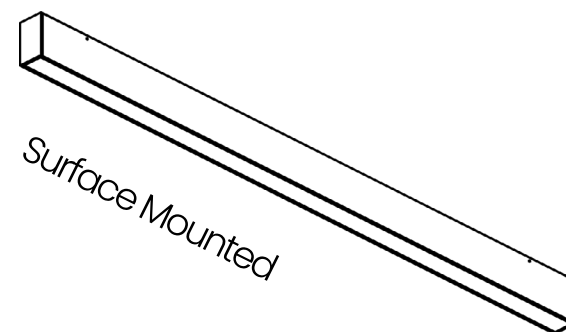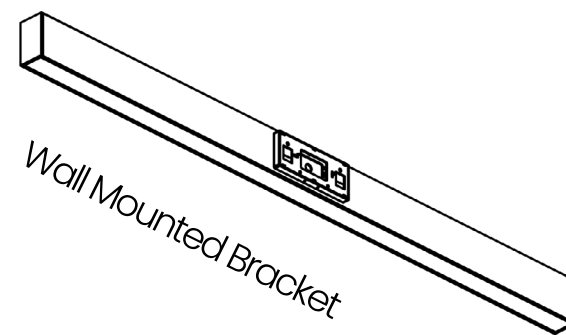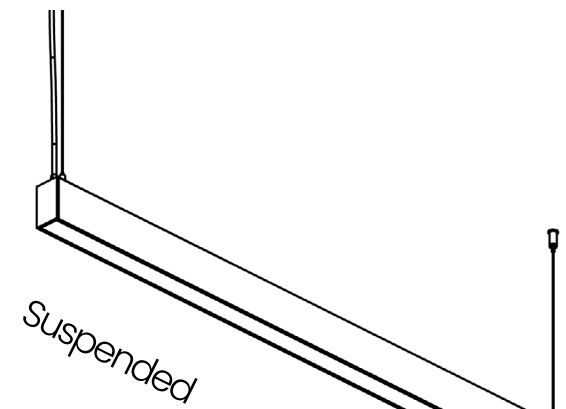



ARKALUX



ARKALUX

Key features


Up to 95 CRI
Tunable white
Dim to warm
RGBW

Application

Cove Lighting
Residential
Lounge
Restaurant

Installation type

Trimless

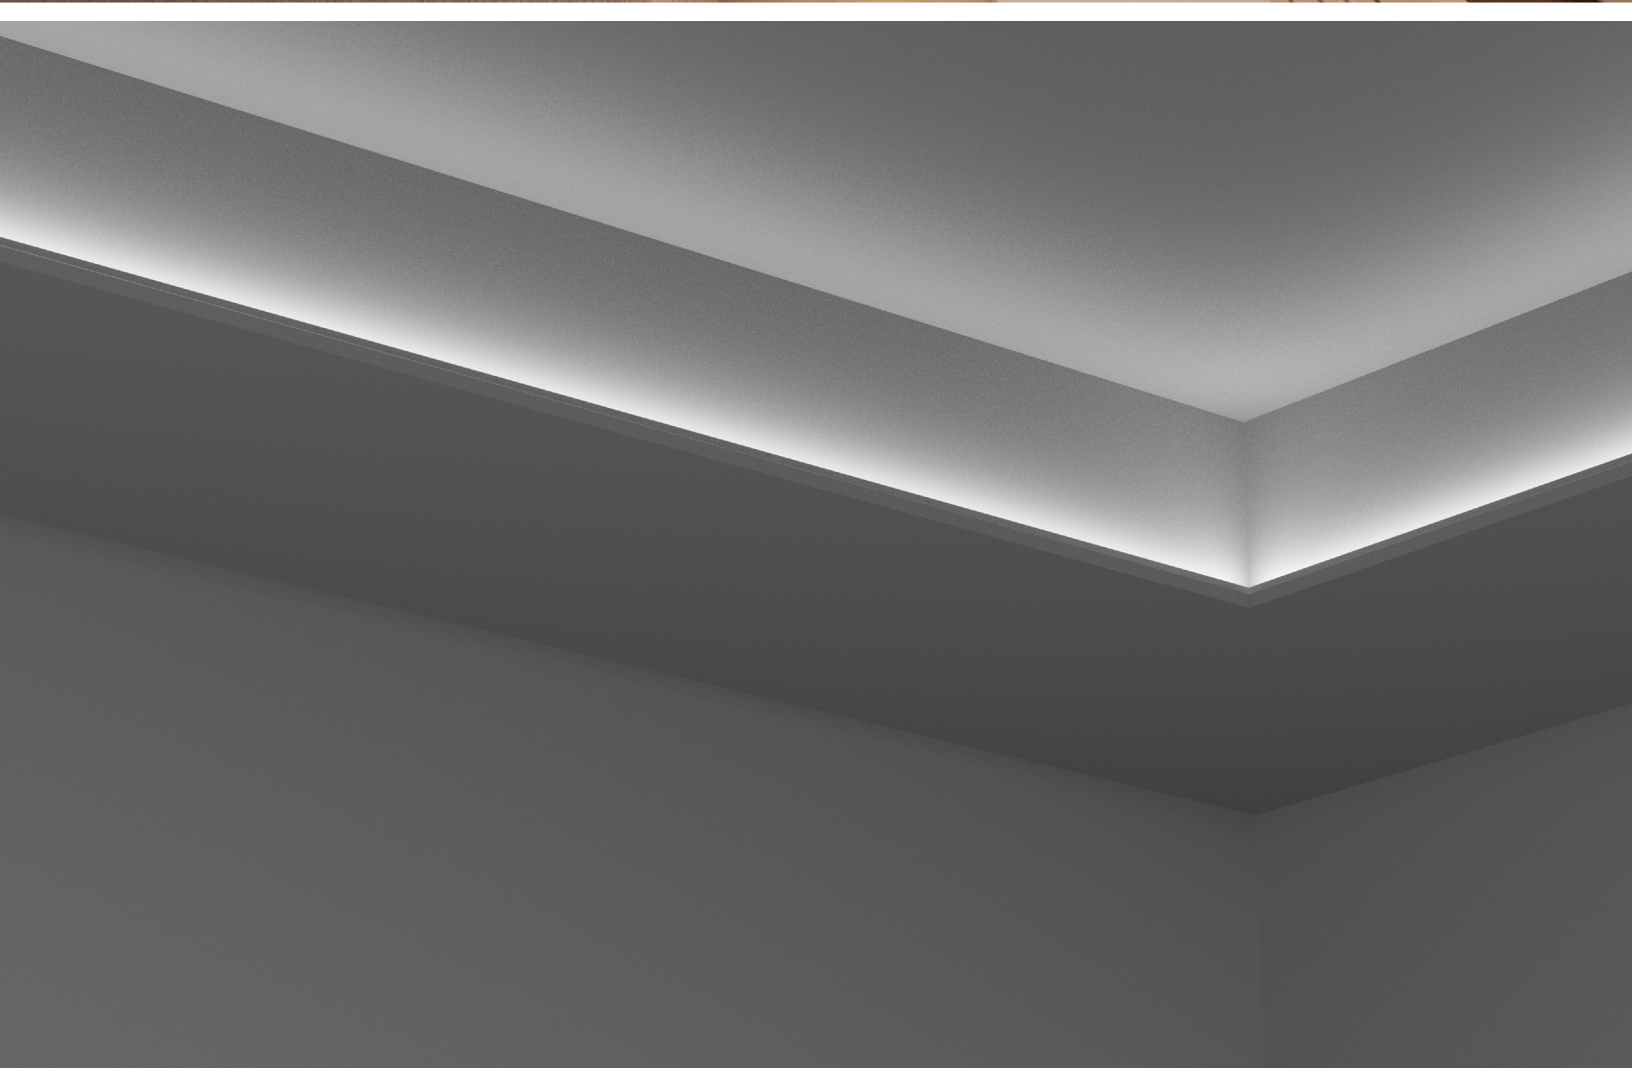

Features to Benefits

Dot and pixelation free
Hidden light source
Multiple light projection angles
Dim to warm


Light uniformity and glare control
Visual comfort
Precise and targeted highlighting
Functional to cozy lighting

Learn more about Arkalux 



CANATECH
S O L U T I O N S

ARKALUX

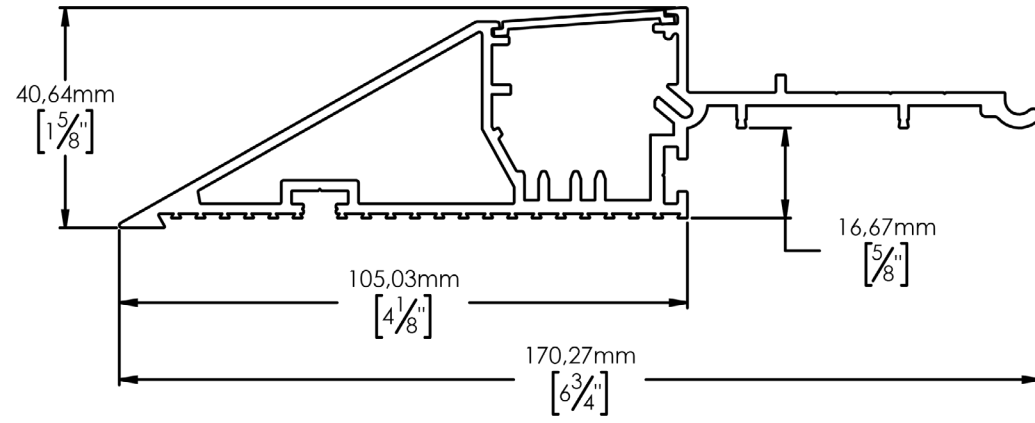

CANATECH
SOLUTIONS



COVE LIGHTING



BOGOTA

Key features

Up to 2220lm
Up to 74lm/W
Dim to warm
Up to 90 CRI

Application

Hospitality
Residential
Museum
Accent Lighting

Installation type

Surface Mounted
Recessed

Features to Benefits

Multiple optics offers
Multiple sizes
Dim to warm
Decorative accents


Precise and targeted highlighting
Endless flexibility
Functional to cozy lighting
Endless modularity

Learn more about Bogota 



CANATECH
S O L U T I O N S

BOGOTA

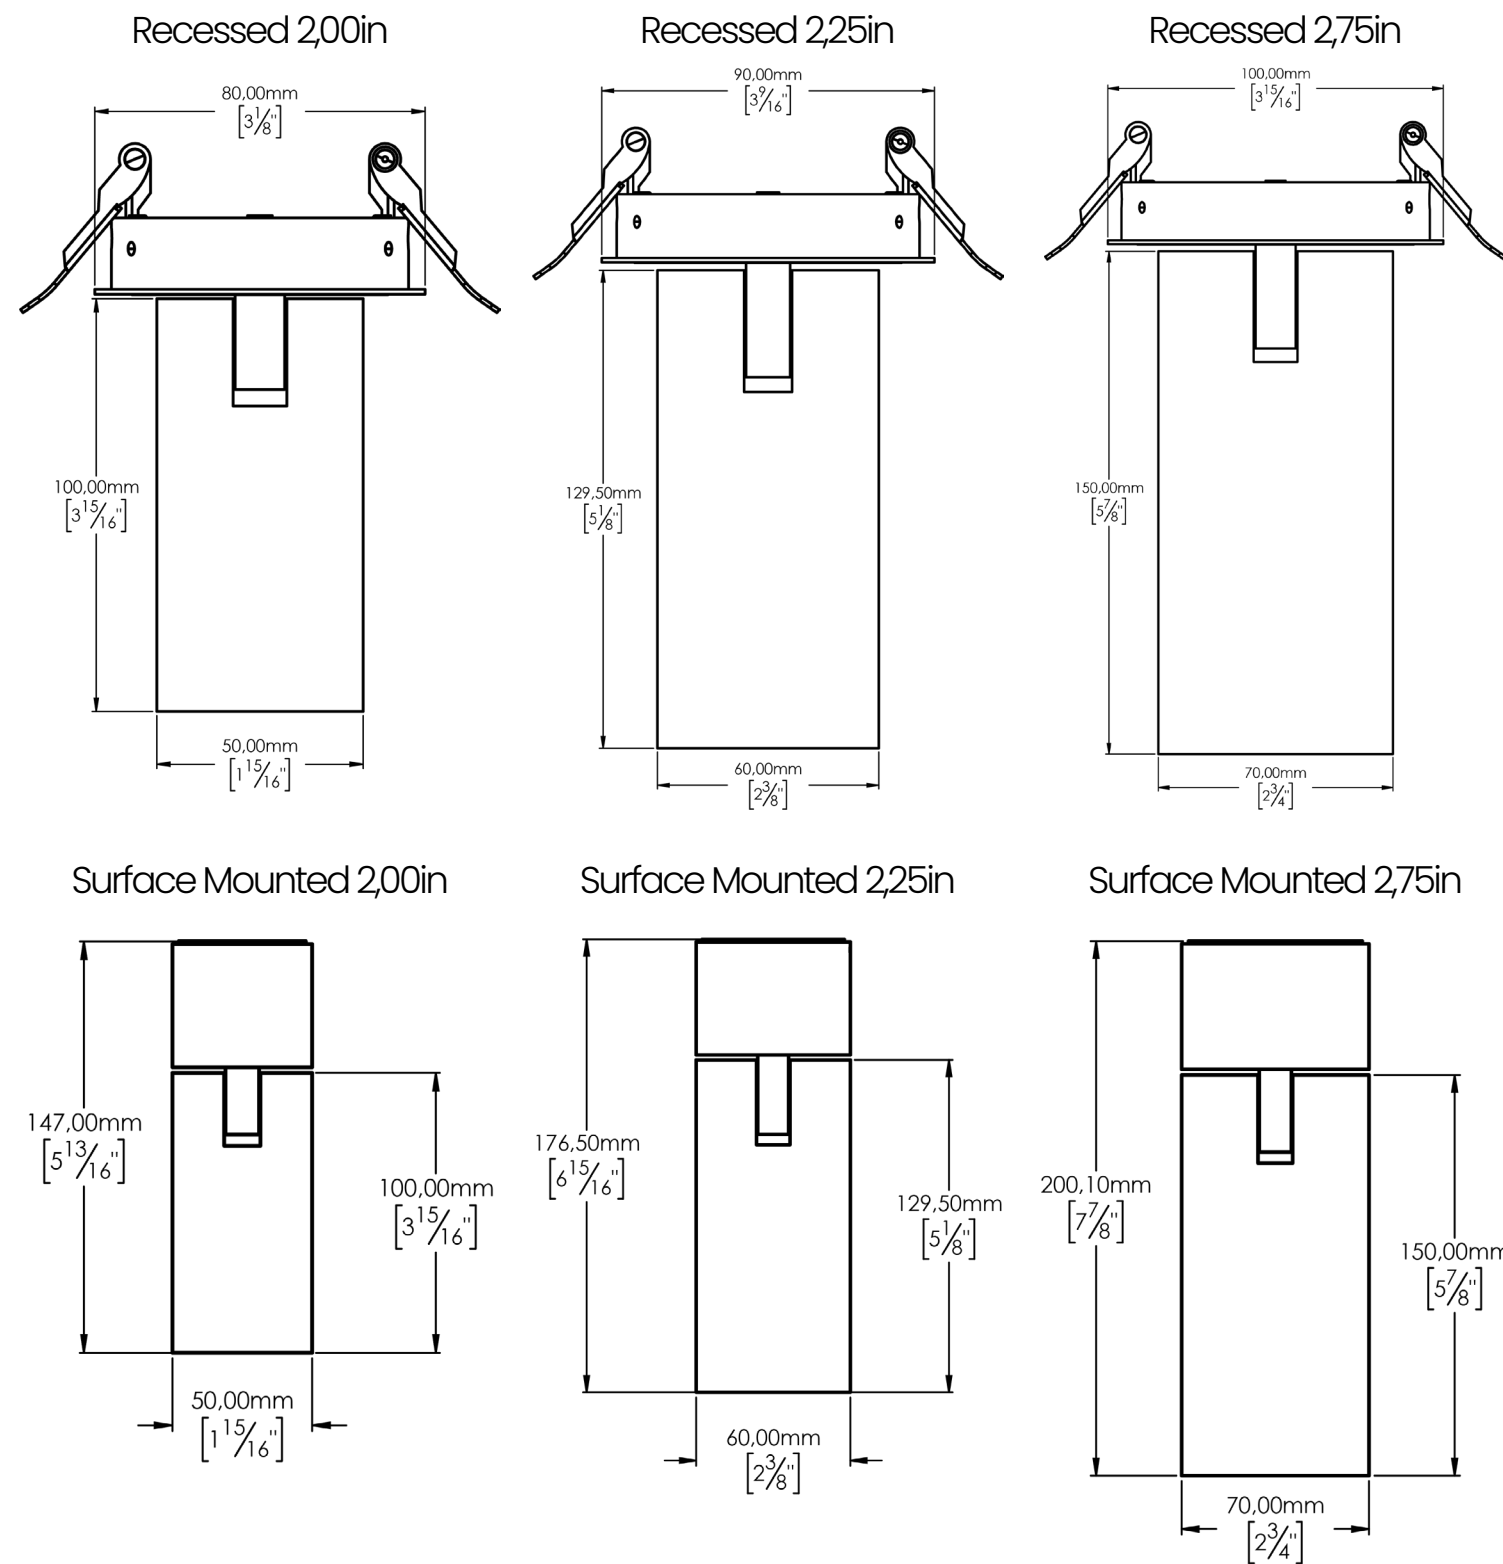

Other Features



**IC
RATED**


**IP22
RATED**




Can be used
to comply with
2019 Title24
Part 6
JA8
High efficacy LED light
source requirements

RoHS

TM30

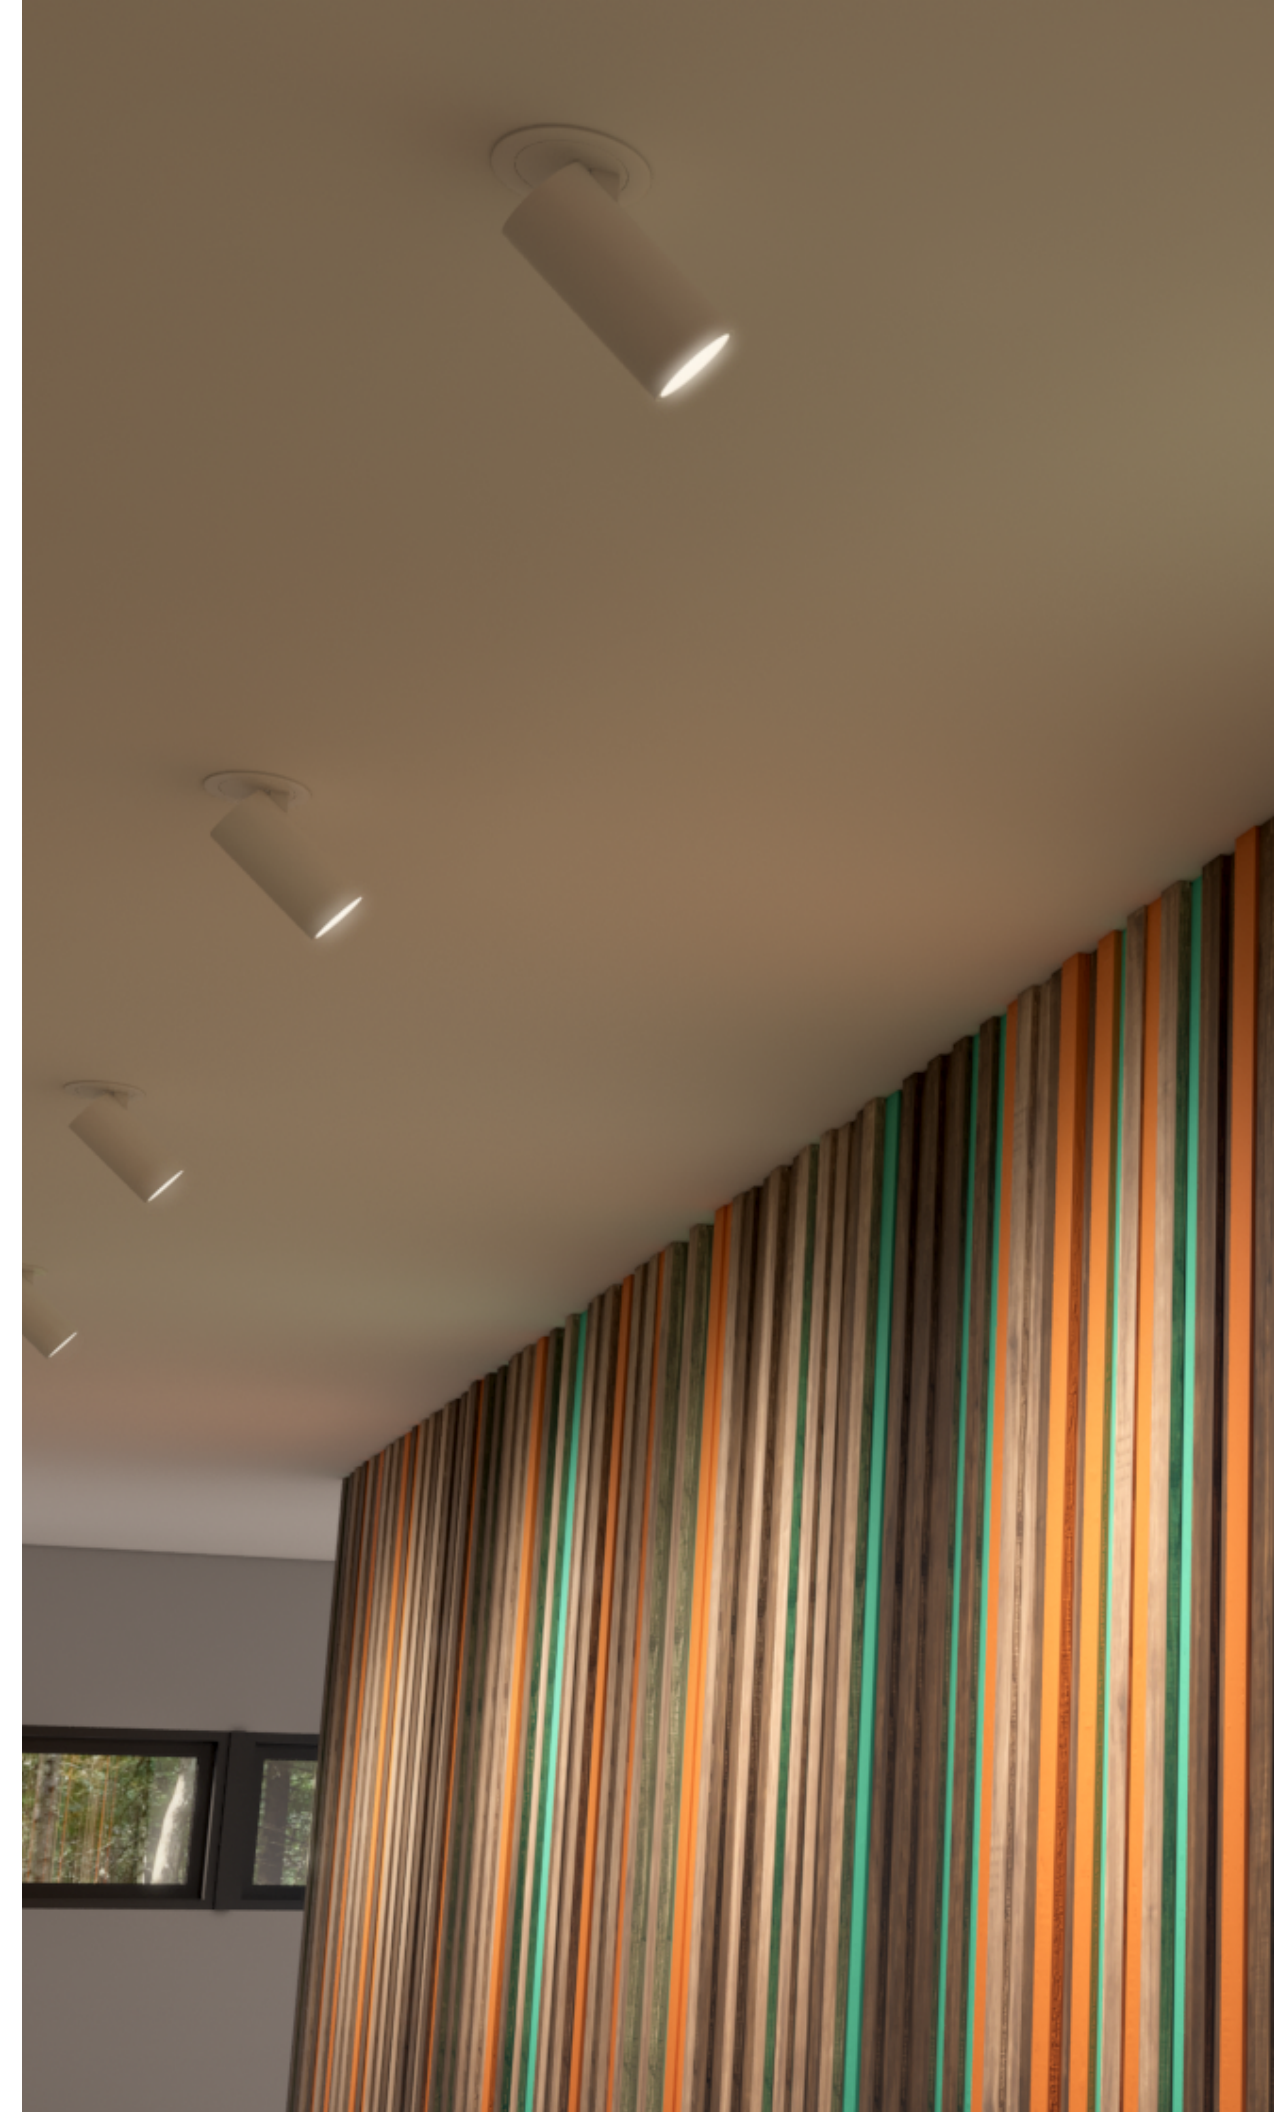

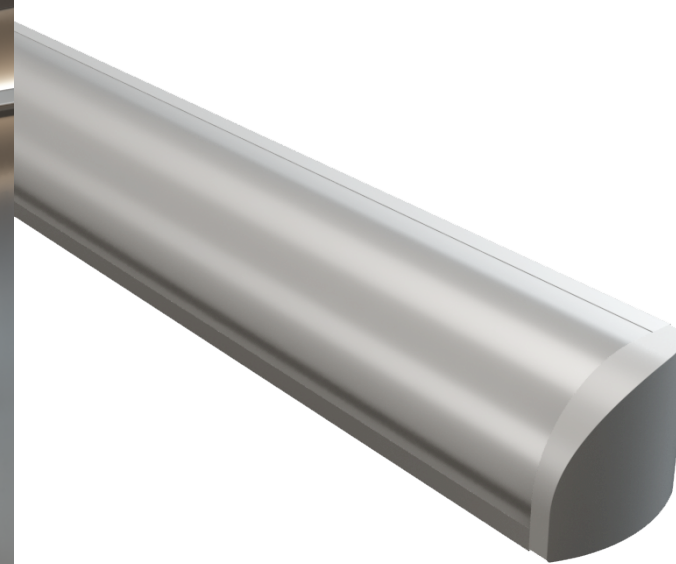

CONNOR

Key features

Up to 1400lm/ft
Up to 160lm/W
Up to 95 CRI
Dim to warm
RGBW

Application

Retail
Residential
Display
Wardrobe

Installation type

Adhesive Tape (3M)
Magnetic

Features to Benefits

Invisible mounting brackets
Fully assembly or field cuttable
Dim to warm
RGBW LEDs


Sleek and seamless installation
Fast onsite installation flexibility
Functional to cozy lighting
Endless ambiance creation

Learn more about Connor 



CANATECH
S O L U T I O N S

CONNOR

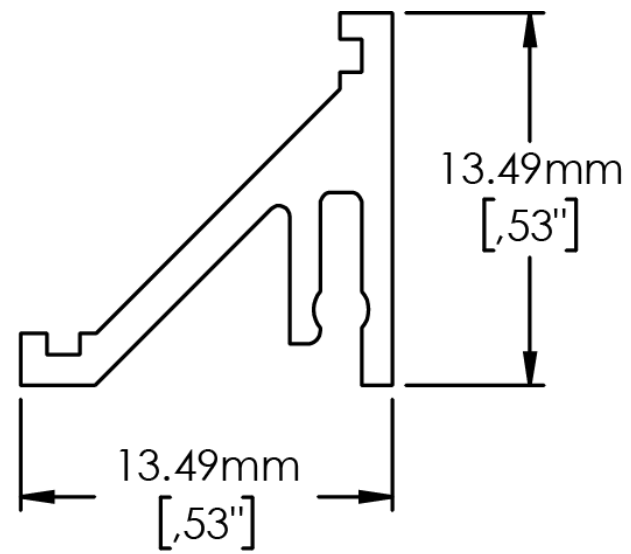

Other Features



IP20
RATED


IP44
RATED



Can be used
to comply with
2019 Title24
Part 6
JA8
High efficacy LED light
source requirements

LM79
LM80

2 Step
MacAdam
Ellipse

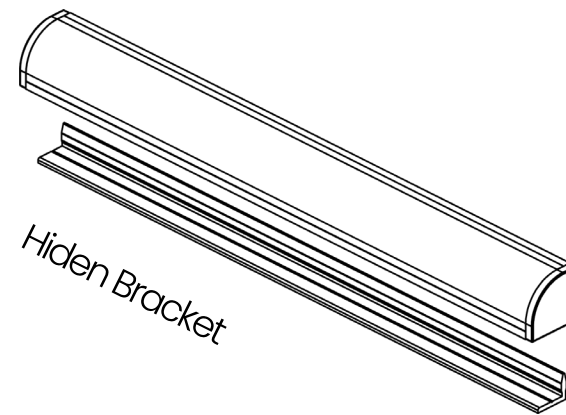

Adhesive Tape or Magnetic

CANATECH
SOLUTIONS





DESFIOLI



DESFIOLI

Key features

Up to 600lm - 1000lm
Up to 100lm/W - 85lm/W
Up to 96 CRI
Dim to warm

Application

Retail
Office
Commercial
Cove Lighting
Entrance Hall

Installation type

Recessed Trim
Recessed Trimless

Features to Benefits

Multiple shapes and sizes
Multiple optics offers
Multiple mounting options
Dim to warm

Endless creativity
Precise and targeted highlighting
Endless flexibility
Functional to cozy lighting








Learn more about Desfioli 



CANATECH
S O L U T I O N S

DESFIOLI

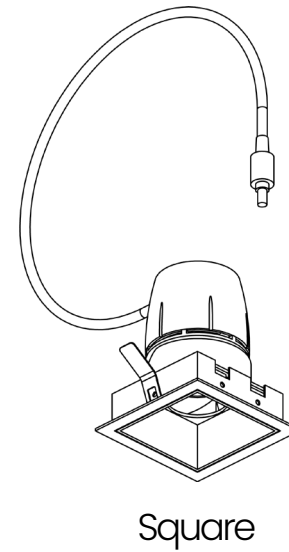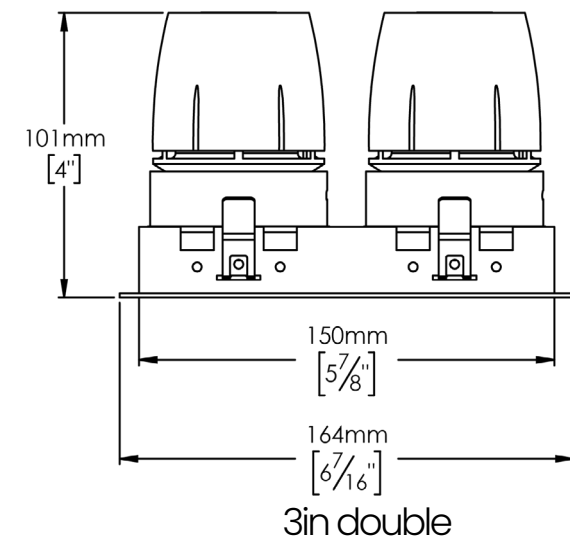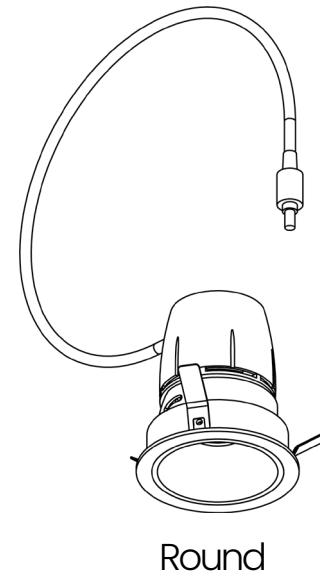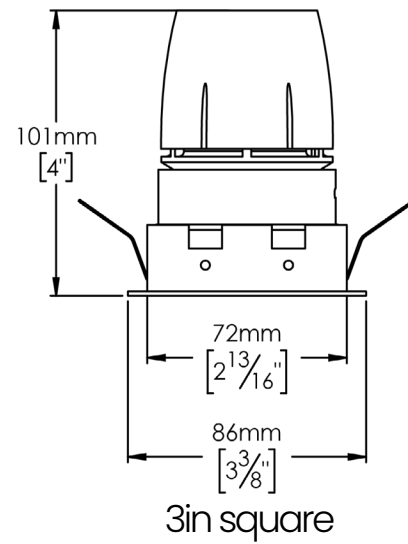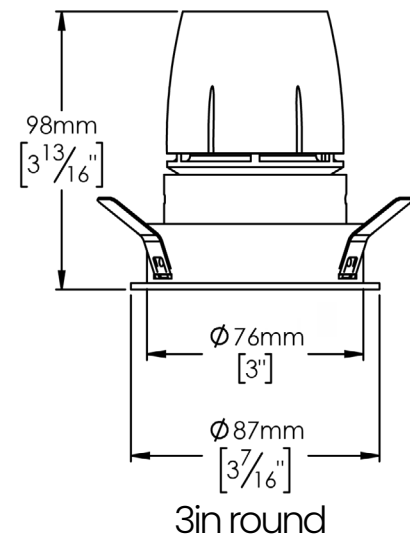

*The 4-inch option is also available in round or square, but not in double.

Other Features




**IP20
RATED**



RoHS



Can be used
to comply with
2019 Title24
Part 6
JA8
High efficiency LED light
source requirements

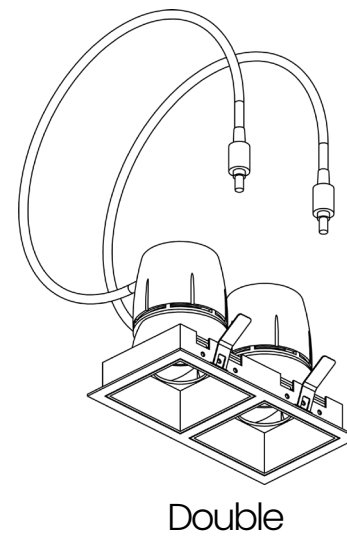



KYOKO

Key features

Up to 1400lm/ft
Up to 160lm/W
Up to 95 CRI
Dim to warm
RGBW

Application

Retail
Hospitality
Residential
Dressing Room

Installation type

Wall Mounted



Features to Benefits

Multiple shapes and sizes
High Lumen output
Dim to warm
High Color Rendering Index


Endless flexibility
Enhanced mirror refraction
Functional to cozy lighting
True and precise color rendering

Learn more about Kyoko 



CANATECH
S O L U T I O N S


KYOKO

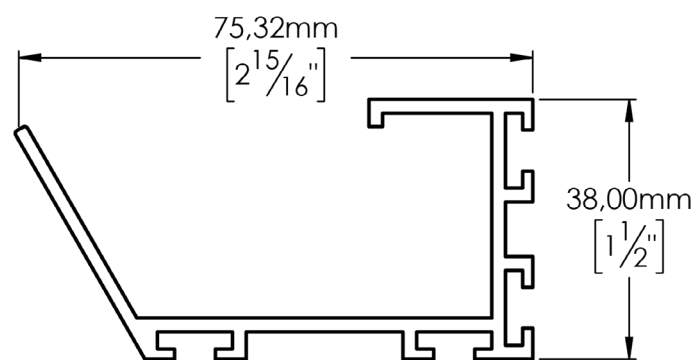

Other Features



IP44
RATED

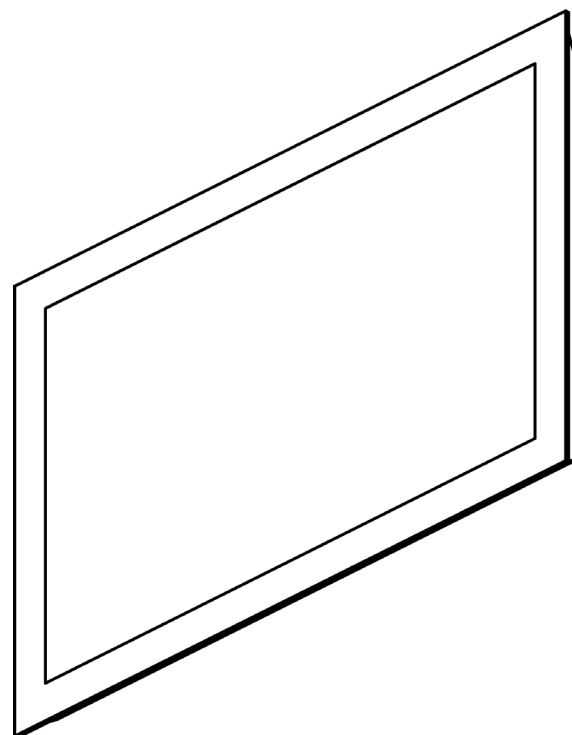


CANATECH
SOLUTIONS





MYLA

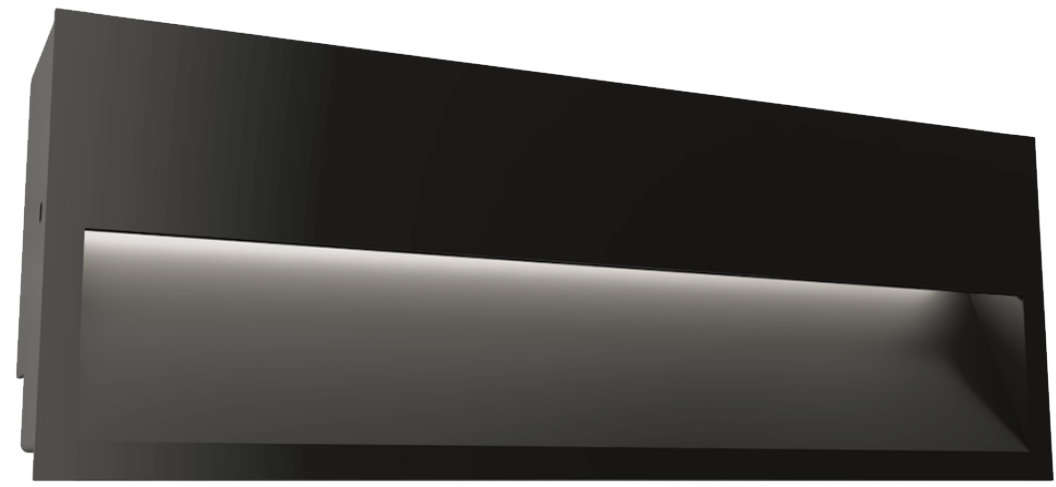

MYLA

Key features

- Up to 1400lm/ft
- Up to 160lm/W
- Up to 95 CRI
- Tunable white
- Dim to warm
- RGBW
- Wet location

Application

- Entrance Hall
- Hospitality
- Undercabinet
- Stairs

Installation type

Recessed



Features to Benefits


- Long continuous run
- Invisible mounting brackets
- Dots and pixelation free
- Suitable for damp and wet location

- Seamless lighting continuity
- Sleek and seamless installation
- Light uniformity
- Ideal for restroom and outdoor applications

Learn more about Myla 



MYLA

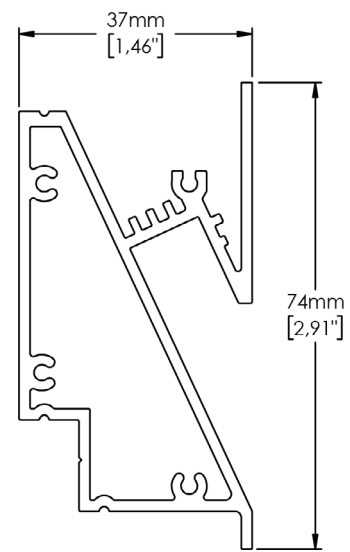

Other Features



IP20
RATED


IP44
RATED

IP67
RATED



Can be used
to comply with
2019 Title24
Part 6
JA8
High efficacy LED light
source requirements

LM79
LM80

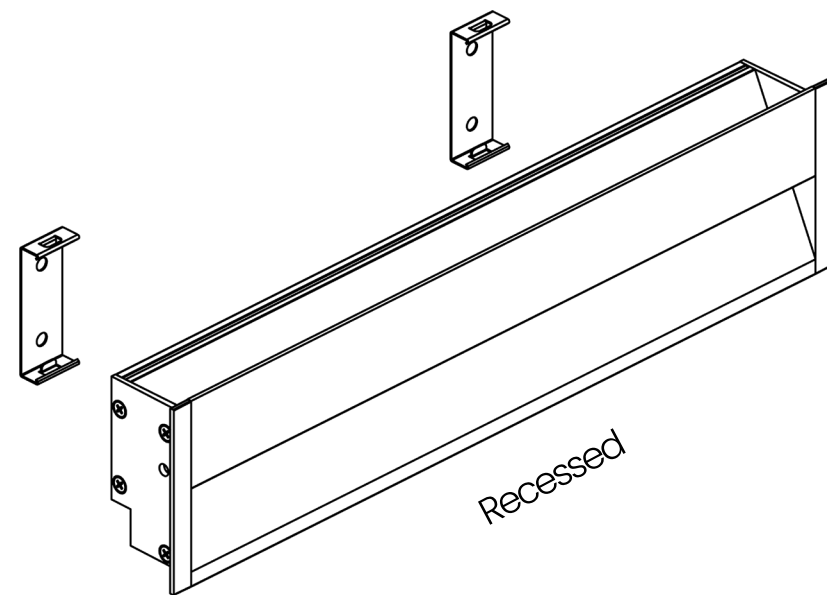

CANATECH
SOLUTIONS





PALAZO



PALAZO

Key features

Up to 2800lm
Up to 85lm/W
Up to 90 CRI

Application

Retail
Corridor
Hospitality
Residential

Installation type

Recessed Trim
Recessed Trimless



Features to Benefits





Toolless field installation
Multiple optics offers
High Lumen output
Customizable options

Fast onsite installation
Precise and targeted highlighting
Enhancing projects and products visibility
Endless creativity

Learn more about Palazo ▶



PALAZO

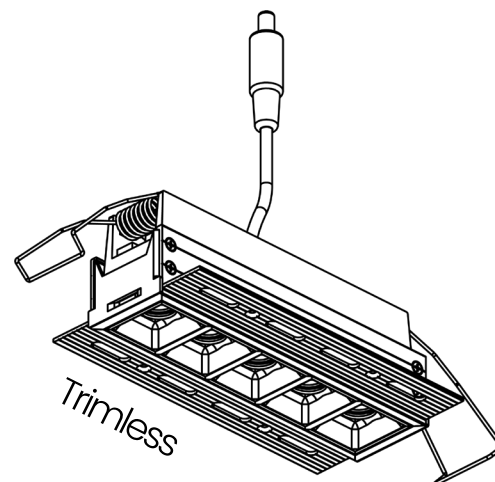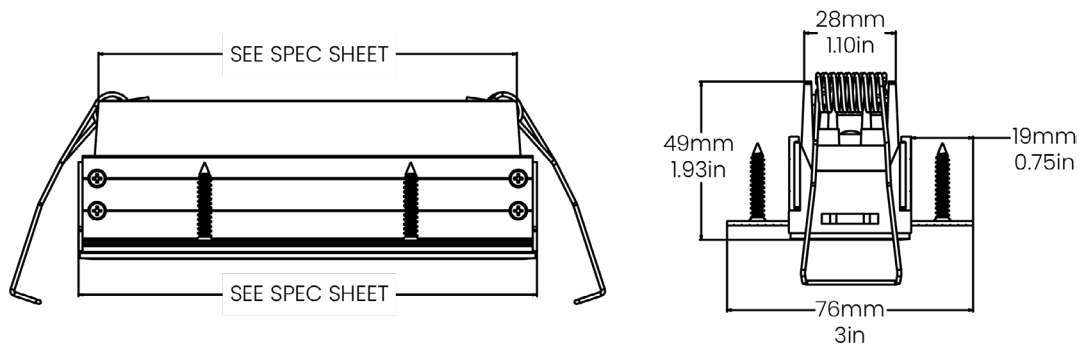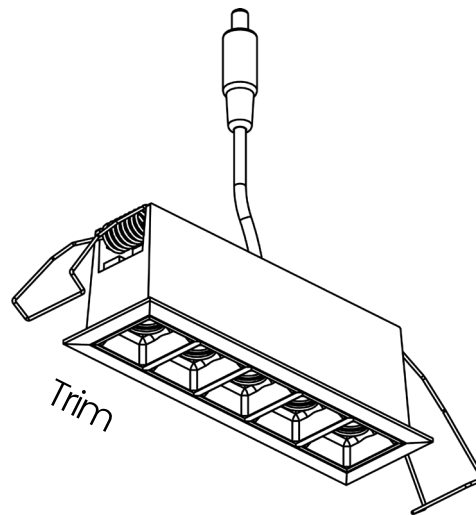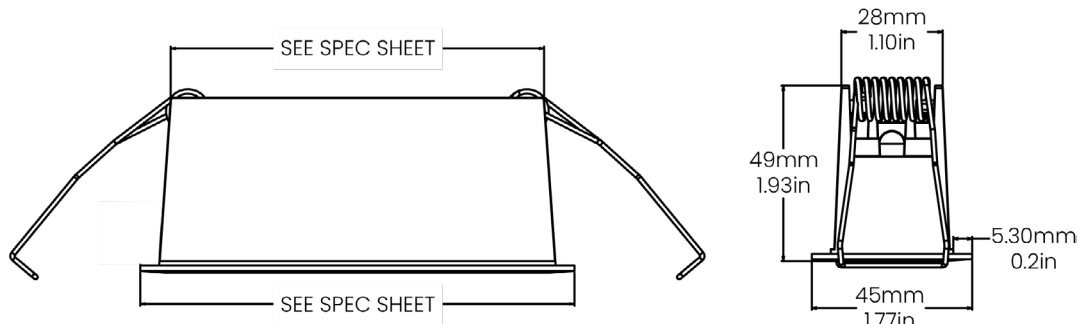

Other Features




IP20
RATED

Can be used
to comply with
2019 Title24
Part 6
JA8
High efficacy LED light
source requirements

CANATECH
SOLUTIONS



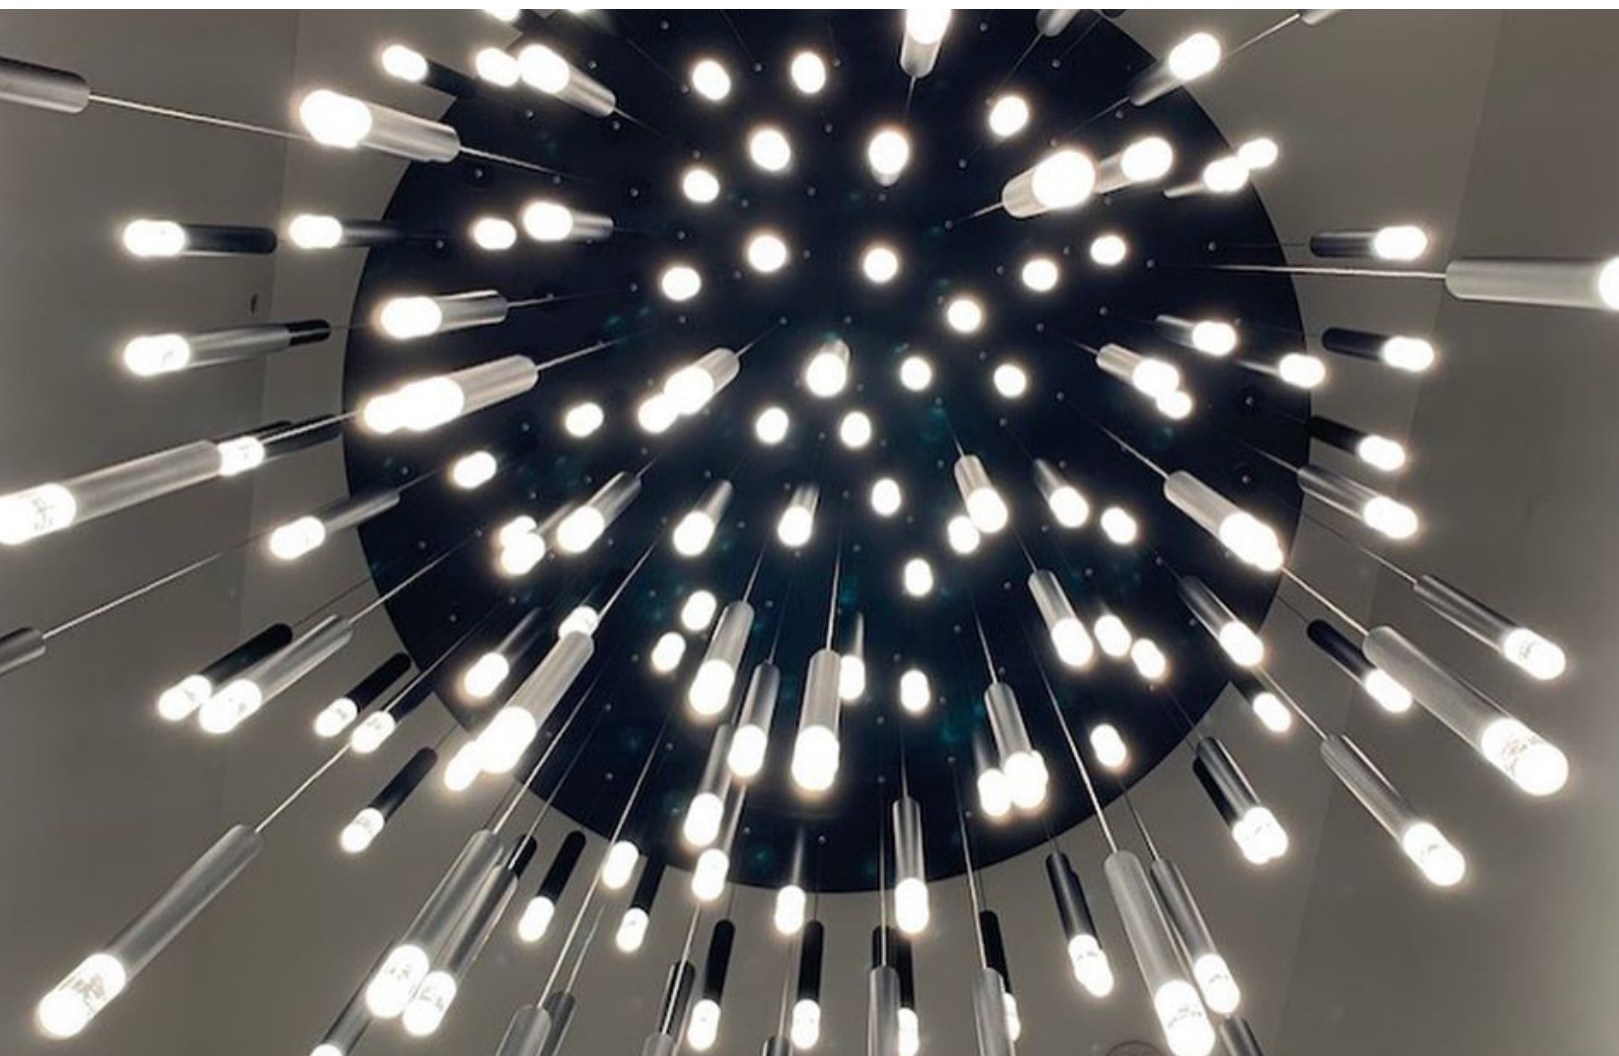

LIGHT DROP

Key features

Up to 790lm
Up to 72lm/W
Up to 90 CRI

Application

Residential
Retail
Commercial
Led Accent

Installation type

Suspended

Features to Benefits

Multiple optics offers
Customizable options
High Lumen output
Sleek and pure lines


Precise and targeted highlighting
Endless creativity
Enhancing projects and products visibility
Timeless design

Learn more about Light Drop 



CANATECH
S O L U T I O N S

LIGHT DROP

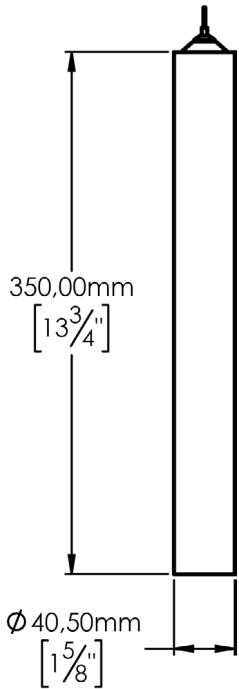

Other Features

5
year
warranty

+50,000hrs
lifespan

IP20
RATED

IP44
RATED

RoHS


c **UL** US

Can be used
to comply with
2019 Title24
Part 6
JA8
High efficacy LED light
source requirements

LM79
LM80

TM30

R9
80 - 99

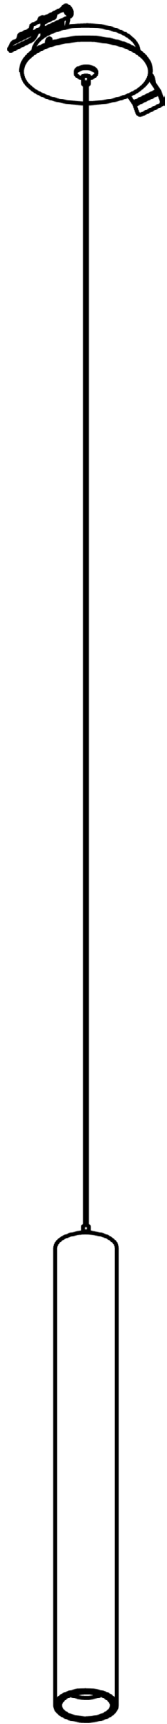

Suspended





ZOOMBAR



ZOOMBAR

Key features

Up to 1334lm
Up to 41lm/W - 86lm/W
Up to 90 CRI

Application

Residential
Retail
Commercial
Reception Desk

Installation type

Surface Mounted
Suspended

Features to Benefits

Field adjustable
High Lumen output
Customizable options
Sleek and pure lines



Precise and targeted highlighting
Enhancing projects and products visibility
Endless creativity
Timeless design

Learn more about Zoombar 




CANATECH
S O L U T I O N S

ZOOMBAR

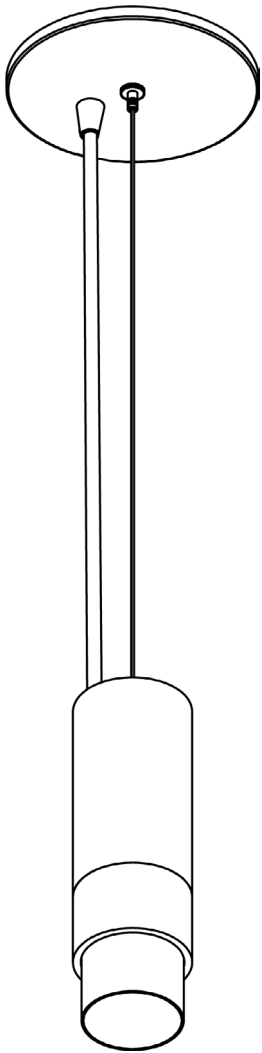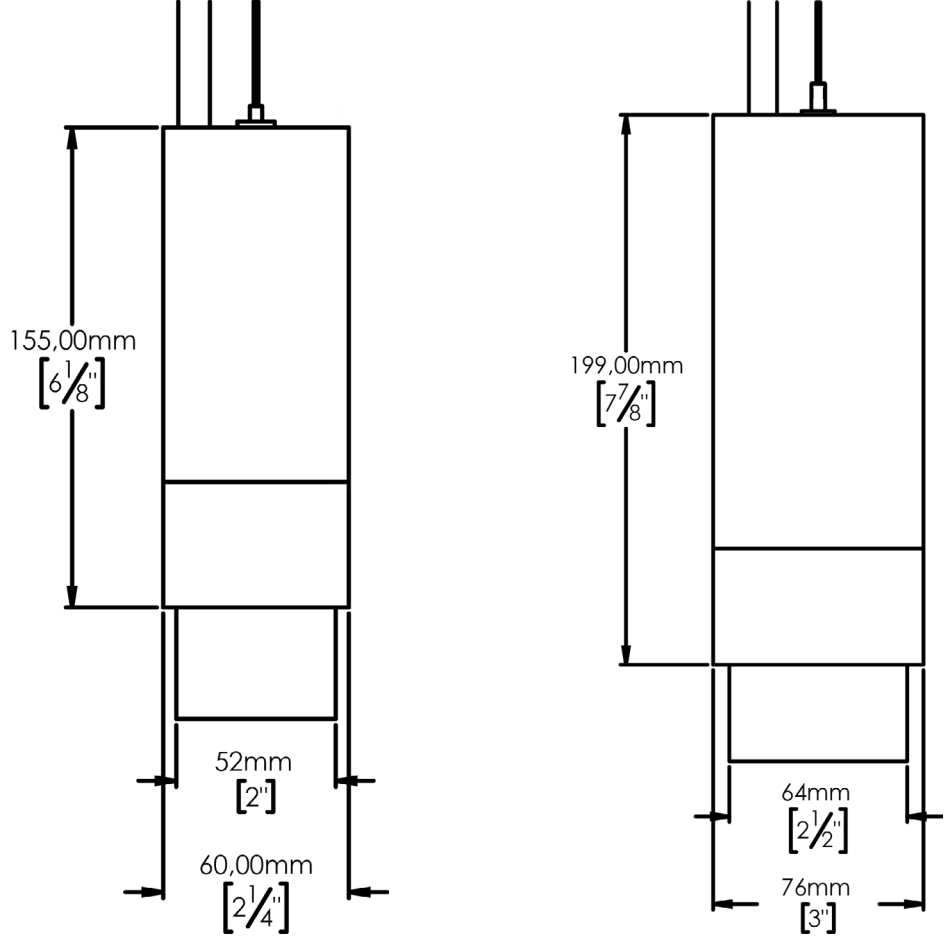

Suspended

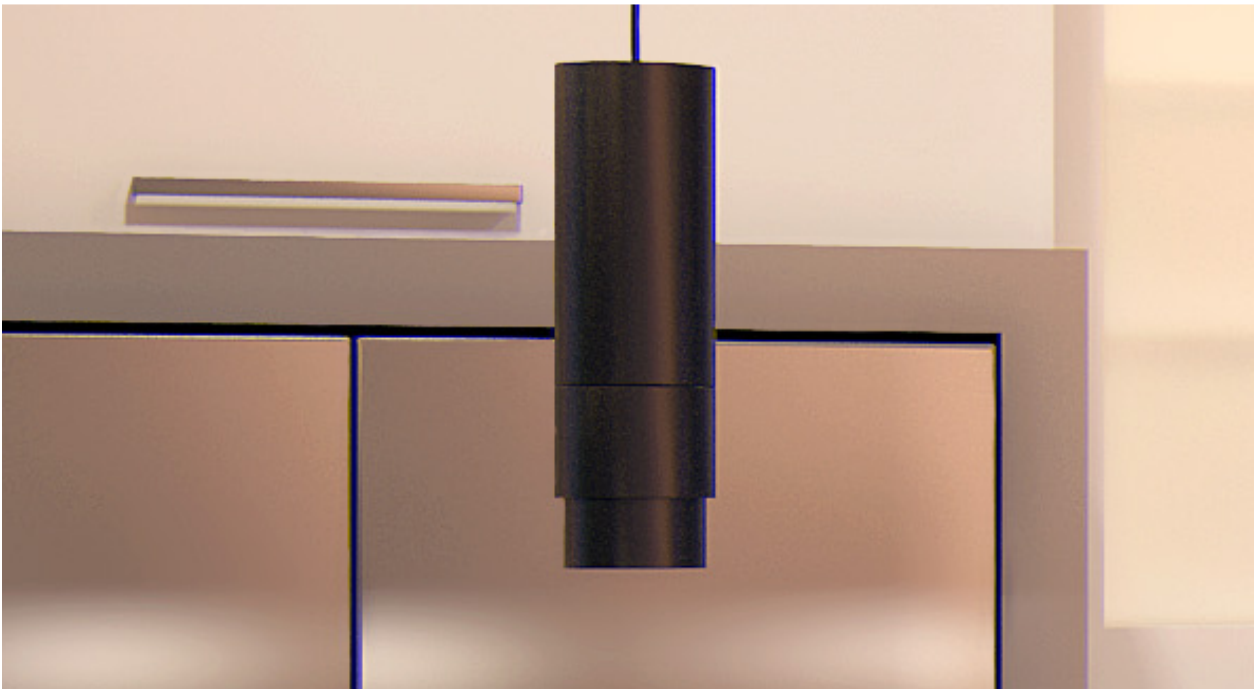

Other Features


5
year
warranty

+50,000hrs
lifespan

Can be used
to comply with
2019 Title24
Part 6
JA8
High efficacy LED light
source requirements



ZIA

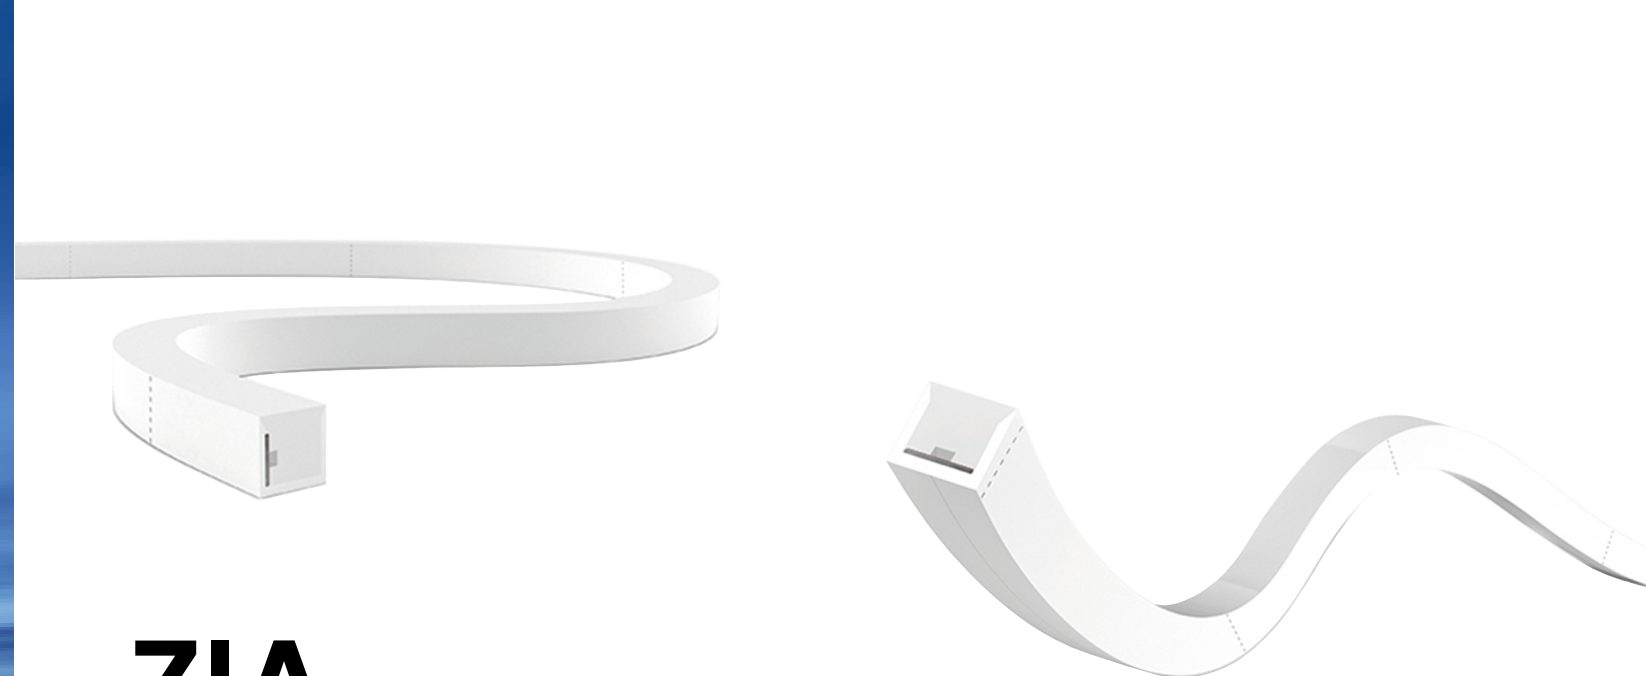

ZIA

Key features

DMX programmable
Pixel DMX programmable
Dimmable
- 0-10, 1-10, PWM
- ELV, MLV, TRIAC

Application

Convenient Cabinet
Facade
Handrail
Indoor/Outdoor
Swimming Pool
Wall Grazer

Installation type

Surface Mounted
Recessed
Recessed Trimless

Features to Benefits

Suitable for damp and wet location
Multiple optics offers
Multiple mounting options
Dim to warm
Multiple aluminum mounting profiles



Ideal for outdoor and water submerged applications
Endless creativity
Seamless lighting continuity
Ease of installation on irregular shapes
Easy to Install

Learn more about Zia 




CANATECH
S O L U T I O N S


ZIA

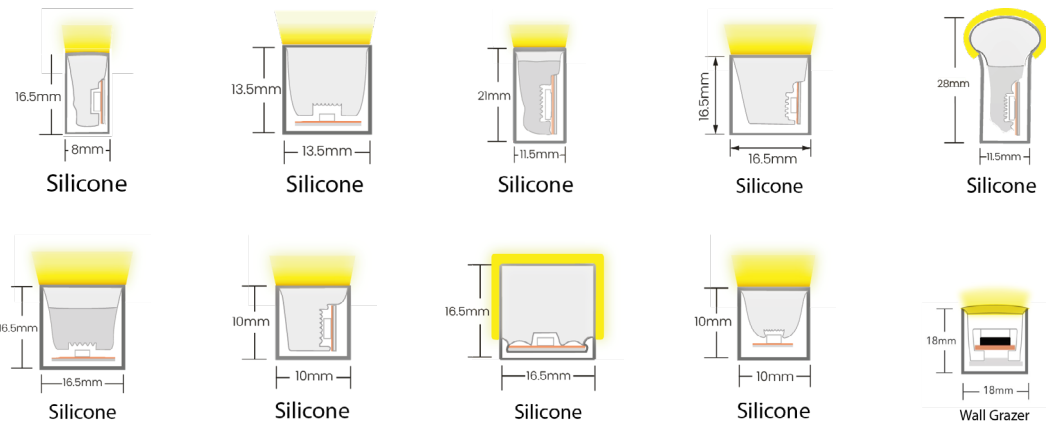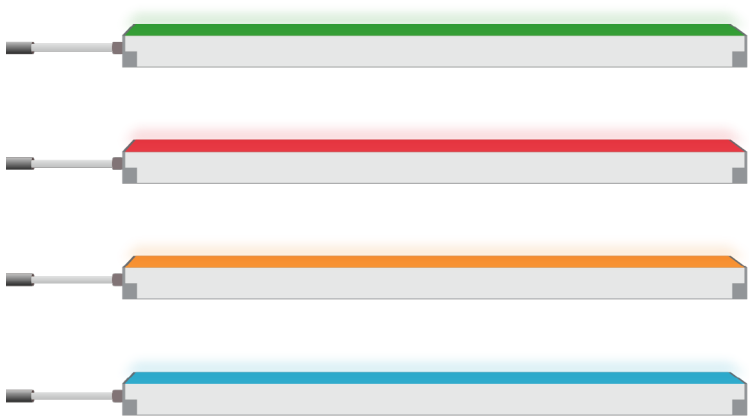


Colorimetry Information



Available colors

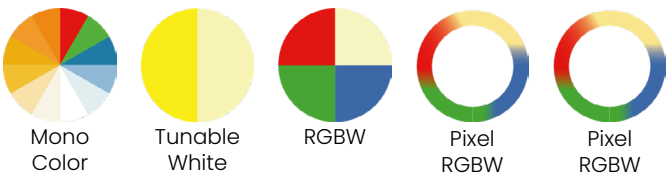

Other Features

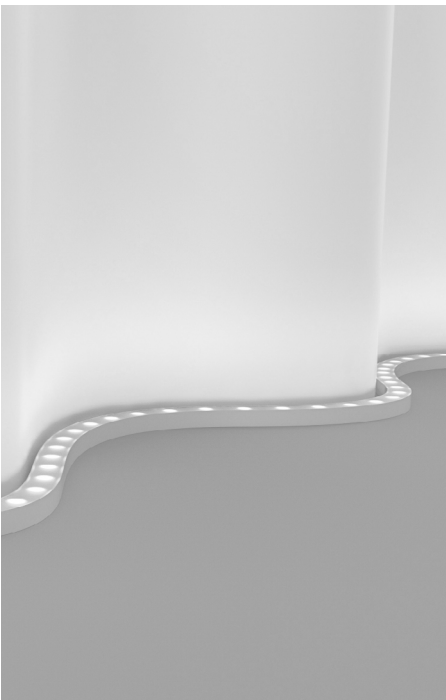



SWITCH

Key features

Constant Voltage
12VDC
Built-in-active PFC Function
Adjustable Range
Flicker-free

Application

Residential
Restaurant
Retail
Commercial

Installation type

Wall Mounted

Features to Benefits


Integrated driver
Suitable for damp location
Dim to Warm

Easy to Install
Ideal for outdoor and water submerged applications
Functional to cozy lighting




CANATECH
S O L U T I O N S

SWITCH

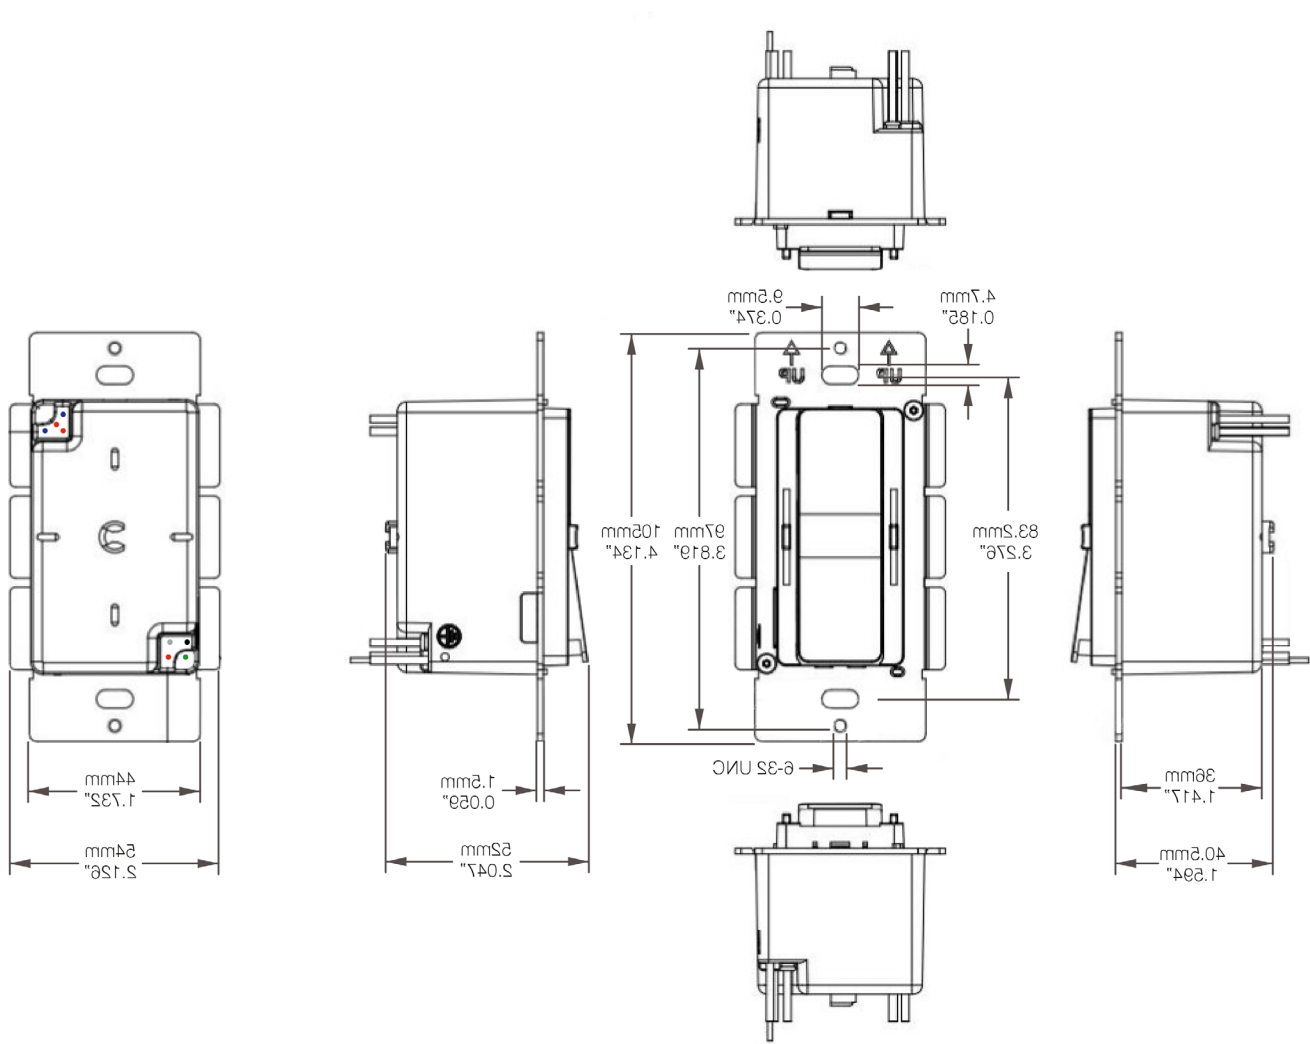

Dim to Warm Switch

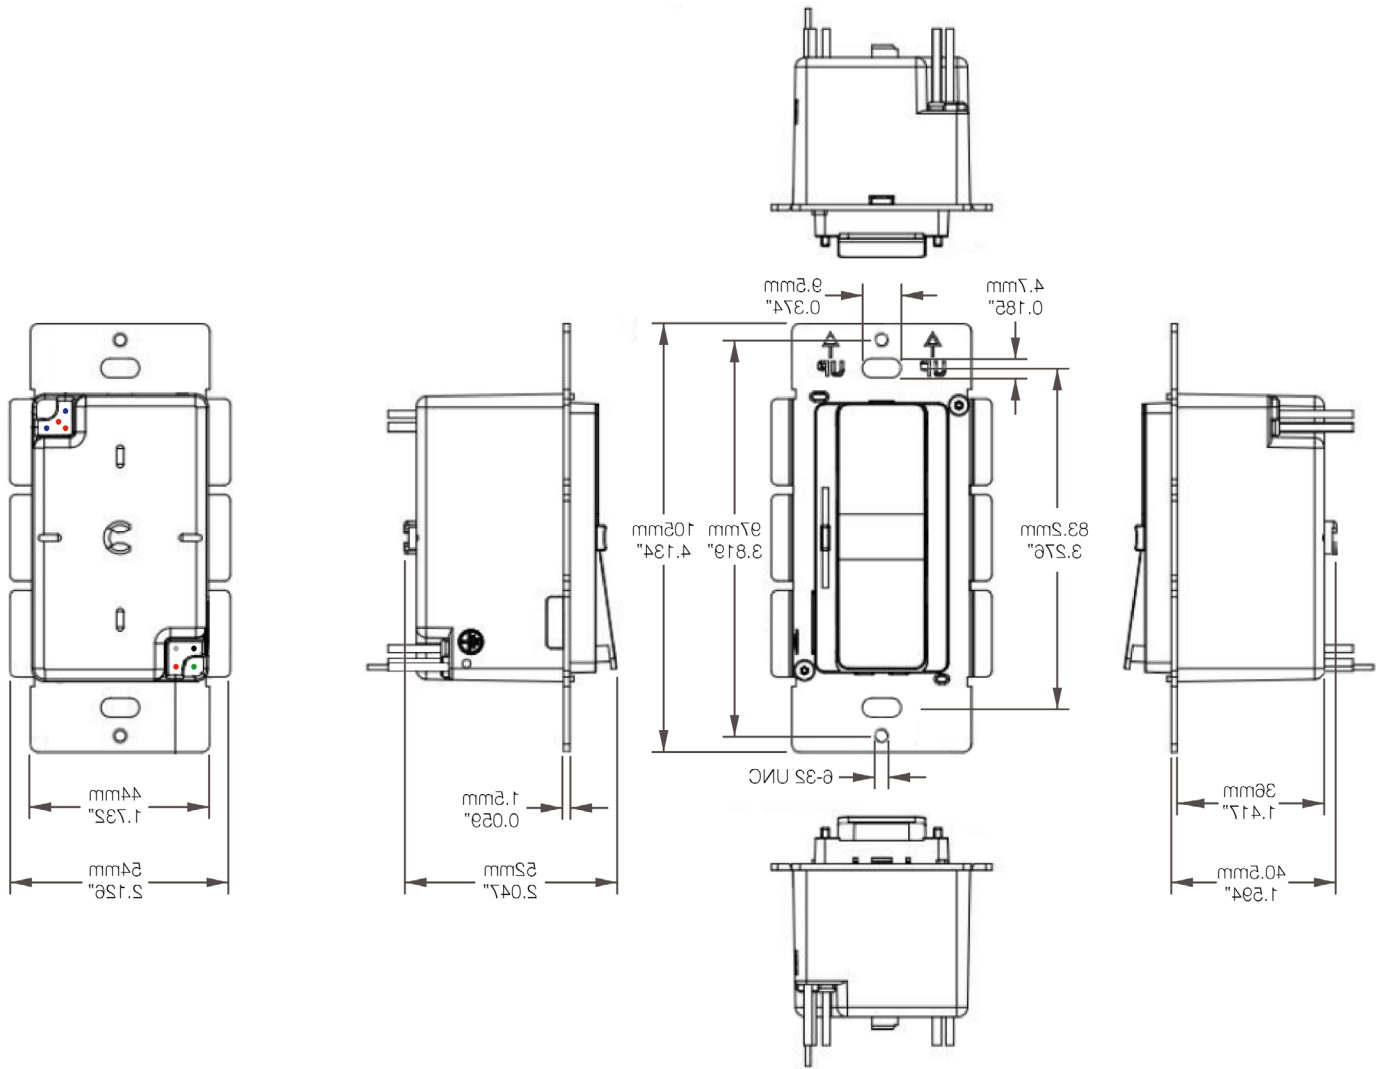

Tunable White Switch


Other Features

cULus FCC ClassP Class2 RoHS SELV  Reach



CANATECH
SOLUTIONS

Drivers & Suppliers

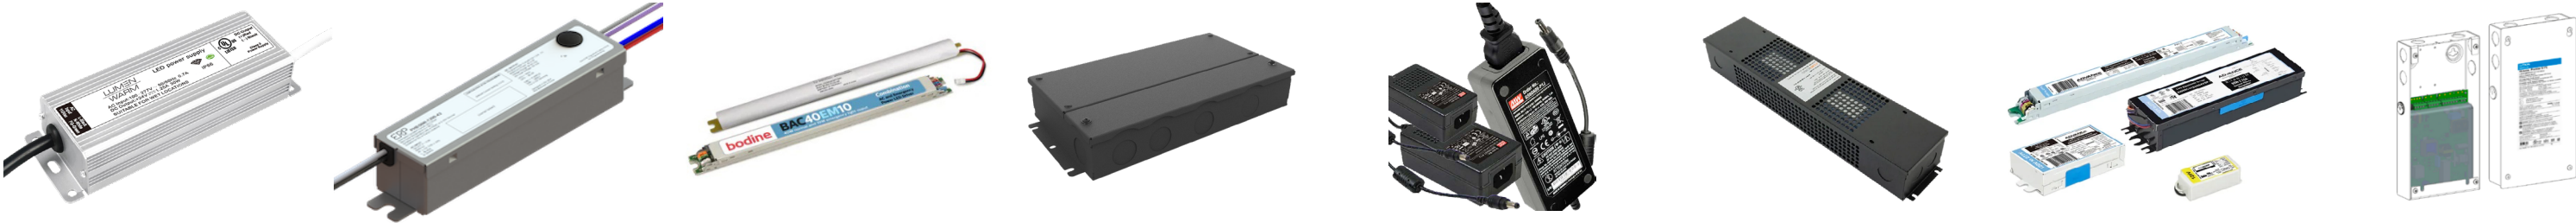

Dimming Type

- Triac (Leading Edge) – Standard phase-cut dimming for domestic wall dimmers.
- ELV (Trailing Edge) – Smooth dimming, ideal for LED loads.
- Fade – Gradual on/off dimming effect.
- Reverse Fade – Gradual off/on dimming effect (inverse fade).
- 0–10V – Analog low-voltage dimming with linear control.
- 1–10V – Analog dimming where 1 V = minimum brightness, preventing complete turn-off.

Protocols

